

LANDSAIL

SPRIT OF DRIVING



PRODUCT CATALOG

PRODUCT CATALOG

4 **MUDBLAZER M/T CLX9**
Mud-Terrain

8 **ROGUEBLAZER R/T CLX12**
Rough-Terrain

12 **RANGEBLAZER A/T CLX10**
All-Terrain

16 **STORMBLAZER CROSSOVER CLX20**
SUV/CUV

20 **ROADBLAZER H/T CLX11**
Highway

RELIABILITY



QUALITY +
CONFIDENCE

36 WARRANTIES

24 LS588 UHP
Ultra-High Performance

28 LS588 SUV
High Performance

32 LS388
Performance

+ RESEARCH

CLX9

MUDBLAZER M/T

MUD-TERRAIN



EQUIPPED FOR



Five years in the making, this Mud-Terrain tire is quality-equipped with everything you need to blaze through dirt, mud, sand, and snow.

3-PLY PUNCTURE GUARD

The sidewalls of the Mudblazer are constructed with three layers of polyester cord fabric and high-strength steel belts to combat sharp debris and rocks.

F-RATED OPTIONS

The F-Rated* 12-Ply construction gives higher carrying capacity and inflation pressure, so you have confidence when hauling your favorite equipment or recreation vehicles.

RAIN, MUD OR SNOW

The Mudblazer was designed to handle rough rain and mud conditions. The extended groove structure and the lateral groove structure work together to drain rain and snow, giving you better braking and handling.



LANDSAIL EQUIPPED

Three tough plies of high-strength steel belts and polyester cord fabric won't leave you stranded with a punctured sidewall. 12-Ply construction means the Mudblazer is F-RATED for towing, hauling, carrying, and inflation, and that you are equipped with the highest carrying capacity available.

*F-Rated tires available in select sizes.

CLX9

MUDBLAZER M/T

MUD-TERRAIN



Wheel Diameter	Article	Size	L/S	PLYLOAD	Rim Width	Tread Depth	Diameter	Section Width	Max Load	Max Load (Dual)	Max Pressure	RPM	UTQG	Weight
						1/32"	inch	inch	lbs	lbs	psi			lbs
15	010742	33X12.50R15LT	108Q	6PR/LRC	8.5-10.0-11.0	20	32.8	12.5	2205	/	35	634	/	58.86
	010759	35X12.50R15LT	113Q	6PR/LRC	8.5-10.0-11.0	20	34.8	12.5	2535	/	35	597	/	63.10
16	824387	LT245/75R16	108/104Q	6PR/LRC	6.5-7.0-8.0	18	30.5	9.8	2205	2006	50	682	/	43.13
	824394	LT285/75R16	116/113Q	6PR/LRC	7.5-8.0-9.0	20	32.8	11.3	2755	2535	50	633	/	56.47
	824400	LT285/75R16	126/123S	10PR/LRE	7.5-8.0-9.0	20	32.8	11.3	3750	3415	80	633	/	56.01
	824424	LT305/70R16	124/121S	10PR/LRE	8.0-9.0-9.5	20	32.8	12.2	3525	3195	65	633	/	59.01
17	010766	35X12.50R17LT	121Q	10PR/LRE	8.5-10.0-11.0	20	34.8	12.5	3195	/	65	597	/	65.85
	824417	LT285/70R17	121/118Q	10PR/LRE	7.5-8.5-9.0	20	32.8	11.5	3195	2910	80	634	/	56.19
18	010773	33X12.50R18LT	118Q	10PR/LRE	8.5-10.0-11.0	20	32.8	12.5	2910	/	65	634	/	61.44
	010780	35X12.50R18LT	123Q	10PR/LRE	8.5-10.0-11.0	20	34.8	12.5	3415	/	65	597	/	67.44
	010797	LT285/65R18	125/122Q	10PR/LRE	8.0-8.5-10.0	20	32.8	11.5	3640	3305	80	633	/	57.30
20	010803	33X12.50R20LT	114Q	10PR/LRE	8.5-10.0-11.0	19	32.8	12.5	2600	/	65	634	/	60.16
	010810	35X12.50R20LT	121Q	10PR/LRE	8.5-10.0-11.0	20	34.8	12.5	3195	/	65	597	/	64.90
	824431	LT275/60R20	123/120S	10PR/LRE	7.5-8.0-9.5	20	33.0	11.0	3415	3085	80	630	/	57.55
	824455	37X13.50R20LT	129R	12PR/LRF	8.5-11.0	20	36.5	13.6	4080	/	80	568	/	73.81
22	824448	LT325/50R22	122S	10PR/LRE	9.0-10.0-12.0	20	34.8	13.2	3305	/	65	596	/	70.44
	824462	33X12.50R22LT	123R	12PR/LRF	8.5-10.0-11.0	20	32.5	12.5	3415	/	80	639	/	61.62
	824479	37X13.50R22LT	129Q	12PR/LRF	8.5-11.0	20	36.5	13.6	4080	/	80	568	/	77.39
24	824486	35X13.50R24LT	126Q	12PR/LRF	8.5-11.0	20	34.8	13.6	3750	/	80	597	/	72.89
	824493	37X13.50R24LT	129Q	12PR/LRF	8.5-11.0	20	36.5	13.6	4080	/	80	568	/	76.81

This data can be changed by manufacturer without prior notice.



CLX12

ROGUEBLAZER R/T

ROUGH-TERRAIN



EQUIPPED FOR



The Rogueblazer is a hybrid tire designed for adventure and comfort. With the precise engineering of a Mud Tire and an All-Terrain tire, the Rogueblazer is more aggressive than a typical A/T and more refined than a typical M/T.

F-RATED CAPABILITY

The F-Rated* 12-Ply construction gives higher carrying capacity and inflation pressure, so you have confidence when hauling your favorite equipment or recreation vehicles.

3-PLY PUNCTURE GUARD

The sidewalls of the Rogueblazer are equipped with three layers of polyester cord fabric and high-strength steel belts to combat sharp debris and rocks.

ULTRA-STABLE SHOULDER

The shifting shapes of the large shoulder blocks are designed for improved handling and control through dirt, mud, sand, and snow.

ROUGH-CONDITION READY

The angled and varied long groove and lateral groove structure is deep and designed to promote better drainage, eject stones, and improve braking and handling on rough terrain.

CHOOSE YOUR SIDEWALL

Featuring dual sidewall designs, choose between the "R" or the "T" sidewall; both aggressive options prevent damage and enhance grip when driving in mud or rocky conditions.



LANDSAIL EQUIPPED

With Hybrid Technology, the Rogueblazer is more aggressive than a typical A/T and more refined than a typical M/T. These R/T 3-Ply sidewalls go the distance in extreme terrain and protect against punctures. The F-Rating is the highest standard for hauling and towing. Twelve tough plies get you to where you need to be with confidence.

*F-Rated tires available in select sizes.

CLX12


ROGUEBLAZER R/T

ROUGH-TERRAIN



Wheel Diameter	Article	Size	L/S	PLYLOAD	Rim Width	Tread Depth	Diameter	Section Width	Max Load	Max Load (Dual)	Max Pressure	RPM	UTQG	Weight
						1/32"	inch	inch	lbs	lbs	psi			lbs
16	824899	LT285/75R16	126/123S	10PR/LRE	7.5-8.0-9.0	16	32.8	11.3	3750	3415	80	633	/	52.63
17	824912	LT315/70R17	121/118S	10PR/LRE	8.0-9.5-11.0	16	34.4	12.7	3195	2910	65	604	/	61.92
	824943	LT305/65R17	121/118S	10PR/LRE	8.5-9.0-11.0	16	32.6	12.2	3195	2910	65	637	/	55.08
18	824905	LT305/70R18	126/123S	10PR/LRE	8.5-9.0-10.0	16	34.8	12.2	3750	3415	65	596	/	60.91
	824929	LT285/65R18	125/122S	10PR/LRE	8.0-8.5-10.0	16	32.6	11.5	3640	3305	80	638	/	53.29
	824936	LT325/65R18	127/124S	10PR/LRE	9.0-9.5-12.0	16	34.6	13.0	3860	3525	65	600	/	63.83
	824967	LT305/60R18	121/118S	10PR/LRE	8.5-9.0-11.0	16	32.4	12.2	3195	2910	65	641	/	57.47
20	824950	LT325/60R20	126/123S	10PR/LRE	9.0-9.5-12.0	16	35.4	13.0	3750	3415	65	587	/	66.53
	824974	LT275/60R20	123/120S	10PR/LRE	7.5-8.0-9.5	16	33.0	11.0	3415	3085	80	630	/	52.84
	824981	LT285/55R20	122/119S	10PR/LRE	8.0-9.0-10.0	16	32.4	11.7	3305	3000	80	642	/	57.22
	824998	LT305/55R20	121/118S	10PR/LRE	8.5-9.5-11.0	16	33.2	12.4	3195	2910	65	625	/	61.12
	825018	37X12.50R20LT	127R	12PR/LRF	8.5-10.0-11.0	16	36.5	12.5	3860	/	80	568	/	68.69
	825025	33X12.50R20LT	123R	12PR/LRF	8.5-10.0-11.0	16	32.5	12.5	3415	/	80	639	/	60.57
	825032	35X12.50R20LT	126R	12PR/LRF	8.5-10.0-11.0	16	34.5	12.5	3750	/	80	602	/	60.89
22	825049	33X12.50R22LT	123R	12PR/LRF	8.5-10.0-11.0	16	32.5	12.5	3415	/	80	639	/	59.65
	825056	35X12.50R22LT	126R	12PR/LRF	8.5-10.0-11.0	16	34.5	12.5	3750	/	80	602	/	66.75
	825063	37X13.50R22LT	129Q	12PR/LRF	8.5-11.0	16	36.5	13.6	4080	/	80	568	/	71.65
24	825001	LT325/45R24	127/124S	12PR/LRF	9.0-11.0-12.0	16	35.5	12.8	3860	3525	80	585	/	66.22
	825070	37X13.50R24LT	129Q	12PR/LRF	8.5-11.0	16	36.5	13.6	4080	/	80	568	/	72.42

This data can be changed by manufacturer without prior notice.

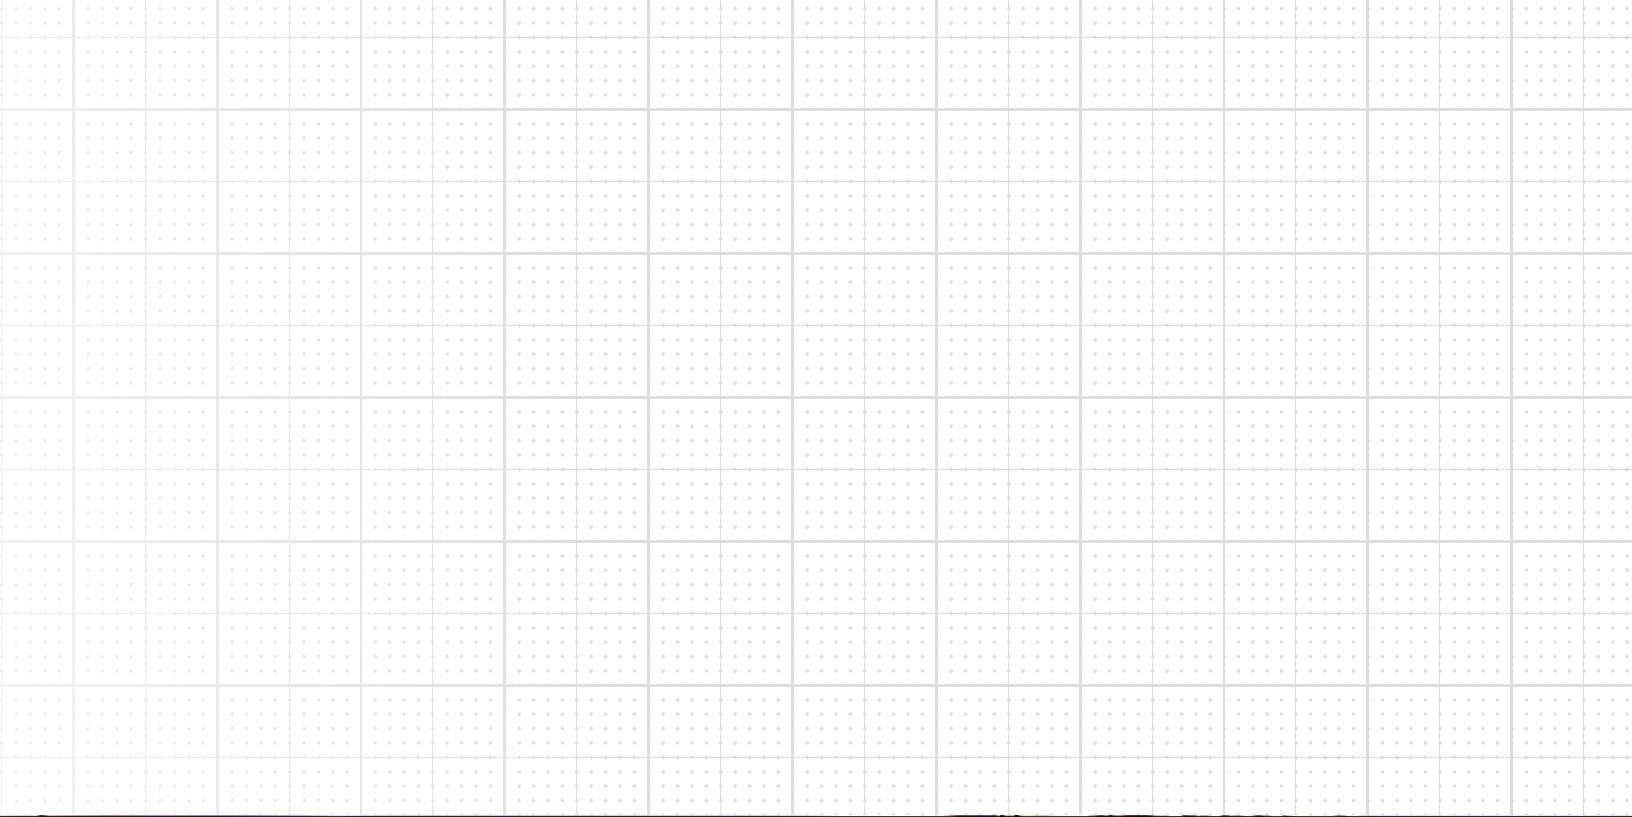

CLX10

RANGEBLAZER A/T

ALL-TERRAIN



EQUIPPED FOR



The Rangeblazer is a true 50K mile All-Terrain tire, built to stand the test of time. In rain, snow or dirt, this tire is reliable on a variety of roads and terrains.

STAGGERED MIDDLE BLOCK

Noise is reduced with the staggered middle tread block, while the sloped corners repel rocks and deliver serious grip.

HIGH-STABILITY TREAD

The tread design of the Rangeblazer is equipped with a quiet groove pattern to ensure driving stability and quiet comfort on the pavement. This tread is perfect for the size options that are F-Rated* for towing and hauling performance.

SEVERE SNOW READY

Built to the highest standards for snowy conditions, the Rangeblazer meets the industry standards to display the Three-Peak Mountain Snowflake/ Severe Snow Rated symbol (3PMSF).



LANDSAIL EQUIPPED

To get you where you need to be even in the worst of snowy conditions, the Rangeblazer meets the highest severe weather standards for an All-Terrain Tire so you can brave the elements with confidence. With 50K miles of warranted reliability, Landsail delivers quality through technology.

*F-Rated tires available in select sizes.

CLX10

RANGEBLAZER A/T

ALL-TERRAIN



Wheel Diameter	Article	Size	L/S	PLYLOAD	Rim Width	Tread Depth	Diameter	Section Width	Max Load	Max Load (Dual)	Max Pressure	RPM	UTQG	Weight
						1/32"	inch	inch	lbs	lbs	psi			lbs
15	823243	265/70R15	112T		7.0-8.0-9.0	13	29.6	10.7	2469	/	44	701	500/A/A	37.300
	010858	215/75R15	100T		5.5-6.0-7.0	13	27.7	8.5	1765	1610	44	750	500/A/A	27.80
	010865	LT235/75R15	104/101S	8PR/LRD	6.0-6.5-7.0	14	28.9	9.3	1985	1820	50	720	/	36.40
	010872	LT235/75R15	110/107S	8PR/LRD	6.0-6.5-7.0	14	28.9	9.3	2335	2150	65	720	/	36.40
	011121	31X10.50R15LT	109S	6PR/LRC	7.0-8.5-9.0	16	30.5	10.6	2270	/	50	681	/	41.66
16	010827	LT215/85R16	115/112S	10PR/LRE	5.5-6.0-7.0	14	30.4	8.5	2680	2470	80	683	/	37.04
	010834	LT235/85R16	120/116Q	10PR/LRE	6.0-6.5-7.5	14	31.7	9.3	3042	2778	80	655	/	42.36
	010889	LT225/75R16	115/112S	10PR/LRE	6.0-7.0	14	29.3	8.8	2680	2470	80	709	/	36.85
	010896	LT245/75R16	120/116S	10PR/LRE	6.5-7.0-8.0	16	30.5	9.8	3042	2778	80	682	/	41.30
	010902	LT265/75R16	123/120S	10PR/LRE	7.0-7.5-8.0	16	31.7	10.5	3415	3085	80	656	/	46.27
	010919	LT285/75R16	126/123S	10PR/LRE	7.5-8.0-9.0	17	32.8	11.3	3750	3415	80	633	/	54.19
	010957	LT235/70R16	104/101S	6PR/LRC	6.0-7.0-7.5	14	29.0	9.4	1985	1820	50	717	/	37.72
	010964	245/70R16	107H		6.5-7.0-8.0	13	29.5	9.8	2149	/	44	703	500/A/A	34.69
	010971	LT265/70R16	121/118S	10PR/LRE	7.0-8.0-8.5	16	30.6	10.7	3195	2910	80	678	/	45.06
	824516	LT315/75R16	127/124S	10PR/LRE	8.0-8.5-11.0	16	34.6	12.3	3860	3525	65	601	/	59.13
	824585	LT305/70R16	124/121S	10PR/LRE	8.0-9.0-9.5	16	32.8	12.2	3525	3195	65	633	/	54.88
	824592	245/70R16	111S		6.5-7.0-8.0	13	29.5	9.8	2403	/	49	703	500/A/A	36.60
17	010841	LT235/80R17	120/117S	10PR/LRE	6.0-6.5-7.5	14	31.8	9.3	3085	2835	80	653	/	41.14
	010926	LT245/75R17	121/118S	10PR/LRE	6.5-7.0-7.5	16	31.5	9.8	3195	2910	80	659	/	43.67
	010988	LT245/70R17	119/116S	10PR/LRE	6.5-7.0-8.0	16	30.6	9.8	3000	2755	80	680	/	41.58
	010995	LT265/70R17	121/118S	10PR/LRE	7.0-8.0-8.5	16	31.7	10.7	3195	2910	80	656	/	46.69
	011008	LT285/70R17	121/118Q	10PR/LRE	7.5-8.5-9.0	17	32.8	11.5	3195	2910	80	634	/	55.23
	011046	275/65R17	115V		7.5-8.0-9.5	16	31.1	11.0	2679	/	44	668	500/A/A	42.31
	011053	285/65R17	116H		8.0-8.5-10.0	17	31.6	11.5	2756	/	44	658	500/A/A	44.18
	020314	275/65R17	115H		7.5-8.0-9.5	16	31.1	11.0	2679	/	44	668	500/A/A	42.31
	824578	LT315/70R17	121/118S	10PR/LRE	8.0-9.5-11.0	16	34.4	12.7	3195	2910	65	604	/	62.68
	824684	LT305/65R17	121/118S	10PR/LRE	8.5-9.0-11.0	16	32.6	12.2	3195	2910	65	637	/	60.56

Wheel Diameter	Article	Size	L/S	PLYLOAD	Rim Width	Tread Depth	Diameter	Section Width	Max Load	Max Load [Dual]	Max Pressure	RPM	UTQG	Weight
						1/32"	inch	inch	lbs	lbs	psi			lbs
18	011015	LT265/70R18	124/121S	10PR/LRE	7.0-8.0-9.0	16	32.6	10.7	3525	3195	80	636	/	49.06
	011022	LT275/70R18	125/122S	10PR/LRE	7.0-8.0-8.5	16	33.2	11.0	3640	3305	80	626	/	50.09
	011060	LT275/65R18	123/120S	10PR/LRE	7.5-8.0-9.0	16	32.1	11.0	3415	3085	80	647	/	49.45
	011077	LT285/65R18	125/122T	10PR/LRE	8.0-8.5-10.0	17	32.6	11.5	3640	3305	80	638	/	53.78
	824561	LT305/70R18	126/123S	10PR/LRE	8.5-9.0-10.0	16	34.8	12.2	3750	3415	65	596	/	58.91
	824660	LT285/65R18	125/122R	10PR/LRE	8.0-8.5-10.0	16	32.6	11.5	3640	3305	80	638	/	53.78
	824677	LT325/65R18	127/124S	10PR/LRE	9.0-9.5-12.0	16	34.6	13.0	3860	3525	65	600	/	58.40
	824752	LT305/60R18	121/118S	10PR/LRE	8.5-9.0-11.0	16	32.4	12.2	3195	2910	65	641	/	53.01
20	011084	LT275/65R20	126/123S	10PR/LRE	7.5-8.0-9.5	16	34.1	11.0	3750	3415	80	609	/	54.33
	011107	LT265/60R20	121/118S	10PR/LRE	7.5-8.0-9.5	16	32.5	10.7	3195	2910	80	639	/	48.46
	011114	LT285/60R20	125/122S	10PR/LRE	8.0-8.5-10.0	17	33.5	11.5	3640	3305	80	621	/	54.04
	824738	LT275/60R20	123/120S	10PR/LRE	7.5-8.0-9.5	16	33.0	11.0	3415	3085	80	630	/	56.63
	824745	275/60R20	118H		7.5-8.0-9.5	13	33.0	11.0	2910	/	49	630	500/A/A	45.31
	824769	LT325/60R20	126/123S	10PR/LRE	9.0-9.5-12.0	16	35.4	13.0	3750	3415	65	587	/	65.18
	824783	LT285/55R20	122/119S	10PR/LRE	8.0-9.0-10.0	16	32.4	11.7	3305	3000	80	642	/	53.27
	824790	LT305/55R20	121/118S	10PR/LRE	8.5-9.5-11.0	16	33.2	12.4	3195	2910	65	625	/	57.76
	824806	275/55R20	118H		7.5-8.5-9.5	13	31.9	11.2	2910	/	49	651	500/A/A	43.21
	824813	LT275/55R20	120/117S	10PR/LRE	7.5-8.5-9.5	16	31.9	11.2	3085	2835	80	651	/	50.99
	824820	LT265/50R20	121/118S	10PR/LRE	7.5-8.5-9.5	16	30.5	10.9	3195	2910	80	682	/	48.09
	824851	35X12.50R20LT	126R	12PR/LRF	8.5-10.0-11.0	16	34.5	12.5	3750	/	80	602	/	63.05
22	824882	37X12.50R20LT	127R	12PR/LRF	8.5-10.0-11.0	16	36.5	12.5	3860	/	80	568	/	66.61
	824837	285/45R22	116H		9.0-9.5-10.5	13	32.1	11.2	2756	/	49	647	500/A/A	43.16
	824868	33X12.50R22LT	123S	12PR/LRF	8.5-10.0-11.0	16	32.5	12.5	3415	/	80	639	/	59.71
24	824875	35X12.50R22LT	126R	12PR/LRF	8.5-10.0-11.0	16	34.5	12.5	3750	/	80	602	/	63.08
	824844	285/40R24	118H		9.5-10.0-11.0	13	33.0	11.4	2910	/	49	630	500/A/A	45.38

This data can be changed by manufacturer without prior notice.

NEW PRODUCT

CLX20

STORMBLAZER CROSSOVER SUV/CUV



EQUIPPED FOR



The Stormblazer Crossover is a hybrid tire created for popular CUV/SUV vehicles in over 50 sizes. With dual sidewall design options, this tire has the durability to get you wherever the journey takes you. Our most popular PLT sizes are currently available, with a 12-Ply rating in specific sizes.

AGGRESSIVE TREAD DESIGN

This aggressive tread design with block-edge steps, open shoulders, and stone ejectors delivers excellent off-road traction while maintaining great on-road performance for both wet and dry conditions.

ALL-WEATHER ENGINEERING

The continuous zig-zag grooves on the shoulders and the center X-shaped grooves are connected to help evacuate rain, mud, and snow, improving overall handling in all-weather conditions.

THREE-STEP TREAD BLOCK

The tread block edge step-down design improves traction and is combined with a serrated shoulder block design to enhance snow and off-road traction.

STONE EJECTORS

Stone Ejectors help remove mud to improve traction and eject stones, effectively preventing block damage.

STEEL CORD BELT

The ultra high-strength steel cord belt construction improves puncture resistance, steering response, and tread wear. The seamless construction ensures smoother driving and provides improved durability.

LANDSAIL EQUIPPED

Made Specifically for OE Fitments: Subaru Outback, Toyota RAV4, Subaru Crosstrek, Honda CR-V, Jeep Renegade Trailhawk, Mazda CX-5, Nissan Rogue, Ford Escape, Jeep Cherokee.



DUAL SIDEWALL DESIGN

The unique aggressive design extends from tread shoulder block to sidewall, protecting against sharp rocks, and providing additional off-road traction, especially in off-camber situations. This feature also improves high-speed performance, handling stability, and riding comfort.

NANO SILICA COMPOUND

The Nano Grade Silica reinforces the tread compound, which balances the tread wear and traction. This tire performs in low temperatures, improving snow traction.

HAULING CAPABILITY

The Stormblazer is available in load-range F size options for high load carrying capability. The LT metric and flotation sizes (except for 31x10.50R15LT) are available in a 3-ply design.

CLX20

STORMBLAZER CROSSOVER SUV/CUV



Wheel Diameter	Article	Size	L/S	PLYLOAD	Rim Width	Tread Depth	Diameter	Section Width	Max Load	Max Dual Load	Max Pressure	RPM	UTQG	Weight
						1/32"	inch	inch	lbs	lbs	psi			lbs
15	834959	P235/75R15	105T	/	6.0-6.5-8.0	12	28.9	9.3	2039	/	44	720	660AA	
	834942	31x10.50R15LT	109Q	6PR/LRC	7.0-8.5-9.0	17	30.5	10.6	2270	/	50	681	/	
16	834980	LT295/75R16	123/120Q	8PR/LRD	7.5-8.0-10.0	17	33.4	11.6	3415	3085	65	622	/	
	834720	LT315/75R16	127/124S	10PR/LRE	8.0-8.5-10.5	18	34.6	12.3	3860	3525	65	601	/	
	834706	LT285/75R16	126/123Q	10PR/LRE	7.5-8.0-9.5	18	32.8	11.3	3750	3415	80	633	/	
	834713	LT305/70R16	124/121S	10PR/LRE	8.0-9.0-10.0	18	32.8	12.2	3525	3195	65	633	/	
	834966	205/70R16	97H	/	5.0-6.0-7.0	12	27.3	8.2	1609		44	760	660AA	
	834973	215/70R16	100H	/	5.5-6.5-7.0	12	27.9	8.7	1764		44	745	660AA	
	834690	215/65R16	98H	/	6.0-6.5-7.5	12	27.0	8.7	1653		44	769	660AA	
	834393	225/55R17	101V	/	6.0-7.0-8.0	12	26.8	9.2	1819		50	776	660AA	
17	834744	235/55R17	103W	/	6.5-7.5-8.5	12	27.2	9.6	1929		50	765	660AA	
	834737	215/60R17	100H	/	6.0-6.5-7.5	12	27.2	8.7	1764		50	765	660AA	
	834409	225/60R17	99H	/	6.0-6.5-8.0	12	27.6	9.0	1709		44	751	660AA	
	834751	235/60R17	102H	/	6.5-7.0-8.5	12	28.1	9.4	1874		44	739	660AA	
	834386	215/65R17	99H	/	6.0-6.5-7.5	12	28.0	8.7	1709		44	741	660AA	
	834416	225/65R17	102H	/	6.0-6.5-8.0	12	28.5	9.0	1874		44	729	660AA	
	834423	235/65R17	108H	/	6.5-7.0-8.5	12	29.1	9.4	2205		50	715	660AA	
	834430	245/65R17	107H	/	7.0-7.0-8.5	12	29.5	9.8	2149		44	703	660AA	
	834997	LT305/65R17	121/118S	10PR/LRE	9.0-11.0	17	32.6	12.2	3195	2910	65	637	/	
	834782	LT265/70R17	121/118Q	10PR/LRE	7.0-8.0-9.0	18	31.7	10.7	3195	2910	80	656	/	
	834447	LT285/70R17	121/118Q	10PR/LRE	7.5-8.5-9.5	18	32.8	11.5	3195	2910	80	634	/	
	834805	LT295/70R17	121/118Q	10PR/LRE	7.5-8.5-10.0	18	33.3	11.8	3195	2910	80	624	/	
	834454	LT315/70R17	121/118S	10PR/LRE	8.0-9.5-10.5	18	34.4	12.7	3195	2910	65	604	/	
	834799	LT285/75R17	121/118Q	10PR/LRE	7.5-8.0-9.5	17	33.9	11.3	3195	2910	80	613	/	
	834768	35x12.50R17LT	121Q	10PR/LRE	8.0-10.0-10.5	19	34.5	12.5	3195		65	602	/	
	834775	37x12.50R17LT	124Q	8PR/LRD	8.0-10.0-10.5	18	36.5	12.5	3525		50	568	/	

Wheel Diameter	Article	Size	L/S	PLYLOAD	Rim Width	Tread Depth	Diameter	Section Width	Max Load	Max Dual Load	Max Pressure	RPM	UTQG	Weight
						1/32"	inch	inch	lbs	lbs	psi			lbs
18	834539	35x12.50R18LT	123Q	10PR/LRE	8.5-10.0-11.0	19	34.5	12.5	3415		65	602	/	
	834829	235/50R18	101W	/	6.5-7.5-8.5	12	27.3	9.6	1819		50	761	660AA	
	834812	215/55R18	99V	/	6.0-7.0-7.5	12	27.3	8.9	1709		50	761	660AA	
	834461	225/55R18	102W	/	6.0-7.0-8.0	12	27.8	9.2	1874		50	748	660AA	
	834836	235/55R18	104V	/	6.5-7.5-8.5	12	28.1	9.6	1984		50	738	660AA	
	834843	255/55R18	109W	/	7.0-8.0-9.0	12	29.0	10.4	2271		50	716	660AA	
	834478	225/60R18	104V	/	6.0-6.5-8.0	12	28.6	9.0	1984		50	726	660AA	
	834485	235/60R18	107V	/	6.5-7.0-8.5	12	29.1	9.4	2149		50	714	660AA	
	834508	245/60R18	105V	/	7.0-8.5	12	29.6	9.8	2039		44	702	660AA	
	835048	LT305/60R18	121/118S	10PR/LRE	9.0-11.0	17	32.4	12.2	3195	2910	65	641	/	
	835062	LT325/60R18	124/121S	10PR/LRE	9.5-11.5	18	33.3	13.0	3525	3195	65	623	/	
	834492	235/65R18	110H	/	6.5-7.0-8.5	12	30.0	9.4	2337		50	691	660AA	
	834850	255/65R18	111H	/	7.0-7.5-9.0	12	31.1	10.2	2403		44	669	660AA	
	834867	265/65R18	114H	/	7.5-8.0-9.5	12	31.5	10.7	2601		44	659	660AA	
	834874	275/65R18	116H	/	7.5-8.0-9.5	12	32.1	11.0	2756		44	647	660AA	
	834553	LT285/65R18	125/122Q	10PR/LRE	8.5-10.0	18	32.6	11.5	3640	3305	80	638	/	
	835079	LT325/65R18	127/124S	10PR/LRE	9.5-11.5	18	34.6	13.0	3860	3525	65	600	/	
	835017	LT275/70R18	125/122S	10PR/LRE	7.0-8.0-9.0	17	33.2	11.0	3640	3305	80	626	/	
	835031	LT295/70R18	129/126Q	10PR/LRE	7.5-8.5-10.0	17	34.3	11.8	4080	3750	80	606	/	
	835055	LT305/70R18	126/123S	10PR/LRE	8.0-9.0-10.0	17	34.8	12.2	3750	3415	65	596	/	
	835024	LT285/75R18	129/126Q	10PR/LRE	7.5-8.0-9.5	17	34.8	11.3	4080	3750	80	596	/	
19	834515	33x12.50R18LT	118Q	10PR/LRE	8.5-10.0-11.0	18	32.5	12.5	2910		65	639	/	
	835000	37x13.50R18LT	128Q	10PR/LRE	9.0-11.0-11.5	19	36.5	13.6	3970		65	568	/	
	835086	225/55R19	99H	/	6.0-7.0-8.0	12	28.8	9.2	1709		44	722	660AA	
	834881	235/55R19	105W	/	6.5-7.5-8.5	12	29.2	9.6	2039		50	712	660AA	
	835093	245/55R19	103W	/	7.0-7.5-8.5	12	29.6	10.0	1929		44	701	660AA	
	834898	255/55R19	111V	/	7.0-8.0-9.0	12	30.0	10.4	2403		50	691	660AA	
20	835109	255/60R19	109H	/	7.0-7.5-9.0	12	31.1	10.2	2271		44	669	660AA	
	834560	245/50R20	102W	/	7.0-7.5-8.5	12	29.7	10.0	1874		44	700	660AA	
	834904	255/50R20	109W	/	7.0-8.0-9.0	12	30.1	10.4	2271		50	690	660AA	
	834911	265/50R20	107T	/	7.5-8.5-9.5	12	30.5	10.9	2149		44	682	660AA	
	835116	255/55R20	110V	/	7.0-8.0-9.0	12	31.0	10.4	2337		50	669	660AA	
	834577	275/55R20	113T	/	7.5-8.5-9.5	12	31.9	11.2	2535		44	651	660AA	
	834928	LT285/55R20	122/119Q	10PR/LRE	8.5-9.0-10.0	17	32.4	11.7	3305	3000	80	642	/	
	834621	LT305/55R20	121/118S	10PR/LRE	9.0-9.5-11.0	17	33.2	12.4	3195	2910	65	625	/	
	834584	35x12.50R20LT	121Q	10PR/LRE	8.5-10.0-11.0	19	34.5	12.5	3195		65	602	/	
22	834607	37x12.50R20LT	126Q	10PR/LRE	8.5-10.0-11.0	19	36.5	12.5	3750		65	568	/	
	835123	285/45R22	114T	/	9.0-9.5-10.5	12	32.1	11.2	2601		50	647	660AA	
	834638	275/50R22	111H	/	7.5-8.5-9.5	12	32.9	11.2	2403		44	632	660AA	
	835130	285/50R22	115T	/	8.0-9.0-10.0	12	33.3	11.7	2679		44	624	660AA	
	835147	LT285/50R22	121/118Q	10PR/LRE	8.0-9.0-10.0	17	33.3	11.7	3195	2910	80	624	/	
	835154	LT285/55R22	124/121Q	10PR/LRE	8.5-9.0-10.0	17	34.4	11.7	3525	3195	80	604	/	
	834645	33x12.50R22LT	109Q	10PR/LRE	8.5-10.0-11.0	18	32.5	12.5	2270		65	639	/	
	834669	35x12.50R22LT	117Q	10PR/LRE	8.5-10.0-11.0	19	34.5	12.5	2835		65	602	/	
	834935	37x12.50R22LT	127Q	12PR/LRF	8.5-10.0-11.0	19	36.5	12.5	3860		80	568	/	
24	835161	285/40R24	118V	/	9.5-10.0-11.0	12	33.0	11.4	2910		50	630	660AA	
	834683	33x12.50R24LT	104Q	10PR/LRE	10.5-11.5-12.5	18	32.5	12.6	1985		65	639	/	

This data can be changed by manufacturer without prior notice.

CLX11

ROADBLAZER H/T

HIGHWAY



EQUIPPED FOR



The Roadblazer is a Premium 50K Highway-Terrain tire designed for high traction and quiet comfort – exactly what you expect from a high-quality highway tire.

NOISE REDUCING ENGINEERING

We closed the shoulder of the Roadblazer to block noise coming from the center of the tire, giving the experience of a quiet and smooth ride while meeting and exceeding the quality of any original equipment highway tire.

PREMIUM TREAD DESIGN

This premium tread design is equipped with a consistent middle tread pattern, which increases and gives you more confidence. The closed shoulder increases the comfort of a quiet ride.

LONG TRACTION GROOVES

We added the long groove design for efficient drainage, fast braking, improved acceleration, and stable turning in wet terrain.



LANDSAIL EQUIPPED

With 50K miles of warranted peace-of-mind, the Roadblazer is a long-wearing Premium Highway Terrain tire purpose-built for comfort and reliability. Landsail delivers quality through technology.

CLX11

ROADBLAZER H/T

HIGHWAY



Wheel Diameter	Article	Size	L/S	PLY-LOAD	Rim Width	Tread Depth	Diameter	Section Width	Max Load	Max Load [Dual]	Max Pressure	RPM	UTQG	Weight
						1/32"	inch	inch	lbs	lbs	psi			lbs
16	809520	LT235/85R16 LRE	120/116S		6.0-6.5-7.5	14	31.6	8.9	3042	2778	80	658	/	42.36
	011138	LT215/85R16 LRE	115/112S		5.5-6.0-7.0	14	30.4	9.0	2680	2470	80	683	/	37.04
	011152	LT225/75R16 LRE	115/112S		6.0-7.0	14	29.3	8.8	2680	2470	80	709	/	36.85
	011169	LT245/75R16 LRE	120/116S		6.5-7.0-8.0	14	30.5	9.8	3042	2778	80	682	/	41.30
	011176	LT265/75R16 LRE	123/120S		7.0-7.5-8.0	15	31.7	10.5	3415	3085	80	656	/	46.27
	825087	215/70R16	100H		5.5-6.5-7.0	11	27.9	8.7	1763.66843	/	44	745	500/A/A	27.84
	825094	225/70R16	103H		6.0-6.5-7.5	11	28.4	9.0	1929.012346	/	44	731	500/A/A	28.42
	825100	235/70R16	106H		6.0-7.0-8.0	11	29.0	9.4	2094.356261	/	44	717	500/A/A	31.14
	825117	245/70R16	107H		6.5-7.0-8.0	11	29.5	9.8	2149.470899	/	44	703	500/A/A	33.05
	825124	255/70R16	109H		6.5-7.5-8.5	11	30.1	10.2	2270.723104	/	44	690	500/A/A	27.30
	825131	265/70R16	112H		7.0-8.0-9.0	11	30.6	10.7	2469.135802	/	44	678	500/A/A	36.92
	825186	235/65R16	107H		6.5-7.0-8.5	11	28.0	9.4	2149.470899	/	49	741	500/A/A	36.37
17	011145	LT235/80R17 LRE	120/117S		6.0-6.5-7.5	14	31.8	9.3	3085	2835	80	653	/	41.14
	011183	LT245/75R17 LRE	121/118S		6.5-7.0-7.5	14	31.5	9.8	3195	2910	80	659	/	43.67
	011190	LT245/70R17 LRE	119/116S		6.5-7.0-8.0	14	30.6	9.8	3000	2755	80	680	/	41.58
	011206	LT265/70R17 LRE	121/118S		7.0-8.0-8.5	15	31.7	10.7	3195	2910	80	656	/	46.69
	825148	245/70R17	110H		6.5-7.0-8.0	11	30.6	9.8	2336.86067	/	44	680	500/A/A	35.12
	825155	255/70R17	112H		6.5-7.5-8.5	11	31.1	10.2	2469.135802	/	44	668	500/A/A	35.42
	825162	265/70R17	115H		7.0-8.0-9.0	11	31.7	10.7	2678.571429	/	44	656	500/A/A	38.06
	825193	225/65R17	102H		6.0-6.5-8.0	11	28.5	9.0	1873.897707	/	44	729	500/A/A	28.64
	825209	235/65R17	108H		6.5-7.0-8.5	11	29.1	9.4	2204.585538	/	49	715	500/A/A	30.75
	825216	245/65R17	107H		7.0-8.5	11	29.5	9.8	2149.470899	/	44	703	500/A/A	32.77
	825223	255/65R17	110H		7.0-7.5-9.0	11	30.1	10.2	2336.86067	/	44	690	500/A/A	34.14
	825230	265/65R17	112H		7.5-8.0-9.5	11	30.6	10.7	2469.135802	/	44	680	500/A/A	37.70
	825254	225/60R17	99H		6.0-6.5-8.0	11	27.6	9.0	1708.553792	/	44	751	500/A/A	25.30

Wheel Diameter	Article	Size	L/S	PLY-LOAD	Rim Width	Tread Depth	Diameter	Section Width	Max Load	Max Load (Dual)	Max Pressure	RPM	UTQG	Weight
						1/32"	inch	inch	lbs	lbs	psi			lbs
18	809544	265/65R18	116H		7.5-8.0-9.5	11	31.5	10.7	2756	/	49	659	500/A/A	38.02
	809568	275/65R18	118H		7.5-8.0-9.5	11	32.1	11.0	2910	/	49	647	500/A/A	38.23
	011216	LT265/70R18 LRE	124/121S		7.0-8.0-9.0	15	32.6	10.7	3525	3195	80	636	/	49.06
	011220	LT275/70R18 LRE	125/122S		7.0-8.0-8.5	16	33.2	11.0	3640	3305	80	626	/	50.09
	011237	LT275/65R18 LRE	123/120S		7.5-8.0-9.0	16	32.1	11.0	3415	3085	80	647	/	49.45
	825179	255/70R18	113H		6.5-7.5-8.5	11	32.1	10.2	2535.273369	/	44	647	500/A/A	38.39
	825247	235/65R18	110H		6.5-7.0-8.5	11	30.0	9.4	2336.86067	/	49	691	500/A/A	33.02
	825261	235/60R18	107V		6.5-7.0-8.5	11	29.1	9.4	2149.470899	/	49	714	500/A/A	31.62
	825278	245/60R18	105V		7.0-8.5	11	29.6	9.8	2039.241623	/	44	702	500/A/A	32.16
	825285	265/60R18	114H		7.5-8.0-9.5	11	30.5	10.7	2601.410935	/	49	681	500/A/A	37.08
	825292	235/55R18	104V		6.5-7.5-8.5	11	28.1	9.6	1984.126984	/	49	738	500/A/A	30.37
	825308	255/55R18	109V		7.0-8.0-9.0	11	29.0	10.4	2270.723104	/	49	716	500/A/A	31.48
	825315	255/55ZR18	109W		7.0-8.0-9.0	11	29.0	10.4	2270.723104	/	49	716	500/A/A	31.48
20	809513	275/55R20	117H		7.5-8.5-9.5	11	31.9	11.2	2833	/	49	651	500/A/A	39.22
	809537	275/60R20	115H		7.5-8.0-9.5	11	33.0	11.0	2679	/	44	630	500/A/A	39.75
	011244	LT275/65R20 LRE	126/123S		7.5-8.0-9.5	16	34.1	11.0	3750	3415	80	609	/	54.33
	011251	LT265/60R20 LRE	121/118S		7.5-8.0-9.5	16	32.5	10.7	3195	2910	80	639	/	48.46
	011268	LT285/60R20 LRE	125/122S		8.0-8.5-10.0	15	33.5	11.5	3640	3305	80	621	/	54.04
22	809551	285/45R22	116H		9.0-9.5-10.5	11	32.1	11.2	2756	/	49	647	500/A/A	40.28
	825322	275/45R22	114V		8.5-9.0-10.5	11	31.8	10.7	2601.410935	/	49	654	500/A/A	39.02

This data can be changed by manufacturer without prior notice.

LS588

ULTRA-HIGH PERFORMANCE ALL-SEASON



EQUIPPED FOR



V, W, and Y Speed-Rated, we designed the LS588 UHP to complement today's finest high performance automobiles.

From luxury sports cars to modern muscle cars, the LS588 UHP is built to accentuate the highest levels of performance. Multiple staggered fitments make this the UHP tire of choice.

ULTRA-HIGH PERFORMANCE HANDLING

Designed for ultra-high performance first, the long grooves and lateral grooves work together to give superior traction in cornering.

SMOOTH, QUIET RIDE

By ensuring the tread pitch width and alignment are at optimum angles, the road noise is minimized.

EXCELLENT DRY HANDLING

A large area of tread contact with the road means optimized grip and control on dry, hot surfaces.

WET-TRACTION TREAD DESIGN

Hydroplaning is reduced with the specific placement of grooves that force water away from the tire surface.

UNIQUE LS SILICA COMPOUND

Our specially formulated LS Silica Compound adds performance by increasing flexibility in low temperatures and traction on wet surfaces, giving you more control. Reduced rolling resistance results in greater fuel efficiency.



LANDSAIL EQUIPPED

Equipped with our LS Silica Compound, the LS588 UHP is a serious Ultra-High Performance tire with the highest possible speed ratings for street tires. It delivers the DNA of a true UHP without sacrificing comfort, ride quality, or reliability beyond the warranted 50K miles.

LS588

ULTRA-HIGH PERFORMANCE
ALL-SEASON



Wheel Diameter	Article	Size	L/S	Rim Width	Tread Depth	Diameter	Section Width	Max Load	Max Pressure	RPM	UTQG	Weight
					1/32"	inch	inch	lbs	psi			lbs
16	582811	205/45ZR16	87W XL	6.5-7.0-7.5	10	23.2	8.1	1201	49	894	500/A/A	17.91
	582910	215/45ZR16	86W	7.0-7.5-8.0	10	23.6	8.4	1168	44	879	500/A/A	18.08
	584617	205/55ZR16	94W XL	5.5-6.5-7.5	10	24.9	8.4	1477	49	835	500/A/A	20.19
	584716	215/55ZR16	97W XL	6.0-7.0-7.5	10	25.3	8.9	1609	49	822	500/A/A	21.37
	584815	225/55ZR16	95W	6.0-7.0-8.0	10	25.7	9.2	1521	44	807	500/A/A	23.13
	585164	215/60R16	95V	6.0-6.5-7.5	10	26.1	8.7	1521	44	794	500/A/A	22.33
17	581913	205/40ZR17	84W XL	7.0-7.5-8.0	10	23.5	8.3	1102	49	885	500/A/A	18.17
	582019	215/40ZR17	87W XL	6.5-7.0-7.5	10	23.8	8.6	1201	49	873	500/A/A	19.00
	582118	255/40ZR17	94W	8.5-9.0-10.0	10	25.0	10.2	1477	44	829	500/A/A	23.92
	583016	205/45ZR17	88W XL	6.5-7.0-7.5	10	24.3	8.1	1235	49	856	500/A/A	19.37
	583115	225/45ZR17	94W XL	7.0-7.5-8.5	10	25.0	8.9	1477	49	832	500/A/A	21.00
	583214	235/45ZR17	97W XL	7.5-8.0-9.0	10	25.4	9.3	1609	49	819	500/A/A	23.24
	583313	245/45ZR17	99W XL	7.5-8.0-9.0	10	25.7	9.6	1709	49	809	500/A/A	24.97
	583412	255/45ZR17	98W	8.0-8.5-9.5	10	26.1	10.0	1102	44	797	500/A/A	26.23
	584211	205/50ZR17	93W XL	5.5-6.5-7.5	10	25.1	8.4	1433	49	827	500/A/A	20.56
	584310	215/50ZR17	95W XL	6.0-7.0-7.5	10	25.5	8.9	1521	49	814	500/A/A	21.82
	584419	225/50ZR17	98W XL	6.0-7.0-8.0	10	25.9	9.2	1653	49	802	500/A/A	23.20
	584914	215/55ZR17	94W	6.0-7.0-7.5	10	26.3	8.9	1477	44	790	500/A/A	22.92
	585010	225/55ZR17	101W XL	6.0-7.0-8.0	10	26.8	9.2	1819	49	776	500/A/A	25.46
	805447	215/45R17	91W	7.0-7.5-8.0	10	24.6	8.4	1356	49	843	500/A/A	19.99
18	580916	255/35ZR18	94W XL	8.5-9.0-10.0	10	25.0	10.2	1477	49	831	500/A/A	23.65
	581012	265/35ZR18	97W XL	9.0-9.5-10.5	10	25.3	10.7	1609	49	820	500/A/A	26.50
	582217	225/40ZR18	92W XL	7.5-8.0-9.0	10	25.1	9.1	1389	49	828	500/A/A	21.08
	582316	235/40ZR18	95W XL	8.0-8.5-9.5	10	25.4	9.5	1521	49	818	500/A/A	22.78
	582415	245/40ZR18	97W XL	8.0-8.5-9.5	10	25.7	9.8	1609	49	808	500/A/A	24.36
	582514	255/40ZR18	99W XL	8.5-9.0-10.0	10	26.0	10.2	1709	49	798	500/A/A	26.37
	583511	215/45ZR18	89W	7.0-7.5-8.0	10	25.6	8.4	1279	44	810	500/A/A	20.38
	583610	225/45ZR18	95W XL	7.0-7.5-8.5	10	25.9	8.9	1521	49	801	500/A/A	21.76
	583719	235/45ZR18	98W XL	7.5-8.0-9.0	10	26.3	9.3	1653	49	789	500/A/A	24.52
	583818	245/45ZR18	100W XL	7.5-8.0-9.0	10	26.7	9.6	1764	49	779	500/A/A	25.98
	583917	255/45ZR18	99W	8.0-8.5-9.5	10	27.0	10.0	1709	44	768	500/A/A	26.87
	584518	245/50ZR18	100W	7.0-7.5-8.5	10	27.7	10.0	1764	44	750	500/A/A	26.70
	805454	215/35R18	84W XL	7.0-7.5-8.5	10	23.9	8.6	1102	49	869	500/A/A	18.66
	805461	215/40R18	89W XL	7.0-7.5-8.5	10	24.8	8.6	1279	49	839	500/A/A	20.05

Wheel Diameter	Article	Size	L/S	Rim Width	Tread Depth	Diameter	Section Width	Max Load	Max Pressure	RPM	UTQG	Weight
					1/32"	inch	inch	lbs	psi			lbs
19	580367	255/30ZR19	91Y XL	8.5-9.0-9.5	10	25.1	10.2	1356	49	828	500/A/A	23.52
	581111	215/35ZR19	85W XL	7.0-7.5-8.5	10	24.9	8.6	1135	49	833	500/A/A	20.15
	581210	225/35ZR19	88W XL	7.5-8.0-9.0	10	25.2	9.1	1235	49	823	500/A/A	21.56
	581319	255/35ZR19	96W XL	8.5-9.0-10.0	10	26.0	10.2	1565	49	798	500/A/A	25.42
	582613	245/40ZR19	98W XL	8.0-8.5-9.5	10	26.7	9.8	1653	49	777	500/A/A	25.11
	582712	255/40ZR19	100W XL	8.5-9.0-10.0	10	27.0	10.2	1764	49	768	500/A/A	27.76
	584013	245/45ZR19	102Y XL	7.5-8.0-9.0	10	27.7	9.6	1874	49	750	500/A/A	25.88
	584112	285/45ZR19	107W	9.0-9.5-10.5	10	29.1	11.2	2149	44	714	500/A/A	32.61
	585218	275/40R19	101Y	9.0-9.5-11.0	10	27.7	10.9	1819	44	750	500/A/A	30.10
	585812	235/35R19	91W XL	8.0-8.5-9.5	10	25.5	9.5	1356	49	815	500/A/A	22.07
	585911	245/35R19	97W XL	8.0-8.5-9.0	10	25.8	9.8	1609	49	805	500/A/A	23.33
	586666	235/40ZR19	98 Y XL	8.0-8.5-9.5	10	26.4	9.5	1653	49	786	500/A/A	24.36
	804235	245/40R19	96W XL	8.0-8.5-9.5	10	25.8	9.8	1609	49	805	500/A/A	23.81
	805065	225/45R19	96W XL	7.0-7.5-8.5	10	27.0	8.9	1565	49	770	500/A/A	24.14
	805140	265/30R19	93W XL	9.0-9.5-10.0	10	25.3	10.7	1433	49	820	500/A/A	23.37
	805164	265/35R19	99Y XL	9.0-9.5-10.5	10	26.3	10.7	1709	49	789	500/A/A	28.59
	805188	275/30R19	96W XL	9.0-9.5-10.0	10	25.6	10.9	1565	49	813	500/A/A	26.04
	805195	275/35R19	100W XL	9.0-9.5-11.0	10	26.6	10.9	1764	49	782	500/A/A	27.38
	805201	285/35R19	101Y XL	9.5-10.0-11.0	10	26.9	11.4	1819	49	772	500/A/A	30.13
20	530119	255/50R20	109W	7.0-8.0-9.0	10	30.1	10.4	2271	49	690	500/A/A	34.76
	580114	285/25ZR20	93W XL	10.5	10	25.6	11.6	1433	49	812	500/A/A	27.65
	580411	245/30ZR20	97W XL	8.0-8.5-9.0	10	25.8	9.8	1609	49	804	500/A/A	24.16
	580510	275/30ZR20	97W XL	9.0-9.5-10.0	10	26.5	10.9	1609	49	783	500/A/A	27.74
	581418	225/35ZR20	90W XL	7.5-8.0-9.0	10	26.2	9.1	1102	49	792	500/A/A	22.74
	581517	235/35ZR20	92W XL	7.5-8.5-9.5	10	26.5	9.5	1389	49	785	500/A/A	23.68
	581616	245/35ZR20	95W XL	8.0-8.5-9.5	10	26.8	9.8	1235	49	776	500/A/A	24.74
	581715	255/35ZR20	97W XL	8.5-9.0-10.0	10	27.0	10.2	1609	49	769	500/A/A	25.67
	581814	275/35ZR20	102W XL	9.0-9.5-11.0	10	27.6	10.9	1874	49	754	500/A/A	29.28
	585560	265/35R20	99Y	9.0-9.5-10.5	10	27.3	10.7	1709	49	760	500/A/A	29.19
	585768	295/30R20	101Y	10.0-10.5-11.0	10	27.0	11.9	1819	49	769	500/A/A	30.29
	805096	245/40R20	99W	8.0-8.5-9.5	10	27.7	9.8	1709	49	749	500/A/A	25.84
	819604	295/30ZR20	105Y XL	10.0-10.5-11.0	10	27.0	11.9	2039	49	769	500/A/A	30.29
22	580213	285/25ZR22	99W XL	10.5	10	27.6	11.6	1709	49	753	500/A/A	30.49
	580619	225/30ZR22	89W XL	8.0	10	27.1	9.5	1279	49	767	500/A/A	25.11
	580718	235/30ZR22	90W XL	8.5	10	27.6	9.5	1323	49	753	500/A/A	24.87
	580817	245/30ZR22	95W XL	8.0-8.5-9.0	10	27.8	9.8	1521	49	746	500/A/A	25.93
	805102	255/30R22	95Y	8.5-9.0-9.5	10	28.1	10.2	1521	49	740	500/A/A	27.65
	805157	265/30R22	97W XL	9.0-9.5-10.0	10	28.3	10.7	1609	49	734	500/A/A	28.88
	805225	295/25R22	100Y	10.0-10.5-11.0	10	27.8	11.9	1764	49	746	500/A/A	31.79

This data can be changed by manufacturer without prior notice.

LS588

HIGH PERFORMANCE ALL-SEASON

SUV/CUV



EQUIPPED FOR



H, V, W, and Y Speed-Rated,
this All-Season Performance
tire for SUVs and CUVs is
designed for performance and
efficiency. Our LS formulated
silica compound adds wet
performance and saves fuel.

HIGH-PERFORMANCE HANDLING

Designed for high performance, the long grooves and lateral grooves work together to deliver traction in cornering.

COMFORT AND QUALITY

We achieve a comfortable ride by ensuring that the tread pitch width and alignment are at optimum angles, minimizing road noise.

DEPENDABLE DRY HANDLING

A large area of tread contact with the road means optimized grip and control on hot road surfaces.

UNIQUE LS SILICA COMPOUND

Our specially formulated LS Silica Compound adds performance by increasing flexibility in low temperatures and traction on wet surfaces, giving you more control. Reduced rolling resistance results in greater fuel efficiency.



LANDSAIL EQUIPPED

Equipped to perform with our LS Silica Compound, the LS588 SUV/ CUV is a High-Performance tire with the highest possible speed ratings for street tires. The LS588 is performance-ready without sacrificing comfort, ride quality, or reliability beyond the warrantied 50K miles.

SUV/CUV

LS588

HIGH PERFORMANCE
ALL-SEASON

Wheel Diameter	Article	Size	L/S	Rim Width	Tread Depth	Diameter	Section Width	Max Load	Max Pressure	RPM	UTQG	Weight
					1/32"	inch	inch	lbs	psi			lbs
16	533523	255/65R16	109H	7.0-7.5-9.0	10	29.1	10.2	2271	44	715	500/A/A	31.59
17	530423	265/65R17	112H	7.5-8.0-9.5	10	30.6	10.7	2469	44	680	500/A/A	35.11
	530522	215/60R17	96H	6.0-6.5-7.5	10	27.2	8.7	1565	44	765	500/A/A	24.81
	531420	225/65R17	102H	6.0-6.5-8.0	10	28.5	9.0	1874	44	729	500/A/A	28.01
18	530614	225/55ZR18	102W XL	6.0-7.0-8.0	10	27.8	9.2	1874	49	748	500/A/A	26.32
	530751	235/55R18	104V	6.5-7.5-8.5	10	28.1	9.6	1984	49	738	500/A/A	27.80
	531055	265/60R18	110V	7.5-8.0-9.5	10	30.5	10.7	2337	44	681	500/A/A	34.77
	531659	235/60R18	107V XL	6.5-7.0-8.5	10	29.1	9.4	2149	49	714	500/A/A	30.46
	533158	285/60R18	120V XL	8.0-8.5-10.0	10	31.5	11.5	3086	49	660	500/A/A	36.08
	533622	255/60R18	112H XL	7.0-7.5-9.0	10	30.0	10.2	2469	49	691	500/A/A	33.69
	534711	255/55R18	109W XL	7.0-8.0-9.0	10	30.1	10.4	2271	49	690	500/A/A	32.23
19	530218	255/50ZR19	103W	7.0-8.0-9.0	10	29.1	10.4	1929	44	714	500/A/A	31.41
	532113	235/55ZR19	105W XL	6.5-7.5-8.5	10	29.2	9.6	2039	49	712	500/A/A	29.56
	532250	255/55R19	111V XL	7.0-8.0-9.0	10	30.0	10.4	2403	49	691	500/A/A	33.32
	532755	275/55R19	111V	7.5-8.5-9.5	10	30.9	11.2	2403	44	672	500/A/A	39.22
	533219	245/55R19	103W	7.0-7.5-8.5	10	29.6	10.0	1929	44	701	500/A/A	30.68
	533752	265/50R19	110Y XL	7.5-8.5-9.5	10	29.5	10.9	2337	49	704	500/A/A	35.32
20	530157	255/50ZR20	109Y XL	7.0-8.0-9.0	10	30.1	10.4	2271	49	690	500/A/A	34.12
	531154	275/45R20	110V XL	8.5-9.0-10.5	10	29.8	10.7	2337	49	698	500/A/A	38.68
	531215	275/55ZR20	117W	7.5-8.5-9.5	10	31.9	11.2	2833	49	651	500/A/A	39.75
	531352	275/60R20	115V	7.5-8.0-9.5	10	33.0	11.0	2679	44	630	500/A/A	34.35
	531512	315/35ZR20	110W	10.5-11.0-12.5	10	28.7	12.6	2337	49	725	500/A/A	37.59
	532311	245/45ZR20	103W XL	7.5-8.0-9.0	10	28.7	9.6	1929	49	725	500/A/A	28.31
	532410	255/45ZR20	105W XL	8.0-8.5-9.5	10	29.1	10.0	2039	49	715	500/A/A	30.05
	532519	265/50ZR20	111W XL	7.5-8.5-9.5	10	30.5	10.9	2403	49	682	500/A/A	36.05
	532618	275/40ZR20	106W XL	9.0-9.5-11.0	10	28.7	10.9	2094	49	725	500/A/A	34.64
	532915	245/50ZR20	102W	7.0-7.5-8.5	10	29.7	10.0	1874	44	700	500/A/A	30.79
	534117	265/45R20	104W	8.5-9.0-10.0	10	29.4	10.5	1984	44	707	500/A/A	32.41
	535855	255/55R20	110V XL	7.0-8.0-9.0	10	31.0	10.4	2337	49	669	500/A/A	34.76
	805072	235/55R20	104W XL	6.5-7.5-8.5	10	30.2	9.6	1984	49	689	500/A/A	31.73
21	805232	295/40R20	108Y	10.0-10.5-11.5	10	29.3	11.9	2205	49	709	500/A/A	41.66
	534551	295/35R21	107V XL	10.0-10.5-11.5	10	29.1	11.9	2149	49	714	500/A/A	39.78
	535756	285/35R21	105V XL	9.5-10.0-11.0	10	28.9	11.4	2039	49	720	500/A/A	34.74
	805171	265/40R21	105Y XL	9.0-9.5-10.0	10	29.3	10.7	2039	49	708	500/A/A	34.36
	809506	325/30R21	110Y XL	11.0-11.5-12.0	10	28.7	13.0	2337	49	724	500/A/A	37.59

Wheel Diameter	Article	Size	L/S	Rim Width	Tread Depth	Diameter	Section Width	Max Load	Max Pressure	RPM	UTQG	Weight
					1/32"	inch	inch	lbs	psi			lbs
22	530812	265/40ZR22	106W XL	9.0-9.5-10.5	10	30.4	10.7	2094	49	684	500/A/A	35.60
	531710	265/35ZR22	102W XL	9.0-9.5-10.5	10	29.3	10.7	1874	49	708	500/A/A	31.75
	531956	305/40R22	114V XL	10.0-11.0-12.0	10	31.6	12.3	2601	49	657	500/A/A	43.64
	532052	305/45R22	118V XL	9.5-10.0-11.5	10	32.8	11.9	2910	49	633	500/A/A	37.26
	532816	285/35ZR22	106W XL	9.5-10.0-11.0	10	29.9	11.4	2094	49	695	500/A/A	37.61
	533059	285/45R22	114V XL	9.0-9.5-10.5	10	32.1	11.2	2601	49	647	500/A/A	39.66
	534254	275/45R22	112V	8.5-9.0-10.5	10	31.8	10.7	2469	49	654	500/A/A	36.33
	534957	285/40ZR22	110V XL	9.5-10.0-11.0	10	31.0	11.4	2337	49	670	500/A/A	40.28
24	535152	265/45R22	109V	8.5-9.0-10.0	10	31.4	10.3	2271	50	661	500/A/A	37.15
	533851	295/35R24	110V XL	10.0-10.5-11.5	10	32.1	11.9	2337	49	646	500/A/A	37.29
	533950	305/35R24	112V XL	10.0-11.0-12.0	10	32.4	12.3	2469	49	640	500/A/A	39.72
	534018	245/30R24	94W XL	8.0-8.5-9.0	10	28.8	9.8	1477	49	721	500/A/A	29.78
	534315	295/25ZR24	109W XL	10.0-10.5-11.0	10	29.6	11.6	2271	49	702	500/A/A	34.72
	534414	295/30R24	109W XL	10.0-10.5-11.0	10	30.7	12.2	2271	49	676	500/A/A	36.76
	805119	255/30R24	97W	8.5-9.0-9.5	10	30.1	10.2	1609	49	690	500/A/A	32.16
	823236	285/40R24	118V XL	9.5-10.0-11.0	10	33.0	11.4	2910	49	630	500/A/A	40.75
26	533318	275/25ZR26	98W XL	10.0	11	31.5	11.1	1653	49	660	500/A/A	31.82
	533417	305/30ZR26	109W XL	10.5-11.0-11.5	11	33.2	12.3	2271	49	625	500/A/A	40.42
	535015	295/30R26	107W XL	10.0-10.5-11.0	11	33.0	11.9	2149	49	630	500/A/A	40.85
	805126	255/30R26	99W	8.5-9.0-9.5	10	31.8	10.6	1709	49	654	500/A/A	36.08

This data can be changed by manufacturer without prior notice.

LS388

PERFORMANCE

TOURING



EQUIPPED FOR



The LS388 is a smart performance Touring tire designed for miles of comfort, long-wear, and fuel efficiency, with a 50K Mileage Warranty.

FUEL-SAVING TREAD COMPOUND

Smart and efficient, your vehicle will use less fuel. We purposefully formulated the rubber compound of the LS388 to be fuel-efficient by reducing rolling resistance.

WET-GRIP GROOVE DESIGN

The four wide long grooves and precisely placed lateral grooves work together to channel water and direct it out and away from the tire.

SOLID CENTER RIB FOR STABILITY

The center rib is solid to increase stability in straight-line driving at higher speeds.

LOW-WEAR SHOULDER

This tire shoulder is fully equipped with heat-resisting areas that keep the tread blocks stable, protecting them from irregular wear. This engineering also increases stability when cornering.

QUIET-RIDE PITCH ALIGNMENT

We designed the tread pitch width and alignment at optimum angles to suppress road noise.



LANDSAIL EQUIPPED

With fuel economy in mind, we formulated a smart and efficient compound to make a difference in your vehicle's ability to use less fuel. We warranted it with 50K miles of reliability, so your dollars go the distance. Landsail delivers quality through technology.

LS388

PERFORMANCE TOURING



Wheel Diameter	Article	Size	L/S	Rim Width	Tread Depth	Diameter	Section Width	Max Load	Max Pressure	RPM	UTQG	Weight
					1/32"	inch	inch	lbs	psi			lbs
13	130531	165/70R13	79T	4.0-5.0-5.5	9	22.1	6.7	963	44	939	500/A/A	13.78
	130722	165/70R13	79T	4.0-5.0-5.5	9	22.1	6.7	963	44	939	500/A/A	13.78
	131026	175/70R13	82H	4.5-5.0-6.0	9	22.7	7.0	1047	44	916	500/A/A	15.21
	131132	175/70R13	82T	4.5-5.0-6.0	9	22.7	7.0	1047	44	916	500/A/A	15.21
	131323	165/65R13	77H	4.5-5.0-6.0	9	21.4	6.7	908	44	970	500/A/A	14.02
	131439	165/65R13	77T	4.5-5.0-6.0	9	21.4	6.7	908	44	970	500/A/A	14.02
14	130135	175/70R14	88T	4.5-5.0-6.0	9	23.7	7.0	1235	49	876	500/A/A	15.86
	130838	165/70R14	81T	4.0-5.0-5.5	9	23.1	6.7	1019	44	897	500/A/A	14.64
	130920	165/70R14	81H	4.0-5.0-5.5	9	23.1	6.7	1019	44	897	500/A/A	14.64
	131224	175/70R14	88H	4.5-5.0-6.0	9	23.7	7.0	1235	49	876	500/A/A	15.86
	131521	165/65R14	79H	4.5-5.0-6.0	9	22.4	6.7	963	44	926	500/A/A	14.12
	131637	165/65R14	79T	4.5-5.0-6.0	9	22.4	6.7	963	44	926	500/A/A	14.12
	131729	175/65R14	82H	5.0-5.5-6.0	10	23.0	7.0	1047	44	903	500/A/A	15.00
	131835	175/65R14	82T	5.0-5.5-6.0	10	23.0	7.0	1047	44	903	500/A/A	15.00
	132139	185/65R14	86T	5.0-5.5-6.5	10	23.5	7.4	1168	44	885	500/A/A	16.02
	132221	185/65R14	86H	5.0-5.5-6.5	10	23.5	7.4	1168	44	885	500/A/A	16.02
	132931	165/60R14	75T	4.5-5.0-6.0	10	21.8	6.7	853	44	952	500/A/A	13.84
	133020	185/60R14	82H	5.0-5.5-6.5	10	22.8	7.4	1047	44	913	500/A/A	15.79
	133228	195/60R14	86H	5.5-6.0-7.0	10	23.2	7.9	1168	44	894	500/A/A	16.09
	136021	165/60R14	75H	4.5-5.0-6.0	10	21.8	6.7	853	44	952	500/A/A	13.84
	805423	195/70R14	91T	5.0-6.0-6.5	10	24.8	7.9	1356	44	837	500/A/A	18.77
	805430	205/70R14	98H	5.0-6.0-7.0	10	25.4	8.2	1653	49	819	500/A/A	20.88
15	130258	195/60R15	88V	5.5-6.0-7.0	10	24.2	7.9	1235	44	858	500/A/A	18.25
	130425	215/70R15	98H	5.5-6.5-7.0	10	26.9	8.7	1653	44	772	500/A/A	23.19
	130654	195/55R15	85V	5.5-6.0-7.0	10	23.4	7.9	1135	44	887	500/A/A	17.99
	131934	175/65R15	84T	5.0-5.5-6.0	9	24.0	7.0	1102	44	866	500/A/A	16.54
	132023	175/65R15	84H	5.0-5.5-6.0	9	24.0	7.0	1102	44	866	500/A/A	16.54
	132337	185/65R15	88T	5.0-5.5-6.5	10	24.4	7.4	1235	44	850	500/A/A	17.64
	132429	185/65R15	88H	5.0-5.5-6.5	10	24.4	7.4	1235	44	850	500/A/A	17.64
	132528	195/65R15	91H	5.5-6.0-7.0	10	25.0	7.9	1356	44	831	500/A/A	19.03
	132627	205/65R15	94H	5.5-6.0-7.5	10	25.5	8.2	1477	44	815	500/A/A	20.83
	133129	185/60R15	84H	5.0-5.5-6.5	10	23.7	7.4	1102	44	875	500/A/A	17.10
	133327	195/60R15	88H	5.5-6.0-7.0	10	24.2	7.9	1235	44	858	500/A/A	18.25
	133457	205/60R15	91V	5.5-6.0-7.5	10	24.7	8.2	1356	44	841	500/A/A	19.75
	135055	195/50R15	82V	5.5-6.0-7.0	10	22.7	7.9	1047	44	914	500/A/A	17.28
	136151	195/65R15	91V	5.5-6.0-7.0	10	25.0	7.9	1356	44	831	500/A/A	19.03
	136229	175/60R15	81H	5.0-5.5-6.0	10	23.3	7.0	1019	44	893	500/A/A	16.05
	137752	195/45R15	78V	6.0-6.5-7.5	10	21.9	7.7	937	44	947	500/A/A	16.85

Wheel Diameter	Article	Size	L/S	Rim Width	Tread Depth	Diameter	Section Width	Max Load	Max Pressure	RPM	UTQG	Weight
					1/32"	inch	inch	lbs	psi			lbs
16	130319	205/55R16	94W	5.5-6.5-7.5	10	24.9	8.4	1477	49	835	500/A/A	20.19
	132757	205/65R16	95V	5.5-6.0-7.5	10	26.5	8.2	1521	44	785	500/A/A	21.45
	132825	215/65R16	98H	6.0-6.5-7.5	10	27.0	8.7	1653	44	769	500/A/A	23.25
	133525	205/60R16	92H	5.5-6.0-7.5	10	25.7	8.2	1389	44	809	500/A/A	20.06
	133655	205/60R16	92V	5.5-6.0-7.5	10	25.7	8.2	1389	44	809	500/A/A	20.06
	133723	215/60R16	95H	6.0-6.5-7.5	10	26.1	8.7	1521	44	794	500/A/A	22.33
	133853	215/60R16	95V	6.0-6.5-7.5	10	26.1	8.7	1521	44	794	500/A/A	22.33
	134027	225/60R16	98H	6.0-6.5-8.0	10	26.6	9.0	1653	44	780	500/A/A	23.73
	134218	195/55R16	91W	5.5-6.0-7.0	10	24.4	7.9	1356	49	851	500/A/A	19.04
	134317	205/55R16	91W	5.5-6.5-7.5	10	24.9	8.4	1356	44	835	500/A/A	20.19
	134416	215/55ZR16	97W XL	6.0-7.0-7.5	10	25.3	8.9	1609	49	822	500/A/A	21.37
	134614	225/55ZR16	99W XL	6.0-7.0-8.0	10	25.7	9.2	1709	49	807	500/A/A	23.13
	135123	195/50R16	84H	5.5-6.0-7.0	10	23.7	7.9	1102	44	876	500/A/A	18.50
	135253	195/50R16	84V	5.5-6.0-7.0	10	23.7	7.9	1102	44	876	500/A/A	18.50
	135314	205/50ZR16	87W	5.5-6.5-7.5	10	24.1	8.4	1201	44	862	500/A/A	19.26
	139312	225/50R16	92W	6.0-7.0-8.0	10	24.9	9.2	1389	44	835	500/A/A	21.14
	560116	195/55R16	91W	5.5-6.0-7.0	10	24.4	7.9	1356	49	851	500/A/A	19.04
	560215	205/55R16	91W	5.5-6.5-7.5	10	24.9	8.4	1356	44	835	500/A/A	20.19
	805058	205/70R16	98H	5.0-6.0-7.0	10	27.3	8.2	1653	49	760	500/A/A	24.43
17	133914	215/60ZR17	100W XL	6.0-6.5-7.5	10	27.2	8.7	1764	49	765	500/A/A	24.81
	134515	215/55R17	98W	6.0-7.0-7.5	10	26.3	8.9	1653	49	790	500/A/A	22.92
	134713	225/55ZR17	101W	6.0-7.0-8.0	10	26.8	9.2	1819	49	776	500/A/A	25.46
	134911	235/55ZR17	103W XL	6.5-7.5-8.5	10	27.2	9.6	1929	49	765	500/A/A	26.37
	135413	215/50ZR17	95W	6.0-7.0-7.5	10	25.5	8.9	1521	49	814	500/A/A	21.82
	135512	225/50ZR17	98W	6.0-7.0-8.0	10	25.9	9.2	1653	49	802	500/A/A	23.20
	136427	215/60R17	100H XL	6.0-6.5-7.5	10	27.2	8.7	1764	49	765	500/A/A	24.81
	136557	215/60R17	100V XL	6.0-6.5-7.5	10	27.2	8.7	1764	49	765	500/A/A	24.81
	136618	225/45ZR17	94W	7.0-7.5-8.5	10	25.0	8.9	1477	49	832	500/A/A	21.00
	137813	195/40R17	81W	6.5-7.0-7.5	10	23.1	7.9	1019	49	897	500/A/A	17.85
	139510	215/45ZR17	91W XL	7.0-7.5-8.0	10	24.6	8.4	1356	49	843	500/A/A	19.99
	139817	205/45R17	88W XL	6.5-7.0-7.5	10	24.3	8.1	1235	49	856	500/A/A	19.37
	805089	235/60R17	105H	6.5-7.0-8.5	10	28.1	9.4	2039	49	739	500/A/A	28.71
18	134157	225/60R18	104V	6.0-6.5-8.0	10	28.6	9.0	1984	49	726	500/A/A	27.07
	134812	225/55ZR18	102W	6.0-7.0-8.0	10	27.8	9.2	1874	49	748	500/A/A	26.32
	135611	225/50ZR18	99W	6.0-7.0-8.0	10	26.9	9.2	1709	49	772	500/A/A	25.15
	135710	225/45ZR18	95W	7.0-7.5-8.5	10	25.9	8.9	1521	49	801	500/A/A	21.76
	135918	245/45ZR18	100W	7.5-8.0-9.0	10	26.7	9.6	1764	49	779	500/A/A	25.98
	136410	235/45ZR18	98W XL	7.5-8.0-9.0	10	26.3	9.3	1653	49	789	500/A/A	24.52
	136915	225/40ZR18	92W XL	7.5-8.0-9.0	10	25.1	9.1	1389	49	828	500/A/A	21.08
19	820044	225/55R19	99V	6.0-7.0-8.0	10	28.8	9.2	1709	44	722	500/A/A	28.17

This data can be changed by manufacturer without prior notice.



SZSE STOCK CODE : 002984



CARRICK Sales Director



WHAT'S APP



WECHAT

Qingdao Sentury Tire Co., Ltd.

Add: No.5 Tianshan 3rd Road, Daxin, Jimo, Qingdao.

Cel: +86-15166667535

PC: 266229

E-mail: carrick@senturytire.com

Web: www.senturytire.com.cn



WHAT'S APP



WECHAT



LANDSAIL