



# TIRE CATALOGUE

PCR TIRE  
TBR TIRE



## SHANDONG LINGLONG TYRE CO.,LTD.

Add:No.777, Jinlong Road, Zhaoyuan City, Shandong, China

Tel:+86- 535 -8238901 8242696

Fax:+86-535- 8229244

E-mail: linglong\_sales@linglong.cn

P.c:265406

Web:en.linglong.cn

Printed in 2024



@linglongtireglobal



@linglongtire



# THE WORLD AT YOUR REACH

## TABLE OF CONTENTS

### PCR TIRE

PASSENGER CAR TIRE	12
SPORT UTILITY VEHICLE TIRE	24
ALL SEASON TIRE	34
TRAILER TIRE	38
LIGHT TRUCK TIRE	40
WINTER TIRE	44

### TBR TIRE

LONG HAUL	53
REGIONAL	65
ON&OFF ROAD	95
OFF ROAD	108
LIGHT TRUCK	114
COACH&URBAN	131
WINTER	136



# COMPANY INTRODUCTION



Shandong Linglong Tyre Co., Ltd. is a technical tire manufacturer integrating tire design, development, manufacturing and sales. Founded in 1975, the company, with over 40-year forging ahead, has seven R&D centers, seven manufacturing bases across the world currently and over 18,000 employees, with its products widely used on passenger vehicles, commercial vehicles, and engineering machinery vehicles. It has built diversified brand system for different markets, including Linglong, LEAO, ATLAS, EVOLUXX, GREEN MAX and CROSSWIND etc. Linglong Tire had successful access to the A share market on July 6, 2016. It has been included in the three international indexes, the MSCI Index, the FTSE Russell Index and the S&P Emerging Market Indexes, winning the unanimous favor of the international capital market.

In the future, the company will fully implement its global layout and six internationalization, fully improve its core competitiveness, and strive to achieve its annual production and sales volume reaching 160 million units, sales revenue of over RMB 80 billion and production capacity among global top five tire manufacturers by 2030, becoming a technology-oriented enterprise with world-class technology, management and brand influence.



The company's products are exported to 173 countries across the world, covering Europe, Middle East, Americas, Asia Pacific, and Africa, and provides OE service for over 60 global well-known automakers, the total volume of OE tires up to 200 million units.

## Global OE Brands


### • PASSENGER VEHICLE




### • COMMERCIAL VEHICLE & ENGINEERING MACHINERY



Linglong collects global extraordinary wisdom to demonstrate intelligent Linglong with technological innovation. The company has established R&D institutions in Germany, America, Beijing, Shanghai, Jinan, Yantai and Zhaoyuan, owning national enterprise design center, national recognized testing laboratory and national industrial design center, to form global integrative R&D pattern. In order to promote its high-quality global industrial layout and increase its core brand competitiveness in global market. In June 2021, Linglong plans to change its 6+6 global layout into 7+5 global layout to build seven Chinese manufacturing bases as well as five overseas manufacturing bases. At present, the company has five Chinese manufacturing bases in Zhaoyuan, Dezhou, Liuzhou, Jingmen, Changchun and two overseas manufacturing bases in Thailand and Serbia (under construction). Meanwhile, Linglong will carry out active inspection of its new factory's location, aiming at completing the full completion of 7+5 global layout, and fully utilizing global resources and expanding its global tire market.

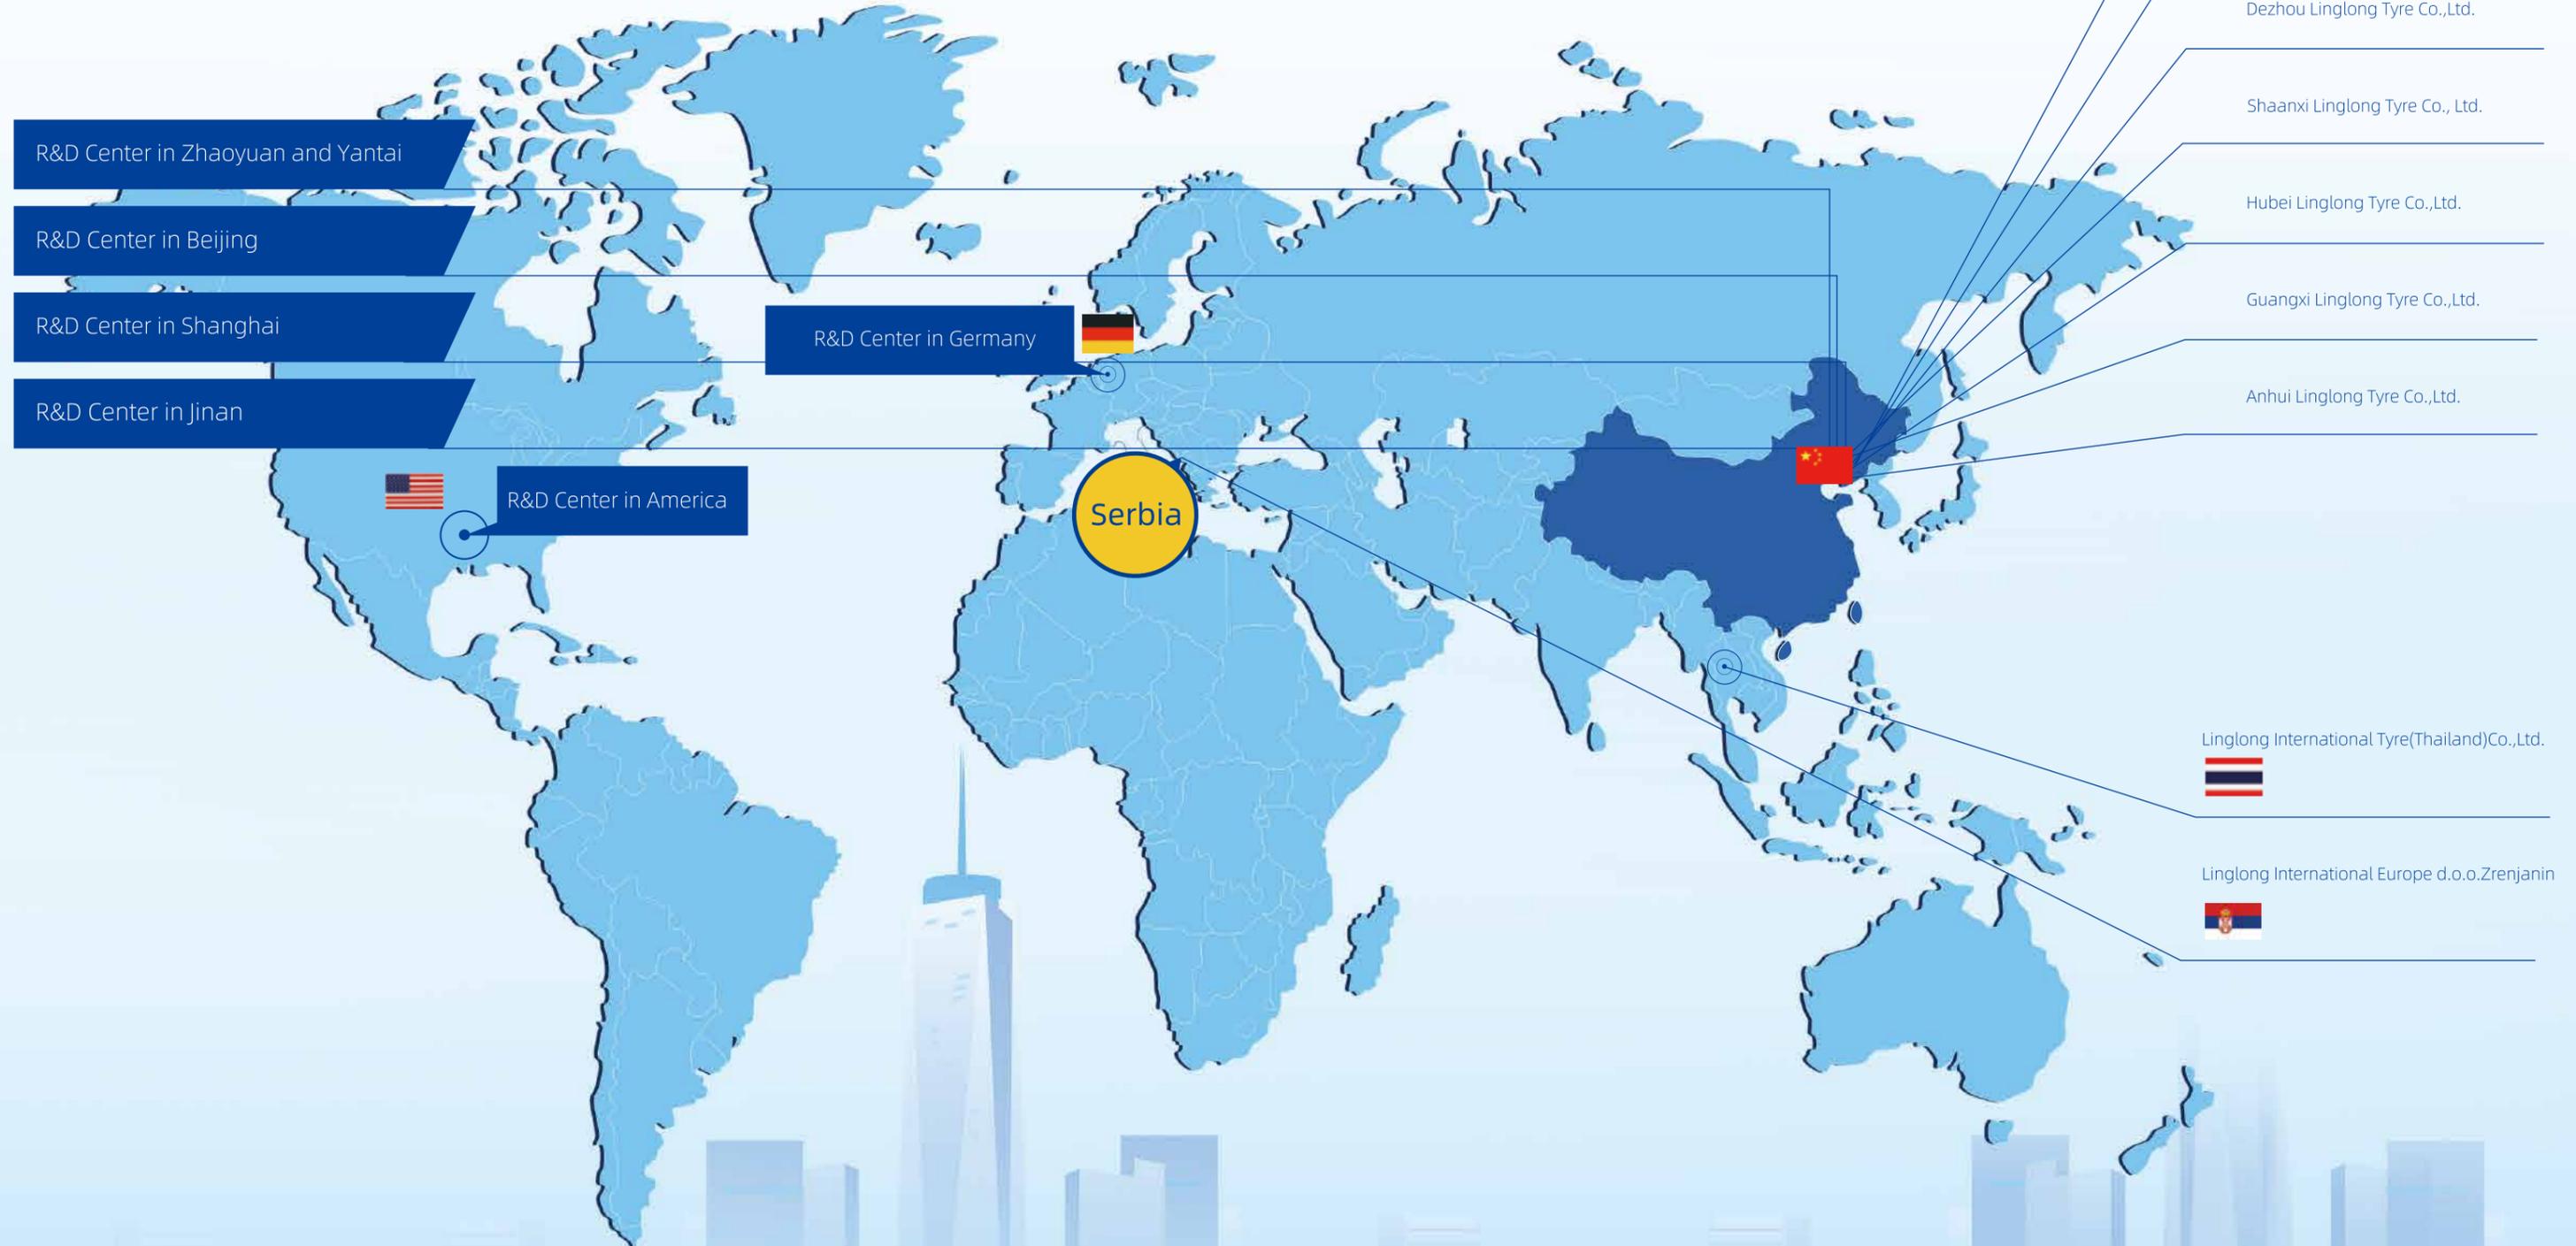

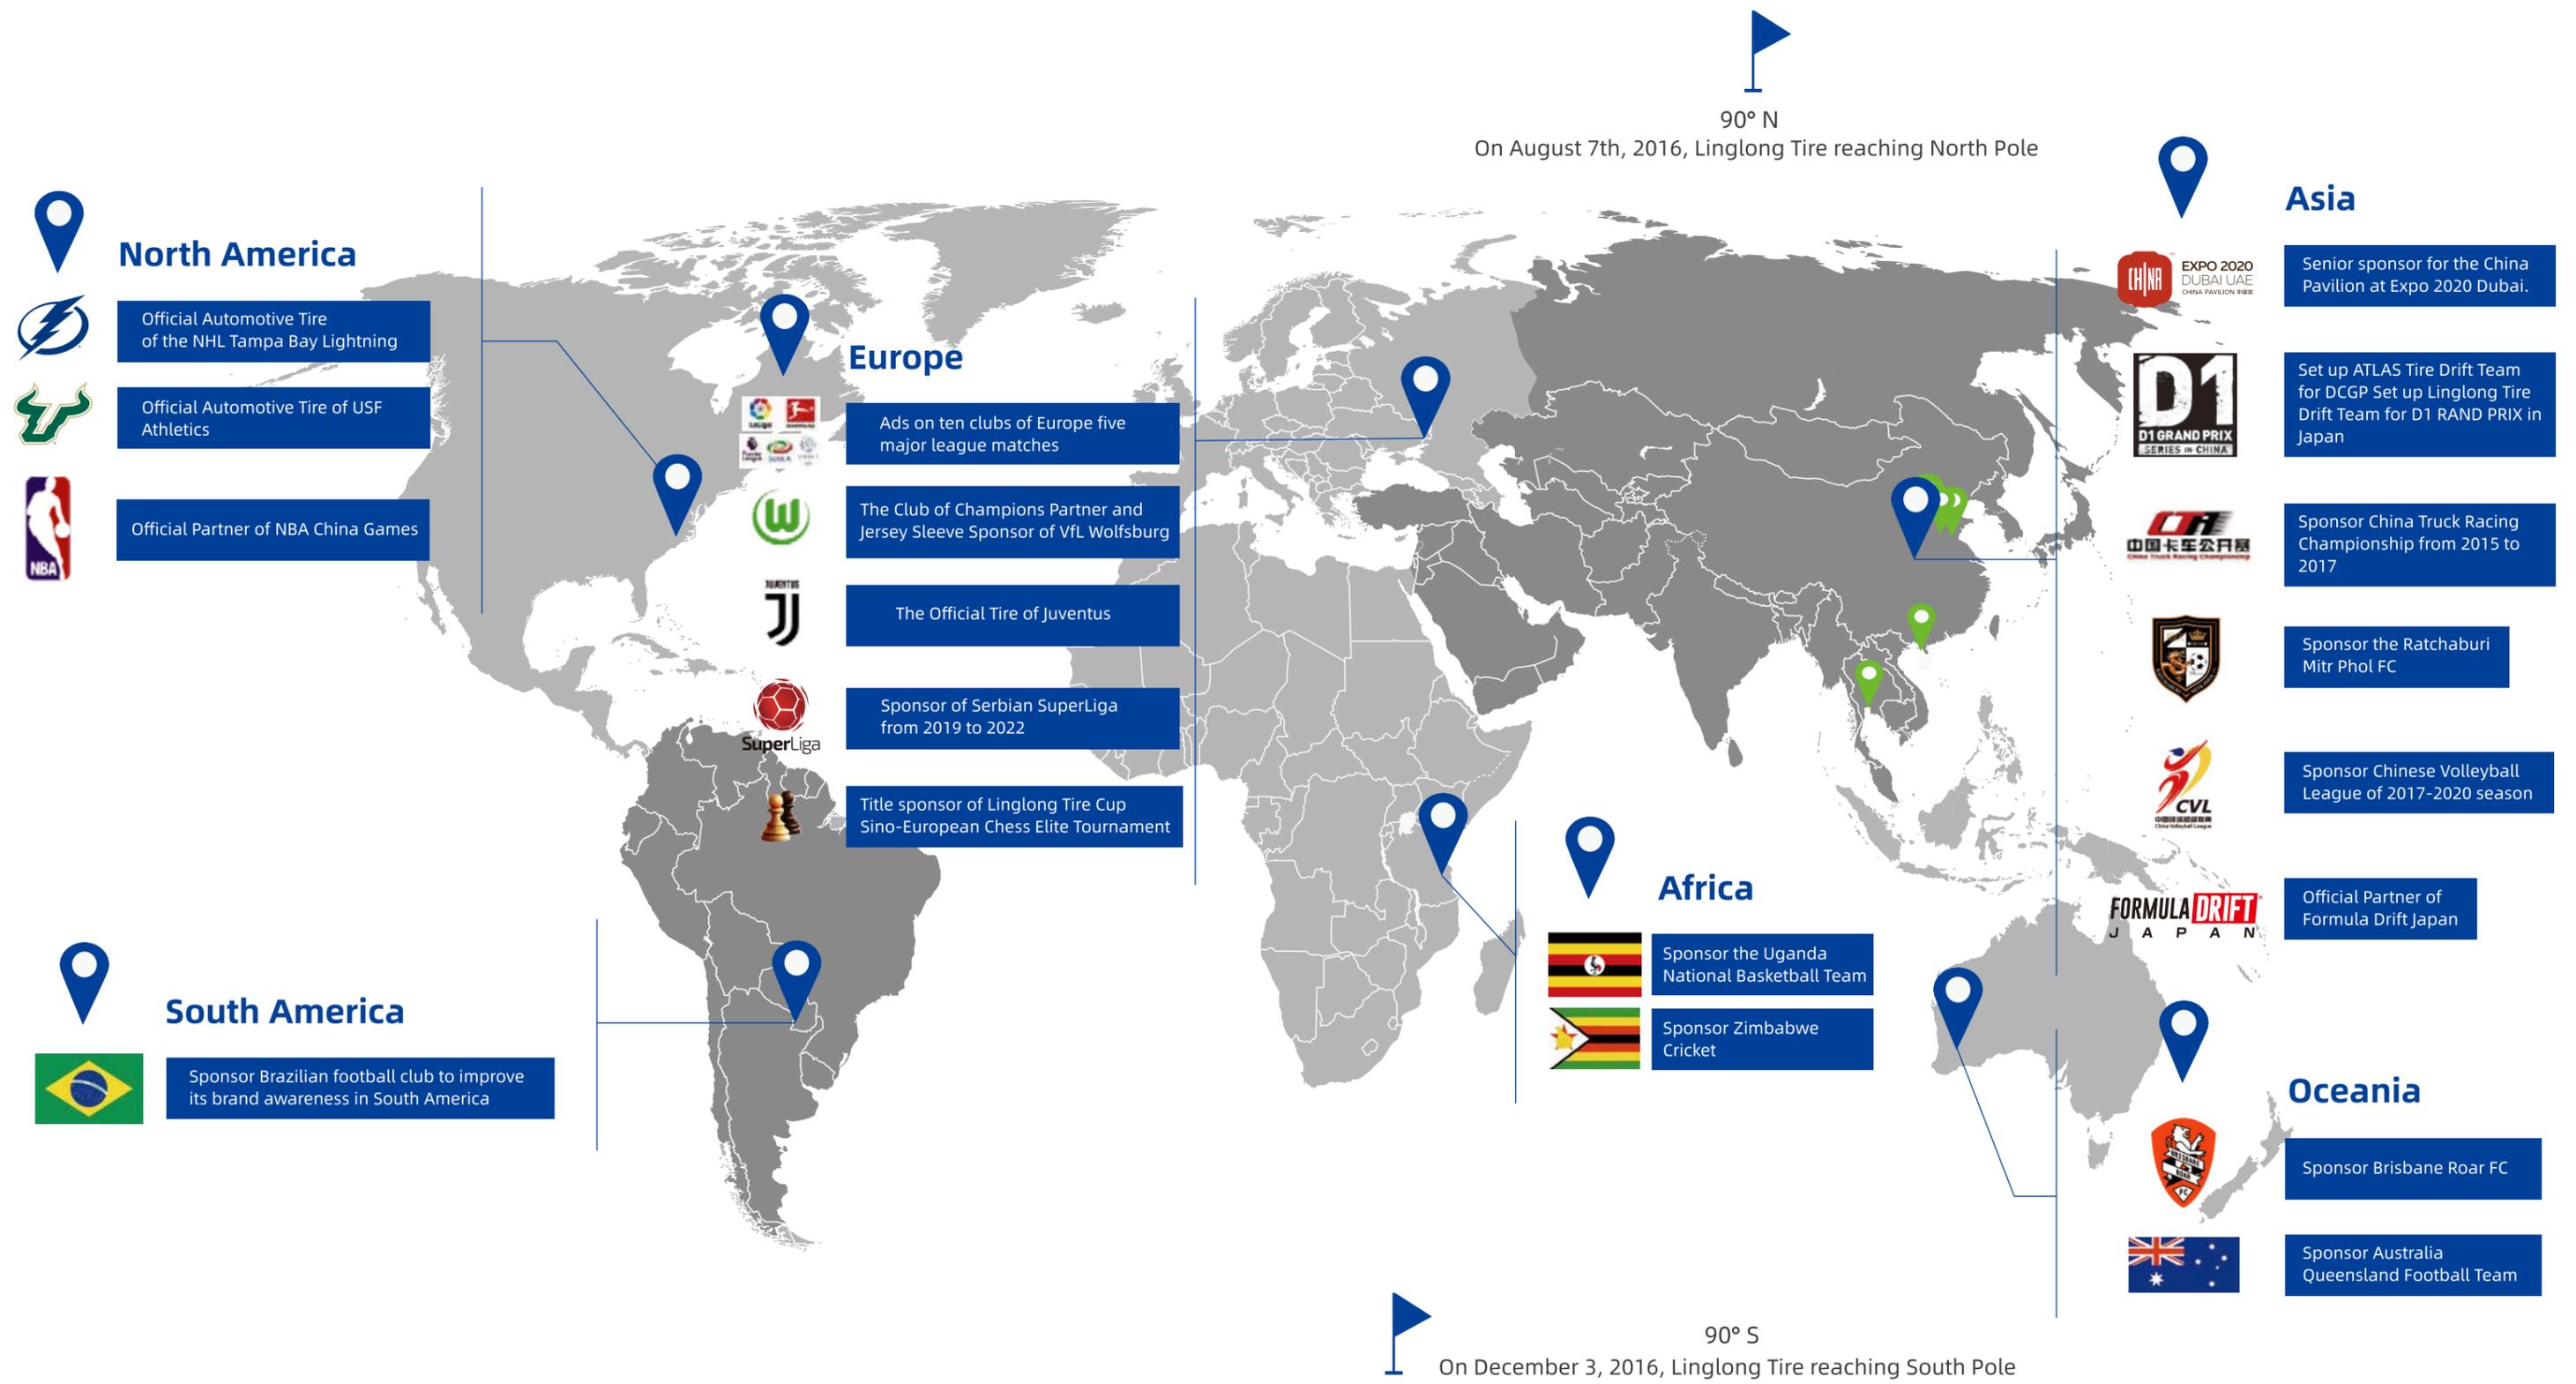

# ABUNDANT SPORTS MARKETING SPONSORSHIP



SEMA 2022



Dubai 2022



Global Club of Champions Partner of VfL Wolfsburg and Official Jersey Sleeve Partner

Linglong has sponsored over 90 sports events and teams worldwide, such as VfL Wolfsburg, to enhance its brand awareness and influence. It strengthens the retail network construction, with nearly 100,000 marketing outlets globally, promoting its brand reputation and customer loyalty through reliable product quality and excellent service. To attracting more target consumers, the company launches at airports and high-speed rail stations in major cities across the world and several CCTV programs. For many years, Linglong has been participating SEMA show and Automechanika Dubai etc. to enhance its product reputation and build the international brand image. Linglong's brand value reached 68.939 Billion RMB in 2022.



## Linglong Tire Team Orange Drift Team & ATLAS TIRES Drift Team


- **IN 2017** Atlas Tires Drift Team Was Established.
- **IN 2019** Linglong Tire Teamed Up With Team Orange To Establish The Linglong Tire Team Orange Drift Team.
- **IN 2022** Linglong Tire Team Orange Drift Team And Atlas Tires Drift Team Joined Hands To Fight In Formula Drift Japan (Fdj);

## Professional Authoritative Large Outdoor Comprehensive Tire Proving Ground

The Sino-Asia Tire Proving Ground is invested by Linglong Group, designed and constructed by a top international professional team. The total investment is nearly RMB 1.3 billion yuan. It builds 17 kinds of tire test tracks including wet handling road, wet ring, fatigue endurance road, NVH and comfort road, multi-functional platform and test mountain, off-road road, etc., covering the tire test of passenger vehicle, light trucks, heavy-duty trucks and buses, it can conduct field monitoring and indoor tests on more than 40 performance indicators such as tire handling, economy and comfort.



## PASSENGER CAR TIRE

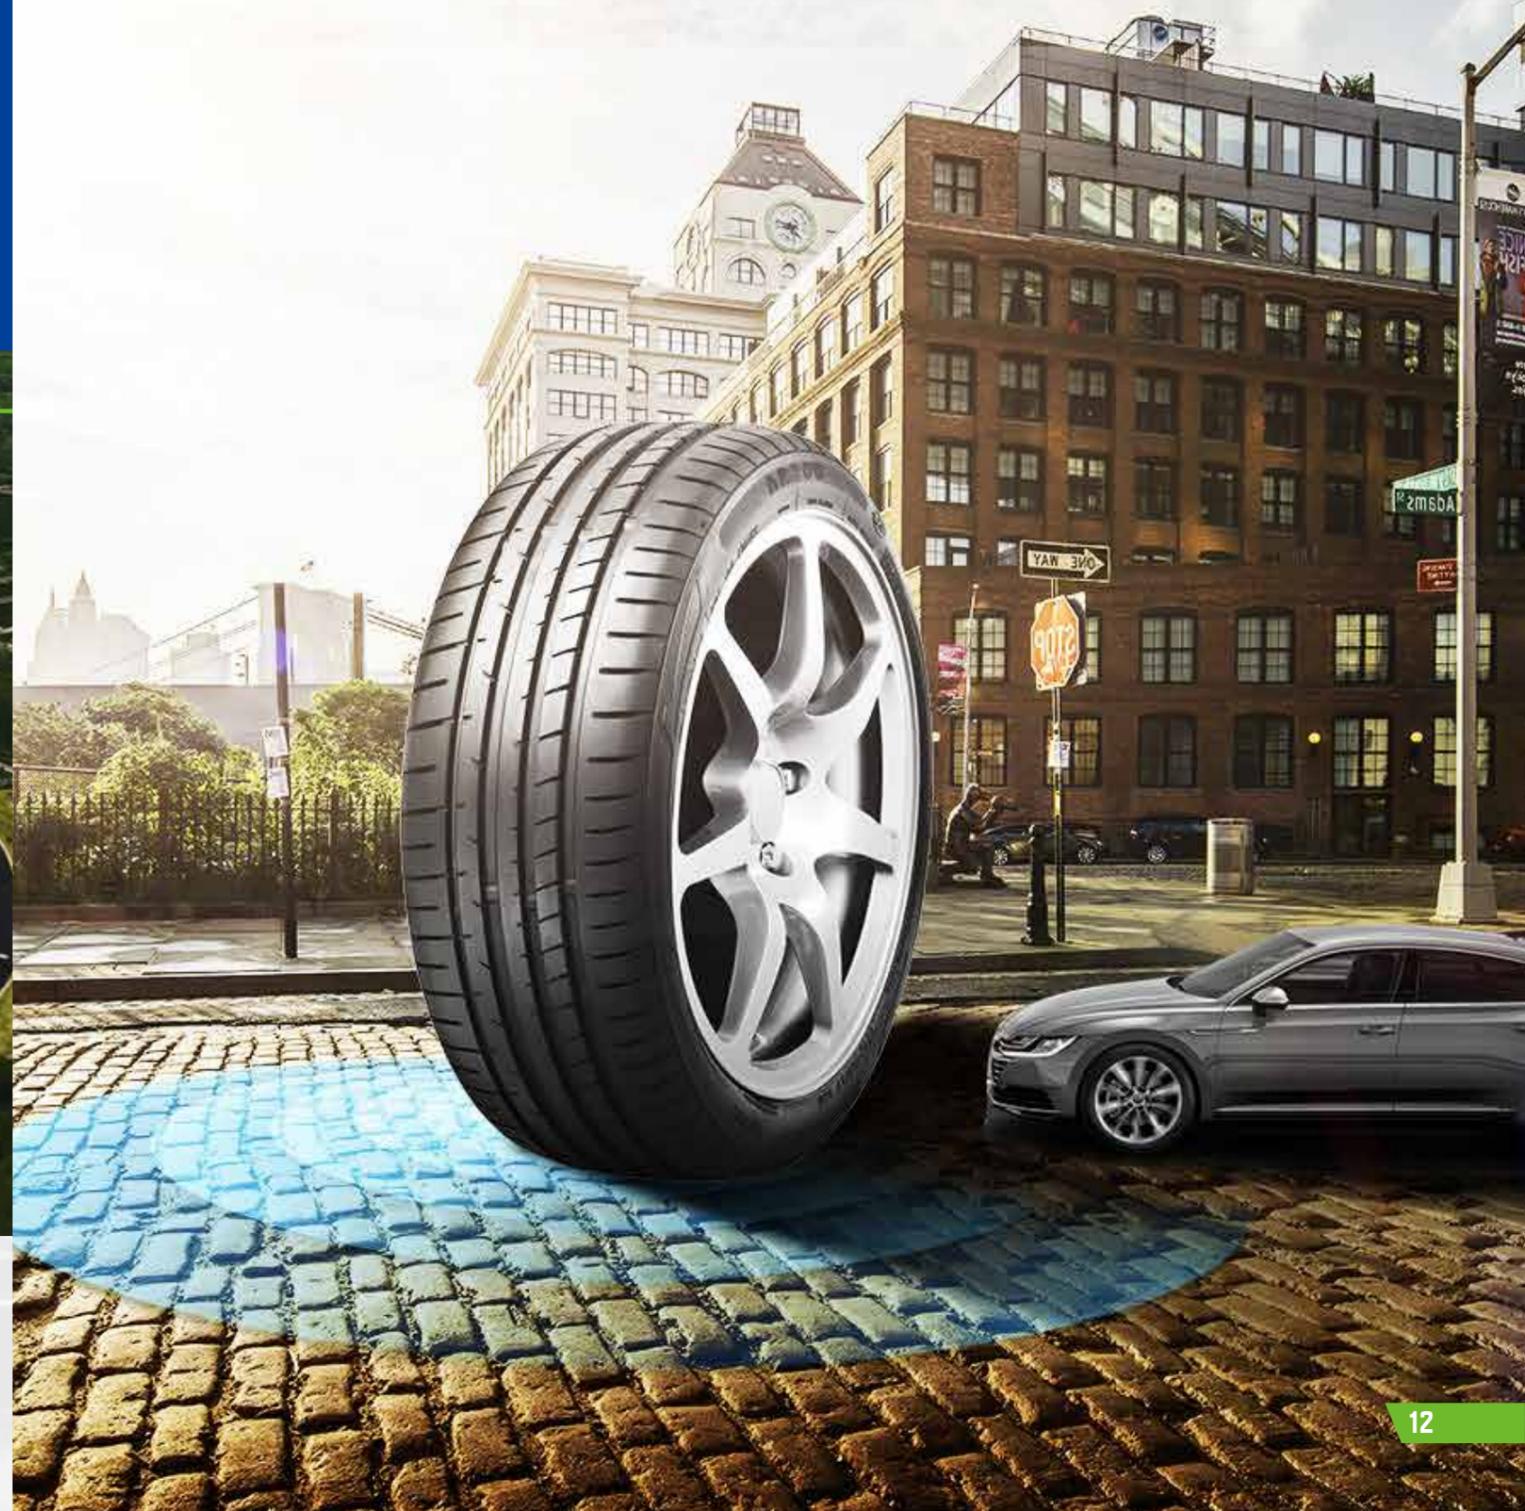



# SPORT MASTER

NEW PRODUCT

ULTRA HIGH PERFORMANCE TIRE

- Exceptional driving performance in wet and dry conditions;
- Ultra high cornering dynamics;
- Maximum safety and a quiet ride;
- Flow Break Unit Technology;
- Vanish Slimsly Groove Technology;

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (Kpa)
16	185/55R16 XL	87	V	6J	545	340
	195/45R16 XL	84	V	6 1/2J	500	340
	205/45R16 XL	87	Y	7J	545	340
	205/50R16 XL	91	Y	6 1/2J	615	340
	205/55R16	91	V	6 1/2J	615	300
	205/55R16 XL	94	Y	6 1/2J	670	340
	215/40R16 XL	86	Y	7 1/2J	530	340
	215/45R16 XL	90	Y	7J	600	340
	215/55R16 XL	97	Y	7J	730	340
225/55R16 XL	99	Y	7J	775	340	
17	195/45R17 XL	85	W	6 1/2J	515	340
	205/40R17 XL	84	Y	7 1/2J	500	340
	205/45R17 XL	88	Y	7J	560	340
	205/50R17 XL	93	Y	6 1/2J	650	340
	215/40R17 XL	87	Y	7 1/2J	545	340
	215/45R17 XL	91	Y	7J	615	340
	215/50R17 XL	95	Y	7J	690	340
	215/55R17 XL	98	Y	7J	750	340
	225/45R17 XL	94	Y	7 1/2J	670	340
	225/50R17 XL	98	Y	7J	750	340
	225/55R17 XL	101	Y	7J	825	340
	235/45R17 XL	97	Y	8J	730	340
	235/50R17 XL	100	Y	7 1/2J	800	340
	245/40R17 XL	95	Y	8 1/2J	690	340
	245/45R17 XL	99	Y	8J	775	340
18	225/40R18 XL	92	Y	8J	630	340
	225/45R18 XL	95	Y	7 1/2J	690	340
	235/40R18 XL	95	Y	8 1/2J	690	340
	235/45R18 XL	98	Y	8J	750	340
	235/50R18 XL	101	Y	7 1/2J	825	340
	245/40R18 XL	97	Y	8 1/2J	730	340
	245/45R18 XL	100	Y	8J	800	340
	255/35R18 XL	94	Y	9J	670	340
	255/45R18 XL	103	Y	8 1/2J	875	340
	265/35R18 XL	97	Y	9 1/2J	730	340
	19	225/35R19 XL	88	W	8J	560
225/35R19 XL		88	Y	8J	560	340
225/40R19 XL		93	Y	8J	650	340
225/45R19 XL		96	Y	7 1/2J	710	340
235/35R19 XL		91	Y	8 1/2J	615	340
235/40R19 XL		96	Y	8 1/2J	710	340
225/55R19 XL		103	Y	7J	875	340
235/50R19 XL		103	Y	7 1/2J	875	340
245/35R19 XL		93	Y	8 1/2J	650	340
245/40R19 XL		98	Y	8 1/2J	750	340
245/45R19 XL		102	Y	8J	850	340
255/30R19 XL		91	Y	9J	615	340
255/35R19 XL		96	Y	9J	710	340
275/40R19 XL		105	Y	9 1/2J	925	340
20	215/30R20 XL	82	W	7 1/2J	475	340
	245/35R20 XL	95	Y	8 1/2J	690	340
	245/40R20 XL	99	Y	8 1/2J	775	340
	255/35R20 XL	97	Y	9J	730	340
	265/30R20 XL	94	Y	9 1/2J	670	340
	275/35R20 XL	102	Y	9 1/2J	850	340
	315/35R20 XL	110	Y	11J	1060	340
21	245/35R21 XL	96	Y	8 1/2J	710	340
	295/35R21 XL	107	Y	10 1/2J	975	340
22	255/35R22 XL	99	Y	9J	775	340
	265/30R22 XL	97	Y	9 1/2J	730	340
	285/35R22 XL	106	Y	10J	950	340



# AR200

ULTRA HIGH PERFORMANCE TIRE

- Asymmetric tread pattern design for better handling performance and fashionable appearance;
- Big shoulder blocks design provides excellent steering performance.
- Enhanced wet grip to effectively reduce risk of hydroplaning.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (Kpa)
16	215/55R16 XL	97	W	7J	730	340
	185/55R16 XL	87	W	6J	545	340
	195/45R16 XL	84	V	6 1/2J	500	340
	205/55R16 XL	94	W	6 1/2J	670	340
	215/55R16 XL	97	W	7J	730	340
	225/55R16	95	Y	7J	690	300
17	195/45R17 XL	85	V	6 1/2J	515	340
	205/45R17 XL	88	Y	7J	560	340
	205/50R17 XL	93	Y	6 1/2J	650	340
	215/45R17 XL	91	Y	7J	615	340
	215/50R17 XL	95	Y	7J	690	340
	215/55R17	94	Y	7J	670	300
	225/45R17 XL	94	Y	7 1/2J	670	340
	225/50R17 XL	98	Y	7J	750	340
18	235/50R17 XL	100	W	7 1/2J	800	340
	255/45R17 XL	102	W	8 1/2J	850	340
	215/45R18 XL	93	W	7J	650	340
	225/40R18 XL	92	Y	8J	630	340
	225/45R18 XL	95	Y	7 1/2J	690	340
	235/45R18 XL	98	W	8J	750	340
19	245/40R18 XL	97	Y	8 1/2J	730	340
	275/45R18 XL	107	W	9J	975	340
	225/40R19 XL	93	Y	8J	650	340
	225/45R19 XL	96	W	7 1/2J	710	340
	225/55R19 XL	103	Y	7J	875	340
	235/35R19 XL	91	Y	8 1/2J	615	340
	235/40R19 XL	96	Y	8 1/2J	710	340
	235/50R19 XL	103	Y	7 1/2J	875	340
	255/30R19 XL	91	Y	9J	615	340
	255/35R19 XL	96	Y	9J	710	340
20	255/40R19 XL	100	W	9J	800	340
	255/45R19 XL	104	W	8 1/2J	900	340
	275/40R19 XL	105	Y	9 1/2J	925	340
	245/45R20 XL	103	W	8J	875	340
	255/35R20 XL	97	Y	9J	730	340
	255/45R20 XL	105	W	8 1/2J	925	340
	265/30R20 XL	94	Y	9 1/2J	670	340
21	275/35R20 XL	102	Y	9 1/2J	850	340
	315/35R20 XL	110	W	11J	1060	340
	295/35R21 XL	107	W	10 1/2J	975	340



# GREEN-Max ACRO LRS

UHP RUN-FLAT TIRE

- Asymmetric tread pattern design provides more stable driving;
- Big shoulder blocks to effectively improve handling performance;
- Linglong LRS run-flat technology for the safety of your driving.

Run-flat tire

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
17	225/45RF17	91	W	7 1/2J	615	250
	225/50RF17	94	W	7J	670	250
	225/55RF17	97	W	7J	730	250
18	245/40RF18	93	W	8 1/2J	650	250
	245/45RF18	96	W	8J	710	250
19	245/40RF19	94	W	8 1/2J	670	250
	245/45RF19	98	W	8J	750	250
	255/55RF19	107	W	8J	975	250
20	275/45RF20	106	W	9J	950	250



# COMFORT MASTER

NEW PRODUCT

HP TIRE WITH GOOD HANDLING PERFORMANCE AND LOW NOISE

- Comfortable and quiet ride;
- Low rolling resistance for better fuel efficiency;
- Enhanced wet grip to effectively reduce risk of hydroplaning.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (Kpa)
13	145/70R13	71	T	4.50B	345	300
	155/70R13	75	T	4.50B	387	300
	155/80R13	79	T	4.50B	437	300
14	155/65R14	75	T	4 1/2J	387	300
	155/65R14	75	H	4 1/2J	387	300
	165/60R14	75	H	5J	387	300
	165/65R14	79	H	5J	437	300
	165/65R14	79	T	5J	437	300
	165/70R14	81	T	5J	462	300
	165/70R14 XL	85	T	5J	515	340
	175/60R14	79	H	5J	437	300
	175/65R14	82	T	5J	475	300
	175/65R14	82	H	5J	475	300
	175/65R14 XL	86	T	5J	530	340
	175/70R14	84	T	5J	500	300
	175/70R14 XL	88	T	5J	560	340
15	145/65R15	72	T	4 1/2J	355	300
	155/60R15	74	T	4 1/2J	375	300
	165/55R15	75	V	5J	387	300
	165/60R15	77	H	5J	412	300
	165/60R15	77	T	5J	412	300
	165/65R15	81	H	5J	462	300
	165/65R15	81	T	5J	462	300
	175/55R15	77	T	5 1/2J	412	300
	175/60R15	81	H	5J	462	300
	175/60R15	81	V	5J	462	300
	175/65R15	84	H	5J	500	300
175/65R15	84	T	5J	500	300	
16	175/60R16	82	H	5J	475	300

Three Grooves

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (Kpa)	
14	185/55R14	80	H	6J	450	300	
	185/60R14	82	T	5 1/2J	475	300	
	185/60R14	82	H	5 1/2J	475	300	
	185/65R14	86	H	5 1/2J	530	300	
	185/65R14	86	T	5 1/2J	530	300	
	185/70R14	88	T	5 1/2J	560	300	
	195/60R14	86	H	6J	530	300	
	195/65R14	89	H	6J	580	300	
	195/70R14	91	T	6J	615	300	
	205/70R14	94	T	6J	670	300	
	15	185/55R15	82	V	6J	475	300
185/55R15		82	H	6J	475	300	
185/60R15		84	H	5 1/2J	500	300	
185/60R15		84	T	5 1/2J	500	300	
185/60R15 XL		88	H	5 1/2J	560	340	
185/65R15		88	H	5 1/2J	560	300	
185/65R15		88	T	5 1/2J	560	300	
185/65R15 XL		92	T	5 1/2J	630	340	
195/50R15		82	V	6J	475	300	
195/55R15		85	H	6J	515	300	
195/55R15		85	V	6J	515	300	
195/60R15		88	H	6J	560	300	
195/60R15		88	V	6J	560	300	
195/65R15		91	H	6J	615	300	
195/65R15		91	T	6J	615	300	
195/65R15		91	V	6J	690	300	
195/65R15 XL		95	H	6J	615	340	
195/65R15 XL		95	T	6J	615	340	
205/50R15		86	V	6 1/2J	530	300	
205/55R15		88	V	6 1/2J	560	300	
205/60R15		91	H	6J	615	300	
205/65R15		94	H	6J	670	300	
205/65R15		94	V	6J	670	300	
205/60R15		91	V	6J	615	300	
205/70R15		96	T	6J	710	300	
215/60R15		94	H	6 1/2J	670	300	
215/65R15 XL		100	H	6 1/2J	800	340	
16		185/50R16	81	V	6J	462	300
		185/55R16	83	V	6J	487	300
	195/50R16	84	V	6J	500	300	
	195/50R16 XL	88	V	6J	560	340	
	195/55R16	87	H	6J	545	300	
	195/55R16	87	V	6J	545	300	
	195/55R16 XL	91	V	6J	615	340	
	195/60R16	89	H	6J	580	300	
	195/60R16	89	V	6J	580	300	
	195/65R16	92	H	6J	630	300	
	205/50R16	87	H	6 1/2J	545	300	
	205/50R16	87	V	6 1/2J	545	300	
	205/55R16	91	V	6 1/2J	615	300	
	205/55R16	91	H	6 1/2J	615	300	
	205/60R16	92	H	6J	630	300	
	205/60R16	92	V	6J	630	300	
	205/60R16 XL	96	V	6J	710	340	
	205/65R16	95	H	6J	690	300	
	215/55R16	93	V	7J	650	300	
	215/60R16	95	H	6 1/2J	690	300	
	215/60R16	95	V	6 1/2J	690	300	
	215/60R16 XL	99	V	6 1/2J	775	340	
	215/60R16 XL	99	H	6 1/2J	775	340	
	215/65R16	98	H	6 1/2J	750	300	
	225/50R16	92	V	7J	630	300	
	225/55R16 XL	99	H	7J	775	340	
	225/55R16 XL	99	V	7J	775	340	
	225/60R16	98	V	6 1/2J	750	300	
	225/70R16	103	H	6 1/2J	875	300	
235/60R16	100	H	7J	800	300		
255/70R16 XL	115	H	7 1/2J	1215	340		
17	195/60R17	90	H	6J	600	300	
	205/50R17 XL	93	V	6 1/2J	650	340	
	205/55R17 XL	95	V	6 1/2J	690	340	
	215/50R17 XL	95	V	7J	690	340	
	215/55R17	94	V	7J	670	300	
	215/60R17	96	H	6 1/2J	710	300	
	225/50R17	94	V	7J	670	300	
	225/50R17 XL	98	V	7J	750	340	
	225/60R17	99	H	6 1/2J	775	300	
	225/60R17	99	V	6 1/2J	775	300	
	225/65R17	102	H	6 1/2J	850	300	
	235/55R17	99	V	7 1/2J	775	300	
	235/60R17	102	H	7J	850	300	

Four Grooves



# GREEN-Max

UHP TIRE WITH EXCELLENT WET GRIP AND LOW NOISE

- Excellent handling performance;
- Improved drainage performance to effectively reduce risk of hydroplaning;
- Superior driving stability;
- Comfortable ride;
- Designed to fit premium cars and sports cars.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)	
15	185/45R15	75	V	6j	387	300	
	195/45R15	78	V	6 1/2j	425	300	
16	195/45R16 XL	84	V	6 1/2j	500	340	
	205/45R16 XL	87	W	7j	545	340	
	205/50R16	87	W	6 1/2j	545	300	
	205/50R16	87	V	6 1/2j	545	300	
	205/55R16 XL	94	W	6 1/2j	670	340	
	215/40R16 XL	86	W	7 1/2j	530	340	
	215/45R16 XL	90	V	7j	600	340	
	215/55R16 XL	97	W	7j	730	340	
	225/50R16 XL	96	V	7j	710	340	
	225/55R16	95	V	7j	690	300	
17	185/35R17 XL	82	V	6 1/2j	475	340	
	195/40R17 XL	81	V	8j	462	340	
	205/40R17 XL	84	W	7 1/2j	500	340	
	205/45R17 XL	88	W	7j	560	340	
	205/45R17 XL	88	V	7j	560	340	
	205/50R17 XL	93	W	6 1/2j	650	340	
	215/40R17 XL	87	W	7 1/2j	545	340	
	215/45R17 XL	91	W	7j	615	340	
	215/50R17 XL	95	V	7j	690	340	
	215/50R17 XL	95	W	7j	690	340	
	215/55R17	94	V	7j	670	300	
	215/55R17 XL	98	W	7j	750	340	
	225/45R17 XL	94	W	7 1/2j	670	340	
	225/50R17 XL	98	W	7j	750	340	
	225/55R17	97	W	7j	730	300	
	225/55R17 XL	101	W	7j	825	340	
	235/45ZR17 XL	97	W	8j	730	340	
	235/50R17	96	Y	7 1/2j	710	300	
	245/40R17	91	W	8 1/2j	615	300	
	245/45R17 XL	99	W	8j	775	340	
18	165/40R18 XL	85	V	6j	515	340	
	185/35R18	81	H	6 1/2j	462	340	
	195/35R18 XL	88	W	7j	560	340	
	205/35R18 XL	81	H	7 1/2j	462	340	
	205/40R18 XL	86	W	7 1/2j	530	340	
	215/35R18 XL	84	W	7 1/2j	500	340	
	215/40R18 XL	89	W	7 1/2j	580	340	
	215/45R18 XL	93	W	7j	650	340	
	225/40R18 XL	92	W	8j	630	340	
	225/45R18 XL	95	W	7 1/2j	690	340	
	235/40R18 XL	95	W	8 1/2j	690	340	
	235/45R18 XL	98	Y	8j	750	340	
	235/50R18 XL	101	W	7 1/2j	825	340	
	245/40R18 XL	97	W	8 1/2j	730	340	
	245/45R18 XL	100	W	8j	800	340	
	255/35R18 XL	94	Y	9j	670	340	
	255/45R18 XL	103	W	8 1/2j	875	340	
	265/35R18 XL	97	Y	9 1/2j	730	340	
	19	215/35R19 XL	85	W	7 1/2j	515	340
		225/35R19 XL	88	W	8j	560	340
225/45R19 XL		96	W	7 1/2j	710	340	
225/50R19 XL		107	V	7j	975	340	
225/55R19		99	H	7j	775	300	
235/35R19 XL		91	W	8 1/2j	615	340	
235/55R19 XL		105	W	7 1/2j	925	340	
245/40R19 XL		98	W	8 1/2j	750	340	
245/45R19		98	Y	8j	750	300	
265/30R19 XL		93	W	9 1/2j	650	340	
20	215/30R20 XL	82	W	7 1/2j	475	340	
	225/30R20 XL	85	W	8j	515	340	
	225/35R20 XL	90	Y	8j	600	340	
	235/30R20 XL	88	Y	8 1/2j	560	340	
	245/35R20 XL	95	Y	8 1/2j	690	340	
	245/45R20	99	W	8j	775	300	
22	265/40R22 XL	106	V	9 1/2j	950	340	
	285/40R22 XL	110	V	10j	1060	340	



# GREEN-Max HP<sup>010</sup>

LOW NOISE AND FUEL-EFFICIENT

- Low rolling resistance and energy saving;
- Reduce carbon dioxide emissions for environmental protection;
- Excellent wet braking performance for safe and comfortable driving;

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
14	165/60R14	75	H	5j	387	300
	165/80R14	85	S	4 1/2j	515	300
	175/65R14	82	H	5j	475	300
	175/65R14 XL	86	H	5j	530	340
15	165/50R15	73	V	5j	365	300
	165/55R15	75	V	5j	387	300
	165/60R15	77	H	5j	412	300
	175/60R15	81	H	5j	462	300
16	175/65R15	84	H	5j	500	300
	165/45R16 XL	74	V	5 1/2j	375	340
17	165/40R17 XL	75	V	6j	387	340

M+S

Three Grooves

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)	
14	185/55R14	80	H	6j	450	300	
	185/60R14	82	H	5 1/2j	475	300	
	185/65R14	86	H	5 1/2j	530	300	
	195/65R14	89	H	6j	580	300	
15	185/55R15	82	V	6j	475	300	
	185/60R15	84	H	5 1/2j	500	300	
	185/60R15 XL	88	H	5 1/2j	560	340	
	185/65R15	88	H	5 1/2j	560	300	
	195/50R15	82	V	6j	475	300	
	195/55R15	85	V	6j	515	300	
	195/60R15	88	H/V	6j	560	300	
	195/65R15	91	H/V	6j	615	300	
	195/65R15 WW	91	H	6j	615	300	
	205/55R15	88	V	6 1/2j	560	300	
	205/60R15	91	H/V	6j	615	300	
	205/65R15	94	H/V	6j	670	300	
	215/65R15 XL	100	H	6 1/2j	800	340	
	16	185/50R16	81	H	6j	462	300
		195/50R16 XL	88	V	6j	560	340
		195/55R16	87	V	6j	545	300
195/55R16 XL		91	H	6j	615	340	
195/60R16		89	H	6j	580	300	
205/50R16		87	V	6 1/2j	545	300	
205/55R16		91	H/V	6 1/2j	615	300	
205/60R16		92	H/V	6j	630	300	
205/65R16		95	H	6j	690	300	
215/60R16		95	H	6 1/2j	690	300	
215/60R16 XL		99	H/V	6 1/2j	775	340	
215/65R16		98	H	6 1/2j	750	300	
17	225/65R16	100	H	6 1/2j	800	300	
	225/70R16	103	H	6 1/2j	875	300	
	235/65R16	103	H	7j	875	300	
	255/65R16	109	H	7 1/2j	1030	300	
	205/55R17 XL	95	V	6 1/2j	690	340	
	215/60R17	96	H	6 1/2j	710	300	
	225/45R17 XL	94	H	7 1/2j	670	340	
	225/65R17	102	H	6 1/2j	850	300	

M+S

Four Grooves



# GREEN-Max EcoTouring

## ECO-FRIENDLY TIRE

- Low rolling resistance;
- Low noise;
- Excellent performance in wet conditions.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kpa)	Inflated Pressure (kg)
12	145/70R12	69	S	4.50B	325	300
	155/70R12	73	S	4.50B	365	300
13	145/70R13	71	T	4.50B	345	300
	145/80R13	75	T	4.00B	387	300
	155/65R13	73	T	4.50B	365	300
	155/70R13	75	T	4.50B	387	300
	155/80R13	79	T	4.50B	437	300
	165/65R13	77	T	5.00B	412	300
	165/70R13	79	T	5.00B	437	300
	175/60R13	77	H	5.00B	412	300
	175/60R13	77	T	5.00B	412	300
	175/65R13	80	T	5.00B	450	300
	175/70R13	82	T	5.00B	475	300
14	155/65R14	75	T	4 1/2J	387	300
	165/65R14	79	T	5J	437	300
	165/70R14	81	T	5J	462	300
	175/65R14	82	T	5J	475	300
	175/65R14 XL	86	T	5J	530	340
	175/70R14	84	T	5J	500	300
	175/70R14 XL	88	T	5J	560	340

M+S

Three Grooves

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
14	185/65R14	86	T	5 1/2J	530	300
	185/70R14	88	T	5 1/2J	560	300
	195/70R14	91	T	6J	615	300
15	205/60R14	88	H	6J	560	300
	185/65R15	88	T	5 1/2J	560	300
	185/65R15 XL	92	T	5 1/2J	630	340
	195/65R15	91	T	6J	615	300
	195/65R15 XL	95	T	6J	690	340
15	205/70R15	96	T	6J	710	300
	235/75R15	105	T	6 1/2J	925	300

M+S

Four Grooves



# CrossWind

## ULTRA HIGH PERFORMANCE TIRE

- Directional tread pattern design;
- Excellent handling performance;
- Low noise.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)	
13	175/50R13 XL	76	V	5.50B	400	340	
14	185/50R14	77	V	6J	412	300	
15	195/50R15	82	V	6J	475	300	
	195/55R15	85	H	6J	515	300	
16	195/45R16 XL	84	V	6 1/2J	500	340	
	205/45R16 XL	87	W	7J	545	340	
	205/50R16	87	V/W	6 1/2J	545	300	
	205/55R16 XL	94	W	6 1/2J	670	340	
	215/40R16 XL	86	W	7 1/2J	530	340	
	215/55R16 XL	97	W	7J	730	340	
	225/50R16 XL	96	V	7J	710	340	
	205/40R17 XL	84	W	7 1/2J	500	340	
	205/45R17 XL	88	W	7J	560	340	
	205/50R17 XL	93	W	6 1/2J	650	340	
17	215/40R17 XL	87	W	7 1/2J	545	340	
	215/45R17 XL	91	W	7J	615	340	
	215/50R17	91	V	7J	615	300	
	215/50R17 XL	95	W	7J	690	340	
	215/55R17 XL	98	W	7J	750	340	
	225/45R17 XL	94	W	7 1/2J	670	340	
	225/50R17 XL	98	W	7J	750	340	
	225/55R17 XL	101	W	7J	825	340	
	235/45R17 XL	97	W	8J	730	340	
	235/55R17 XL	103	W	7 1/2J	875	340	
	245/40R17 XL	95	W	8 1/2J	690	340	
	245/45R17 XL	99	W	8J	775	340	
	18	215/35R18 XL	84	W	7 1/2J	500	340
		225/40R18 XL	92	W	8J	630	340
225/45R18 XL		95	W	7 1/2J	690	340	
225/50R18		95	V	7J	690	300	
235/40R18 XL		95	W	8 1/2J	690	340	
235/45R18		94	W	8J	670	300	
235/50R18 XL		101	W	7 1/2J	825	340	
245/40R18 XL		97	W	8 1/2J	730	340	
245/45R18 XL		100	W	8J	800	340	
255/45R18 XL		103	W	8 1/2J	875	340	
265/35R18 XL		97	H	9 1/2J	730	340	
265/60R18 XL		114	H	8J	1180	340	
19		235/35R19 XL	91	W	8 1/2J	615	340
		235/40R19 XL	96	V	8 1/2J	710	340
	235/55R19 XL	105	W	7 1/2J	925	340	
	245/40R19 XL	98	W	8 1/2J	750	340	
	255/35R19 XL	96	W	9J	710	340	
	265/30R19 XL	93	W	9 1/2J	650	340	
	20	225/35R20 XL	90	W	8J	600	340
235/30R20 XL		88	Y	8 1/2J	560	340	
235/45R20 XL		100	W	8J	800	340	
245/35R20 XL		95	W	8 1/2J	690	340	
245/45R20 XL		103	W	8J	875	340	
245/50R20		102	V	7 1/2J	850	300	
255/35R20		97	W	9J	730	340	
265/45R20		104	W	9J	900	300	
265/50R20 XL		111	V	8 1/2J	1090	340	
275/40R20 XL		106	W	9 1/2J	950	340	
275/45R20 XL		110	V	9J	1060	340	
275/50R20 XL		113	W	8 1/2J	1150	340	
275/55R20 XL		117	W	8 1/2J	1285	340	
22	235/30R22 XL	90	W	8 1/2J	600	340	
	245/30R22 XL	92	W	8 1/2J	630	340	
	255/30R22 XL	95	V	9J	730	340	
	265/35R22 XL	102	W	9 1/2J	850	340	
	305/40R22 XL	114	V	11J	1180	340	
	305/45R22 XL	118	V	10J	1320	340	
24	305/35R24 XL	112	V	11J	1120	340	
26	305/30R26 XL	109	W	11J	1030	340	

M+S



# CROSSWIND R791

HIGH WEAR RESISTANCE AND GOOD HANDLING

- High wear resistance;
- Quiet and comfort;
- Specially designed for taxis.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
12	145/80R12	74	T	4J	375	300
13	165/80R13	83	S	4.50B	485	300
14	175/70R14 XL	88	H	5J	560	340
	185/60R14	82	H	5 1/2J	475	300
	195/60R14	86	H	6J	530	300
15	175/50R15	75	H	5 1/2J	387	300
	185/60R15	84	H	5 1/2J	500	300
	195/60R15	88	H	6J	560	300
	195/65R15	91	H	6J	615	300
16	205/55R16	91	H	6 1/2J	615	300



# CrossWind EcoTouring

SUPER WEAR RESISTANCE

- Excellent wear resistance;
- Low noise;
- Improved water evacuation.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
12	175/70R12	80	H	5.00B	450	300
13	165/60R13	73	T	5.00B	365	300
	175/70R13	82	T	5.00B	475	300
	175/75R13	84	T	5J	500	300
14	175/65R14	82	T	5J	475	300
	175/75R14	86	T	5J	530	300

M+S Three Grooves

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
13	185/70R13	86	T	5.50B	530	300
	185/65R14	86	T	5 1/2J	530	300
14	185/70R14	88	T	5 1/2J	560	300
	195/70R14	91	T	6J	615	300
	185/65R15	88	T	5 1/2J	560	300
15	195/50R15	82	H	6J	475	300
	195/60R15	88	H	6J	560	300
	195/65R15	91	H	6J	615	300
	205/60R15	91	H	6J	615	300
	205/65R15	94	H	6J	670	300
	205/70R15	96	T	6J	710	300
	205/75R15	97	S	5 1/2J	730	300
	215/70R15	98	T	6 1/2J	750	300
	215/75R15	100	S	6J	800	300
	225/70R15	100	T	6 1/2J	800	300
	225/75R15	102	S	6J	850	300
	235/75R15	105	S	6 1/2J	925	300
	205/55R16	91	H	6 1/2J	615	300
	16	205/60R16	92	H	6J	630
205/65R16		95	H	6J	690	300
215/60R16		95	H	6 1/2J	690	300
215/65R16		98	H	6 1/2J	750	300
215/70R16		100	T	6 1/2J	800	300
225/60R16		98	H	6 1/2J	750	300
225/65R16		100	H	6 1/2J	800	300
225/70R16		100	H	6 1/2J	800	300
225/70R16 XL		107	H	6 1/2J	975	340
235/70R16		106	H	7J	950	300
245/70R16		107	H	7J	975	300
245/75R16		111	H	7J	1090	300
255/70R16		111	S	7 1/2J	1090	300
265/70R16		112	S	8J	1120	300
265/75R16	116	H	7 1/2J	1250	300	

M+S Four Grooves



# CrossWind HP<sup>010</sup>

HP TIRE WITH EXCELLENT HANDLING PERFORMANCE, HIGH MILEAGE AND LOW NOISE

- Good straight driving stability;
- Comfortable and quiet ride;
- Excellent handling performance;
- Enhanced wet grip to effectively reduce risk of hydroplaning.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
12	155/70R12 WL	73	T	4.50B	365	300
	165/70R12 WL	77	T	5.00B	412	300
14	165/55R14	72	V	5J	355	300
	175/65R14	82	H	5J	475	300
	175/70R14	84	T	5J	500	300
15	175/65R15	84	H	5J	500	300

M+S Three Grooves

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
14	185/60R14	82	H	5 1/2J	475	300
	185/60R14	82	V	5 1/2J	475	300
	185/65R14	86	H	5 1/2J	530	300
	185/70R14	88	H	5 1/2J	560	300
	185/70R14 XL	92	H	5 1/2J	630	300
	195/70R14	91	H	6J	615	300
	195/70R14 WL	91	H	6J	615	300
15	185/60R15	84	H	5 1/2J	500	300
	185/65R15	88	H	5 1/2J	560	300
	195/50R15	82	V	6J	475	300
	195/55R15	85	V	6J	515	300
	195/60R15	88	H	6J	560	300
	195/65R15	91	H	6J	615	300
	205/60R15	91	H	6J	615	300
	205/65R15	94	H	6J	670	300
	215/60R15	94	H	6 1/2J	670	300
	215/65R15	96	H	6 1/2J	710	300
	215/65R15 XL	100	H	6 1/2J	800	340
16	255/70R15	108	S	7 1/2J	1000	300
	185/55R16	83	V	6J	487	300
	195/50R16	84	V	6J	500	300
	195/55R16	87	H	6J	545	300
	195/60R16 XL	93	H	6J	650	340
	205/55R16	91	H	6 1/2J	615	300
	205/60R16	92	H	6J	630	300
	205/60R16	92	V	6J	630	300
	205/60R16 XL	96	H	6J	710	340
	215/55R16	93	H	7J	650	300
	215/55R16 XL	97	H	7J	730	340
	215/60R16	95	H	6 1/2J	690	300
	215/65R16	98	H	6 1/2J	750	300
	225/55R16	95	V	7J	690	300
225/60R16	98	H	6 1/2J	750	300	
225/65R16	100	H	6 1/2J	800	300	
225/70R16	103	H	6 1/2J	875	300	
235/60R16	100	H	7J	800	300	
235/65R16	103	H	7J	875	300	
17	215/50R17	91	V	7J	615	300
	215/55R17	94	V	7J	670	300
	215/60R17	96	H	6 1/2J	710	300
	215/65R17	99	H	6 1/2J	775	300
	225/45R17	91	H	7 1/2J	615	300
	225/50R17	94	V	7J	670	300
	225/55R17	97	H	7J	730	300
	225/60R17	99	H	6 1/2J	775	300
	225/65R17	102	H	6 1/2J	850	300
	235/55R17	99	H	7 1/2J	775	300
	235/60R17	102	H	7J	850	300
18	235/65R17	104	H	7J	900	300
	225/55R18	98	H	7J	750	300
	235/65R18	106	H	7J	950	300

M+S Four Grooves



# FLASH HERO

NEW PRODUCT

UHP TIRE WITH EXCELLENT HANDLING AND GRIP PERFORMANCE.

- Coherent groove design improves the wet grip performance;
- Directional pattern design improves the linear acceleration performance;
- High strength shoulder pattern design improves lateral grip performance for excellent steering performance.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (Kpa)
17	235/40ZR17	90	W	8 1/2J	600	300
18	225/40ZR18	88	W	8J	560	300
	265/35ZR18	93	W	9 1/2J	650	300



# FLASH 100

NEW PRODUCT

SPORTS TIRE WITH EXCELLENT HANDLING AND WET GRIP PERFORMANCE

- Excellent handling performance provides precise steering for driving.
- Enhanced performance in wet condition.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
18	225/40ZR18	88	W	8J	560	300
	255/50R18 XL	106	V	8J	950	340
	255/55R18	109	V	8J	1030	340
	265/35ZR18	93	W	9 1/2J	650	340
	265/60R18	110	V	8J	1060	300

M+S

# SPORT UTILITY VEHICLE TIRE





# GRIP MASTER C/S

NEW PRODUCT

GOOD HANDLING AND COMFORTABLE PERFORMANCE

- Excellent grip and handling performance.
- Comfortable and quiet ride.
- Superior wet grip and safe driving.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
15	205/70R15	96	H	6J	710	300
	215/70R15	98	H	6 1/2J	750	300
16	215/65R16 XL	102	H	6 1/2J	850	340
	215/70R16	100	H	6 1/2J	800	300
	225/65R16	100	H	6 1/2J	800	300
	225/70R16	103	H	6 1/2J	875	300
	225/75R16	104	H	6J	900	300
	235/60R16	100	H	7J	800	300
	235/70R16	106	H	7J	950	300
	245/70R16 XL	111	H	7J	1090	340
	255/70R16	111	H	7 1/2J	1090	300
	275/70R16	114	H	8J	1180	300
17	215/55R17 XL	98	V	7J	750	340
	215/60R17	96	H	6 1/2J	710	300
	215/65R17 XL	103	V	6 1/2J	875	340
	225/55R17 XL	101	V	7J	825	340
	225/65R17 XL	106	V	6 1/2J	950	340
	235/60R17 XL	106	V	7J	950	340
	235/65R17 XL	108	V	7J	1000	340
	255/60R17	106	H	7 1/2J	950	300
	255/65R17	110	H	7 1/2J	1060	300
	265/65R17	112	H	8J	1120	300
275/55R17	109	V	8 1/2J	1030	300	
18	215/50R18	92	W	7J	630	300
	215/55R18 XL	99	V	7J	775	340
	225/55R18	98	V	7J	750	300
	225/50R18 XL	99	W	7J	775	340
	225/60R18 XL	104	V	6 1/2J	900	340
	235/50R18	97	V	7 1/2J	730	300
	235/55R18 XL	104	W	7 1/2J	900	340
	235/60R18 XL	107	W	7J	975	340
	255/40R18 XL	99	W	9J	775	340
	255/55R18 XL	109	Y	8J	1030	340
	255/60R18 XL	112	V	7 1/2J	1120	340
	275/60R18	113	H	8J	1150	300
	285/60R18	116	H	8 1/2J	1250	300
19	205/55R19 XL	97	V	6 1/2J	730	340
	225/55R19	99	V	7J	775	300
	235/45R19 XL	99	V	8J	775	340
	235/55R19 XL	105	W	7 1/2J	925	340
	255/40R19 XL	100	W	9J	800	340
	255/45R19 XL	104	W	8 1/2J	900	340
	255/55R19 XL	111	W	8J	1090	340
	265/50R19 XL	110	V	8 1/2J	1060	340
	285/45R19 XL	111	W	9 1/2J	1090	340
	20	195/55R20 XL	95	H	6J	690
235/45R20 XL		100	W	8J	800	340
245/45R20 XL		103	W	8J	875	340
255/40R20 XL		101	W	9J	825	340
255/45R20 XL		105	Y	8 1/2J	925	340
265/45R20 XL		108	Y	9J	1000	340
265/50R20 XL		111	W	8 1/2J	1090	340
275/40R20 XL		106	V	9 1/2J	950	340
21	275/45R20 XL	110	W	9J	1060	340
	315/35R20 XL	110	Y	11J	1060	340
	245/40R21 XL	100	W	8 1/2J	800	340
	255/40R21 XL	102	W	9J	850	340
	275/45R21 XL	110	W	9J	1060	340



# CROSSWIND 4x4 HP

SUV TIRE WITH LOW ROLLING RESISTANCE AND LOW NOISE

- Excellent handling performance;
- Enhanced drainage performance to effectively reduce risk of hydroplaning;
- Superior longitudinal stability for more comfortable ride;
- Low noise to offer a quiet ride.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)	
15	205/70R15	96	H	6J	710	300	
	215/70R15	98	H	6 1/2J	750	300	
16	215/65R16 XL	102	H	6 1/2J	850	340	
	215/70R16	100	H	6 1/2J	800	300	
	225/65R16	100	H	6 1/2J	800	300	
	225/75R16	104	H	6J	900	300	
	235/60R16	100	H	7J	800	300	
	235/70R16	106	H	7J	950	300	
	245/70R16 XL	111	H	7J	1090	340	
	265/70R16	112	H	8J	1120	300	
	275/70R16	114	H	8J	1180	300	
	17	215/60R17	96	H	6 1/2J	710	300
225/55R17 XL		101	V	7J	825	340	
225/65R17		102	H	6 1/2J	850	300	
235/55R17 XL		103	V	7 1/2J	875	340	
235/60R17 XL		106	V	7J	950	340	
235/65R17 XL		108	V	7J	1000	340	
245/65R17 XL		111	H	7J	1090	340	
255/60R17		106	H	7 1/2J	950	300	
255/65R17		110	H	7 1/2J	1060	300	
265/65R17		112	H	8J	1120	300	
275/55R17		109	V	8 1/2J	1030	300	
18		225/55R18	98	V	7J	750	300
		225/60R18	100	H	6 1/2J	800	300
	235/55R18 XL	104	V	7 1/2J	900	340	
	235/60R18 XL	107	V	7J	975	340	
	235/65R18	106	H	7J	950	300	
	245/60R18	105	V	7J	925	300	
	255/55R18 XL	109	V	8J	1030	340	
	255/60R18 XL	112	V	7 1/2J	1120	340	
	255/65R18	111	H	7 1/2J	1090	300	
	265/60R18	110	H	8J	1060	300	
	265/65R18	114	H	8J	1180	300	
	265/70R18	116	T	8J	1250	300	
	275/60R18	113	H	8J	1150	300	
275/65R18	116	H	8J	1250	300		
19	235/50R19 XL	103	V	7 1/2J	875	340	
	235/55R19 XL	105	V	7 1/2J	925	340	
	245/55R19	103	V	7 1/2J	875	300	
	255/50R19 XL	107	W	8J	975	340	
	255/55R19 XL	111	V	8J	1090	340	
	255/60R19	109	H	7 1/2J	1030	300	
	235/55R20 XL	105	V	7 1/2J	925	340	
20	245/50R20	102	V	7 1/2J	850	300	
	255/50R20 XL	109	V	8J	1030	340	
	265/50R20 XL	111	V	8 1/2J	1090	340	
	275/55R20 XL	117	V	8 1/2J	1285	340	

M+S



# CROSSWIND H/T

SUV TIRE FOR URBAN ROAD USE,  
WITH LOW NOISE AND GOOD DRY/WET PERFORMANCE

- High drainage capability;
- High comfort and low noise;
- Excellent handling performance.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
15	235/75R15 XL	/	109	T	6 1/2J	1030	340
	31X10.50R15LT	6PR	109	R	8 1/2J	1030	350
	31X10.50R15LT	6PR	109	Q	8 1/2J	1030	350
16	215/70R16	/	100	T	6 1/2J	800	300
	225/70R16	/	103	T	6 1/2J	875	300
	225/70R16 XL	/	107	T	6 1/2J	975	340
	235/70R16	/	106	T	7J	950	300
	245/70R16	/	107	T	7J	975	300
	245/75R16	/	111	T	7J	1090	300
	255/70R16	/	111	T	7 1/2J	1090	300
	265/70R16	/	112	T	8J	1120	300
	265/75R16	/	116	T	7 1/2J	1250	300
	LT215/85R16	10PR	115/112	S	6J	D 1120 S 1215	550
	LT215/85R16	10PR	115/112	Q	6J	D 1120 S 1215	550
	LT225/75R16	10PR	115/112	S	6J	D 1120 S 1215	550
LT225/75R16	10PR	115/112	Q	6J	D 1120 S 1215	550	
LT235/85R16	10PR	120/116	R	6 1/2J	D 1250 S 1400	550	
LT235/85R16	10PR	120/116	Q	6 1/2J	D 1250 S 1400	550	
LT245/75R16	10PR	120/116	R	7J	D 1250 S 1400	550	
LT245/75R16	10PR	120/116	Q	7J	D 1250 S 1400	550	
LT265/75R16	10PR	123/120	R	7 1/2J	D 1400 S 1550	550	
17	235/65R17	/	104	T	7J	900	300
	245/65R17	/	107	T	7J	975	300
	245/70R17	/	110	T	7J	1060	300
	265/65R17	/	112	T	8J	1120	300
	265/70R17	/	115	T	8J	1215	300
	275/65R17	/	115	S	8J	1215	300
	285/65R17	/	116	S	8 1/2J	1250	300
	LT245/75R17	10PR	121/118	R	7J	D 1320 S 1450	550
	LT245/75R17	10PR	121/118	Q	7J	D 1320 S 1450	550
	LT265/70R17	10PR	121/118	R	8J	D 1320 S 1450	550
LT265/70R17	10PR	121/118	Q	8J	D 1320 S 1450	550	
18	LT265/70R18	10PR	124/121	R	8J	D 1450 S 1600	550
20	275/55R20 XL	/	117	T	8 1/2J	1285	340

M+S



# CROSSWIND A/T

ALL TERRAIN TIRE

- Excellent wet performance;
- Large angle grooves to improve self-cleaning ability;
- An optimal balance between performance on road and off road.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
14	175/70R14 XL	/	88	H	5J	560	340
	175/75R14	/	86	T	5J	530	300
	175/80R14	/	88	T	5J	560	300
15	205/60R15	/	91	H	6J	615	300
	205/65R15	/	94	H	6J	670	300
	205/70R15	/	96	T	6J	710	300
	225/75R15	/	102	S	6J	850	300
	235/75R15 XL	/	109	T	6 1/2J	1030	340
	255/70R15	/	108	T	7 1/2J	1000	300
	265/70R15	/	112	T	8J	1120	300
	265/70R15 OWL	/	112	S	8J	1120	300
	265/70R15 OWL	/	112	Q	8J	1120	300
	31X10.50R15LT	6PR	109	R	8 1/2J	1030	350
	31X10.50R15LT OWL	6PR	109	Q	8 1/2J	1030	350
	LT215/75R15	6PR	100/97	S	6J	D 730 S 800	350
	LT215/75R15	6PR	100/97	Q	6J	D 730 S 800	350
	LT225/75R15	6PR	102/99	S	6J	D 775 S 850	350
	LT235/75R15	6PR	104/101	R/S	6 1/2J	D 825 S 900	350
	LT235/75R15	6PR	104/101	Q	6 1/2J	D 825 S 900	350
	LT235/75R15 OWL	6PR	104/101	Q	6 1/2J	D 825 S 900	350
	LT235/75R15	10PR	116/113	S	6 1/2J	D 1150 S 1250	550
16	205/60R16	/	92	H	6J	630	300
	215/65R16	/	98	T	6 1/2J	750	300
	215/70R16	/	100	T	6 1/2J	800	300
	225/70R16	/	103	T	6 1/2J	875	300
	225/70R16 XL	/	107	T	6 1/2J	975	340
	235/70R16	/	106	T/Q	7J	950	300
	245/70R16 XL	/	111	T	7J	1090	340
	245/75R16	/	111	T	7J	1090	300
	255/70R16	/	111	S	7 1/2J	1090	300
	265/70R16 OWL	/	112	Q/T	8J	1120	300
	265/75R16 OWL	/	116	T/Q	7 1/2J	1250	300
	275/70R16 OWL	/	114	S	8J	1180	300
	275/70R16 OWL	/	114	Q	8J	1180	300
	205R16LT	8PR	110/108	R/Q	6J	D 1000 S 1060	450
	LT215/85R16	10PR	115/112	Q	6J	D 1120 S 1215	550
	LT225/75R16	10PR	115/112	Q	6J	D 1120 S 1215	550
	LT235/85R16	10PR	120/116	S	6 1/2J	D 1250 S 1400	550
	LT235/85R16	10PR	120/116	Q	6 1/2J	D 1250 S 1400	550
LT245/75R16	10PR	120/116	Q	7J	D 1260 S 1380	550	
LT265/75R16	8PR	119/116	Q	7 1/2J	D 1250 S 1360	450	
LT265/75R16	10PR	123/120	R	7 1/2J	D 1400 S 1550	550	
LT285/75R16	10PR	126/123	R	8J	D 1550 S 1700	550	
LT305/70R16	10PR	124/121	R	9J	D 1450 S 1600	450	
17	225/65R17 XL WL	/	106	T	6 1/2J	950	340
	225/65R17 XL	/	106	T	6 1/2J	950	340
	235/65R17	/	104	T	7J	900	300
	245/65R17 XL	/	111	T	7J	1090	340
	245/70R17	/	110	S	7J	1060	300
	265/65R17	/	112	T/Q	8J	1120	300
	265/70R17	/	115	T	8J	1215	300
	275/65R17 XL WL	/	119	T	8J	1360	340
	P285/70R17 OWL	/	117	T	8 1/2J	1285	300

M+S

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
17	P285/70R17 OWL	/	117	Q	8 1/2J	1285	300
	LT235/80R17 OWL	10PR	120/117	R	6 1/2J	D 1285 S 1400	550
	LT235/80R17 OWL	10PR	120/117	Q	6 1/2J	D 1285 S 1400	550
	LT245/70R17 WL	10PR	119/116	Q	7J	D 1250 S 1360	550
	LT245/75R17 OWL	10PR	121/118	R	7J	D 1320 S 1450	550
	LT245/75R17 OWL	10PR	121/118	Q	7J	D 1320 S 1450	550
	LT265/70R17 OWL	10PR	121/118	R/Q	8J	D 1320 S 1450	550
	LT285/70R17 OWL	8PR	121/118	S	8 1/2J	D 1320 S 1450	450
	LT285/70R17 OWL	8PR	121/118	Q	8 1/2J	D 1320 S 1450	450
	LT305/70R17 OWL	8PR	119/116	R	9J	D 1250 S 1360	350
LT305/70R17 OWL	8PR	119/116	Q	9J	D 1250 S 1360	350	
18	235/60R18 XL WL	/	107	T	7J	975	340
	255/55R18 XL WL	/	109	T	8J	1030	340
	265/60R18	/	110	T	8J	1060	300
	265/60R18	/	110	Q	8J	1060	300
	265/60R18 WL	/	110	T	8J	1060	300
	265/70R18	/	116	T	8J	1250	300
	265/70R18 OWL	/	116	Q	8J	1250	300
	275/65R18 OWL	/	116	T	8J	1250	300
	275/65R18 OWL	/	116	Q	8J	1250	300
	285/60R18	/	116	T	8 1/2J	1250	300
	285/60R18 WL	/	116	T	8 1/2J	1250	300
	285/60R18	/	116	Q	8 1/2J	1250	300
	LT265/70R18	10PR	124/121	S	8J	D 1450 S 1600	550
	LT275/65R18	10PR	123/120	S	8J	D 1400 S 1550	550
	LT275/70R18	8PR	121/118	Q	8J	D 1320 S 1450	450
	LT275/70R18	10PR	125/122	S	8J	D 1500 S 1650	550
20	P275/55R20	/	111	S	8 1/2J	1090	300
	P275/60R20	/	114	T	8J	1180	300
	LT265/60R20 WL	10PR	121/118	R	8J	D 1320 S 1450	550
	LT265/60R20 OWL	10PR	121/118	Q	8J	D 1320 S 1450	550
	LT275/65R20	10PR	126/123	S	8J	D 1550 S 1700	550
	LT285/55R20	10PR	122/119	S	9J	D 1360 S 1500	550
	LT285/65R20	10PR	127/124	S	8 1/2J	D 1600 S 1750	550
	35X12.50R20LT	10PR	121	Q	10J	1450	450

M+S



## CROSSWIND A/T<sup>100</sup>

LOW NOISE ALL-WEATHER TIRE

- All Weather Capability;
- Comfortable Quiet Ride;
- Excellent Snow and Wet Braking;
- Off-Road Traction.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
15	205/70R15	/	96	T	6J	710	300
	235/75R15 XL	/	109	T	6 1/2J	1030	340
	255/70R15	/	108	T	7 1/2J	1000	300
	265/70R15	/	112	T	8J	1120	300
	265/70R15	/	112	T	8J	1120	300
	31X10.50R15LT	6PR	109	R	8 1/2J	1030	350
	LT215/75R15	6PR	100/97	S	6J	D 730 S 800	350
	LT225/75R15	6PR	102/99	S	6J	D 775 S 850	350
	LT235/75R15	6PR	104/101	S	6 1/2J	D 825 S 900	350
16	235/70R16	/	106	T	7J	950	300
	245/70R16 XL	/	111	T	7J	1090	340
	205R16LT	8PR	110/108	Q	6J	D 1000 S 1060	450
	LT225/75R16	10PR	115/112	Q	6J	D 1120 S 1215	550
17	245/65R17 XL	/	111	T	7J	1090	340
	265/65R17	/	112	T	8J	1120	300

M+S





# CROSSWIND M/T

## MUD-TERRAIN TIRE

- High floatation;
- Higher load-carrying capacity;
- Excellent self-cleaning performance;
- Aggressive tread pattern and sidewall design.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)	
14	205R14C	8PR	109/107	R	6J	D 975 S 1030	450	
15	30X9.50R15LT	6PR	104	Q	7 1/2J	900	350	
	31X10.50R15LT	6PR	109	Q	8 1/2J	1030	350	
	33X12.50R15LT	6PR	108	Q	10J	1000	250	
	LT215/75R15	6PR	100/97	Q	6J	D 730 S 800	350	
16	LT235/75R15	6PR	104/101	Q	6 1/2J	D 825 S 900	350	
	215/80R16	/	107	S	6J	975	290	
	205R16LT	8PR	110/108	Q	6J	D 1000 S 1060	450	
	LT225/75R16	8PR	110/107	Q	6J	D 975 S 1060	450	
	LT235/70R16	8PR	110/107	Q	7J	D 975 S 1060	450	
	LT235/85R16	10PR	120/116	Q	6 1/2J	D 1260 S 1380	550	
	LT245/75R16	10PR	120/116	Q	7J	D 1260 S 1380	550	
	LT255/70R16	8PR	115/112	Q	7 1/2J	D 1120 S 1215	450	
	LT265/70R16	6PR	110/107	Q	8J	D 975 S 1060	350	
	LT265/75R16	8PR	119/116	Q	7 1/2J	D 1250 S 1360	450	
	LT265/75R16	10PR	123/120	Q	7 1/2J	D 1400 S 1550	550	
	LT285/75R16	6PR	116/113	Q	8J	D 1150 S 1250	350	
	LT285/75R16	10PR	126/123	Q	8J	D 1550 S 1700	550	
	LT305/70R16	8PR	118/115	Q	9J	D 1215 S 1320	350	
	LT305/70R16	10PR	124/121	Q	9J	D 1450 S 1600	450	
	LT315/75R16	8PR	121/118	Q	8 1/2J	D 1320 S 1450	350	
	LT315/75R16	10PR	127/124	Q	10J	D 1600 S 1750	450	
	17	LT235/80R17	10PR	120/117	Q	6 1/2J	D 1285 S 1400	550
		LT255/75R17	6PR	111/108	Q	7J	D 1000 S 1090	350
LT265/65R17		10PR	120/117	Q	8J	D 1285 S 1400	550	
LT265/70R17		10PR	121/118	Q	8J	D 1320 S 1450	550	
LT285/70R17		8PR	121/118	Q	8 1/2J	D 1320 S 1450	450	
LT285/70R17		10PR	121/118	Q	8 1/2J	D 1320 S 1450	550	
LT305/70R17		8PR	119/116	Q	9J	D 1250 S 1360	350	
LT305/70R17		10PR	121	Q	10J	1450	450	
LT265/60R18		10PR	119/116	Q	8J	D 1250 S 1360	550	
LT275/70R18		10PR	125/122	Q	8J	D 1500 S 1650	550	
18	LT285/65R18	10PR	125/122	Q	8 1/2J	D 1500 S 1650	550	
	33X12.50R18LT	10PR	118	Q	10J	1320	450	
	33X12.50R18LT	12PR	122	Q	10J	1500	550	
	35X12.50R18LT	10PR	123	Q	10J	1550	450	
	35X12.50R18LT	12PR	128	Q	10J	1800	550	
	LT275/65R20	10PR	126/123	P	8J	D 1550 S 1700	550	
	LT285/55R20	10PR	122/119	Q	9J	D 1360 S 1500	550	
	LT285/65R20	10PR	127/124	Q	8 1/2J	D 1600 S 1750	550	
20	LT305/55R20	10PR	121/118	Q	9 1/2J	D 1320 S 1450	450	
	33X12.50R20LT	10PR	114	Q	10J	1180	450	
	33X12.50R20LT	12PR	119	Q	10J	1360	550	
	35X12.50R20LT	10PR	121	Q	10J	1450	450	
	35X12.50R20LT	12PR	125	Q	10J	1650	550	
	37X13.50R20LT	10PR	127	Q	11J	1750	450	
	37X13.50R20LT	12PR	128	Q	10J	1800	550	
	38X15.50R20LT	8PR	125	Q	12J	1650	350	
	33X12.50R22LT	10PR	109	Q	10J	1030	450	
	33X12.50R22LT	12PR	114	Q	10J	1180	550	
22	35X12.50R22LT	10PR	117	Q	10J	1285	450	
	35X12.50R22LT	12PR	121	Q	10J	1450	550	
	37X13.50R22LT	10PR	123	Q	11J	1550	450	
	37X13.50R22LT	12PR	128	Q	11J	1800	550	
	35X12.50R24LT	10PR	117	Q	10 1/2J	1285	450	
24	37X13.50R24LT	10PR	120	Q	11J	1400	450	
	37X13.50R26LT	10PR	117	Q	11J	1285	450	

M+S



# GREEN-Max 4x4 HP

NEW PRODUCT

## SUV TIRES FOR URBAN HIGHWAY USE, WITH GOOD HANDLING AND LOW NOISE

- Excellent handling performance;
- Enhanced drainage performance to effectively reduce risk of hydroplaning;
- Superior longitudinal stability for more comfortable ride;
- Low noise to offer a quiet ride.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
15	205/70R15	96	H	6J	710	300
16	215/65R16 XL	102	H	6 1/2J	850	340
	215/70R16	100	H	6 1/2J	800	300
	225/65R16	100	H	6 1/2J	800	300
	225/75R16	104	H	6J	900	300
	235/60R16	100	H	7J	800	300
	235/70R16	106	H	7J	950	300
	245/70R16 XL	111	H	7J	1090	340
	265/70R16	112	H	8J	1120	300
17	275/70R16	114	H	8J	1180	300
	215/60R17	96	H	6 1/2J	710	300
	215/65R17 XL	103	V	6 1/2J	875	340
	225/55R17 XL	101	V	7J	825	340
	225/65R17	102	H	6 1/2J	850	300
	225/60R17	99	V	6 1/2J	775	300
	235/55R17 XL	103	V	7 1/2J	875	340
	235/60R17 XL	106	V	7J	950	340
	235/65R17 XL	108	V	7J	1000	340
	245/65R17 XL	111	H	7J	1090	340
	255/60R17	106	H	7 1/2J	950	300
	255/65R17	110	H	7 1/2J	1060	300
	265/65R17	112	H	8J	1120	300
	275/55R17	109	V	8 1/2J	1030	300
18	215/55R18 XL	99	V	7J	775	340
	215/55R18	95	V	7J	690	300
	225/55R18	98	V	7J	750	300
	225/60R18	100	H	6 1/2J	800	300
	235/50R18	97	V	7 1/2J	730	300
	235/55R18 XL	104	V	7 1/2J	900	340
	235/60R18 XL	107	V	7J	975	340
	255/55R18 XL	109	V/W	8J	1030	340
	255/60R18 XL	112	V	7 1/2J	1120	340
	265/60R18	110	H	8J	1060	300
	275/60R18	113	H	8J	1150	300
19	225/55R19	99	V	7J	775	300
	255/50R19 XL	107	W	8J	975	340
	255/55R19 XL	111	V	8J	1090	340
	265/50R19 XL	110	W	8 1/2J	1060	340
	265/50R20 XL	111	V	8 1/2J	1090	340
20	275/40R20 XL	106	V	9 1/2J	950	340
	275/45R20 XL	110	V	9J	1060	340
	315/35R20 XL	110	W	11J	1060	340
	295/35R21 XL	107	W	10 1/2J	975	340
22	275/40R22 XL	107	W	9 1/2J	975	340
	285/35R22 XL	106	V	10J	950	340

M+S



## RADIAL620

ALL TERRAIN TIRE

- Excellent wet performance;
- An optimal balance between performance on road and off road.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
14	185R14C	8PR	102/100	Q	5 1/2J	D 800 S 850	450
	195R14C	8PR	106/104	Q	5 1/2J	D 875 S 925	450
15	205/70R15	/	96	H	6J	710	300
	265/70R15	/	112	T	8J	1120	300
16	205/80R16 XL	/	104	T	5 1/2J	900	340
	215/65R16	/	98	H	6 1/2J	750	300
	215/70R16	/	100	T	6 1/2J	800	300
	225/75R16 XL	/	108	R	6J	1000	340
	235/70R16	/	106	T	7J	950	300
	245/70R16	/	107	H	7J	975	300
	245/70R16 XL	/	111	H	7J	1090	340
	265/70R16	/	112	H	8J	1120	300
17	235/65R17 XL	/	108	H	7J	1000	340
	275/55R17	/	109	V	8 1/2J	1030	300

M+S



## LMB3

ALL TERRAIN TIRE

- Excellent traction and handling performance;
- Excellent wear resistance performance;
- All Terrain Tire.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
15	215/75R15	/	100	S	6J	800	300
	P215/75R15	/	100	S	6J	800	300
	235/75R15	/	105	S	6 1/2J	925	300
	P235/75R15	/	105	S	6 1/2J	925	300
	195/70R15C	8PR	99/96	R	6J	D710 S775	450
	195/70R15C(WHITE)	8PR	104/102	R	6J	D850 S900	450

# ALL SEASON TIRE





## GREEN-Max All Season

### ALL SEASON TIRE

- Excellent handling;
- Lower rolling resistance;
- All season tire which is applicable to different weather and road conditions.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
13	145/70R13	71	T	4.50B	345	300
	145/80R13	75	T	4.00B	387	300
	155/65R13	73	T	4.50B	365	300
	155/70R13	75	T	4.50B	387	300
	155/80R13	79	T	4.50B	437	300
	165/70R13	79	T	5.00B	437	300
	175/65R13	80	T	5.00B	450	300
14	175/70R13	82	T	5.00B	475	300
	155/65R14	75	T	4 1/2J	387	300
	165/60R14	75	H	5J	387	300
	165/65R14	79	T	5J	437	300
	165/70R14	81	T	5J	462	300
	175/65R14	82	T	5J	475	300
	175/70R14 XL	88	T	5J	560	340
	175/80R14	88	T	5J	560	300
	185/55R14	80	H	6J	450	300
	185/60R14	82	H	5 1/2J	475	300
15	185/65R14	86	H	5 1/2J	530	300
	185/70R14	88	H	5 1/2J	560	300
	195/70R14	91	T	6J	615	300
	165/60R15	77	H	5J	412	300
	165/65R15	81	T	5J	462	300
	175/65R15 XL	88	T	5J	560	340
	185/55R15	82	H	6J	475	300
	185/60R15 XL	88	H	5 1/2J	560	340
	185/65R15	88	H	5 1/2J	560	300
	195/50R15 XL	86	H	6J	530	340
	195/55R15	85	H	6J	515	300
	195/60R15	88	H	6J	560	300
	195/65R15	91	H	6J	615	300
16	205/65R15	94	H	6J	670	300
	215/65R15	96	H	6 1/2J	710	300
	195/45R16 XL	84	H	6 1/2J	500	340
	195/50R16 XL	88	V	6J	560	340
	195/55R16	87	H	6J	545	300
	205/45R16	83	V	7J	487	300
	205/55R16	91	V	6 1/2J	615	300
	205/60R16 XL	96	H	6J	710	340
	215/45R16 XL	90	V	7J	600	340
	215/55R16 XL	97	V	7J	730	340
	215/60R16 XL	99	H	6 1/2J	775	340
	215/65R16 XL	102	V	6 1/2J	850	340
	215/70R16	100	H	6 1/2J	800	300
	225/55R16 XL	99	V	7J	775	340
225/60R16 XL	102	V	6 1/2J	850	340	
17	205/45R17 XL	88	V	7J	560	340
	205/50R17 XL	93	V	6 1/2J	650	340
	205/55R17 XL	95	V	6 1/2J	690	340
	215/40R17 XL	87	V	7 1/2J	545	340
	215/45R17 XL	91	V	7J	615	340
	215/50R17 XL	95	V	7J	690	340
	215/55R17 XL	98	V	7J	750	340
	215/60R17 XL	100	V	6 1/2J	800	340
	225/45R17 XL	94	V	7 1/2J	670	340
	225/50R17 XL	98	V	7J	750	340
	225/55R17 XL	101	V	7J	825	340
	225/60R17 XL	103	V	6 1/2J	875	340
	225/65R17	102	H	6 1/2J	850	300
	235/45R17 XL	97	V	8J	730	340
	235/55R17 XL	103	V	7 1/2J	875	340
	235/65R17 XL	108	V	7J	1000	340
	245/45R17 XL	99	V	8J	775	340
	18	215/55R18 XL	99	V	7J	775
225/40R18 XL		92	V	8J	630	340
225/45R18 XL		95	V	7 1/2J	690	340
245/40R18 XL		97	V	8 1/2J	730	340
19	225/35R19 XL	88	V	8J	560	340
	235/35R19 XL	91	V	8 1/2J	615	340



## GREEN-Max Van 4S

### FOR ALL SEASON COMMERCIAL

- Various design of the 3D sipe, Optimization tread pattern stiffness distribution, The tire have good wet&ice road grip performance.
- Application of spring hole, product with Excellent appearance.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
14	165/70R14C	6PR	89/87	R	5J	D 545 S 580"	375
	175/65R14C	6PR	90/88	T	5J	"D 560 S 600"	375
	175/70R14C	6PR	95/93	T	5J	"D 650 S 690"	375
15	195/70R15C	8PR	104/102	R	6J	D 850 S 900	450
	205/70R15C	8PR	106/104	R	6J	D 900 S 950	450
	225/70R15C	8PR	112/110	S	6 1/2J	D 1060 S 1120	450
	215/70R15C	8PR	109/107	R	6 1/2J	D 975 S 1030	450
16	185/75R16LT	8PR	104/102	R	5J	D 850 S 900	475
	195/60R16C	6PR	99/97	R	6J	D 730 S 775	375
	195/65R16C	8PR	104/102	R	6J	D 850 S 900	475
	195/75R16C	8PR	107/105	R	5 1/2J	D 925 S 975	475
	205/65R16C	8PR	107/105	T	6J	D 925 S 975	475
	205/75R16C	8PR	110/108	T	5 1/2J	D 1000 S 1060	475
	215/60R16LT	6PR	103/101	T	6 1/2J	D 825 S 875	375
	215/65R16C	8PR	109/107	T	6 1/2J	D 975 S 1030	475
	215/75R16C	8PR	113/111	R	6J	D 1090 S 1150	475
	225/65R16C	8PR	112/110	S	6 1/2J	D 1060 S 1120	475
17	225/75R16C	10PR	118/116	R	6J	D 1250 S 1320	525
	235/65R16C	8PR	115/113	R	7J	D 1150 S 1215	475
	215/60R17C	8PR	109/107	T	6 1/2J	D 975 S 1030	475



# GRIP MASTER 4S

NEW PRODUCT

HIGH PERFORMANCE ALL SEASON TIRE

- Excellent wet performance;
- Excellent grip performance to effectively improve the safety of driving on the wet surface;
- Tread compound with low temperature resistance for winter and summer conditions;

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
13	155/80R13	79	T	4.50B	437	300
	155/70R13	75	T	4.50B	387	300
	165/70R13	79	T	5.00B	437	300
14	155/65R14	75	T	4 1/2J	387	300
	165/60R14	75	H	5J	387	300
	165/65R14	79	T	5J	437	300
	165/70R14	81	T	5J	462	300
	175/65R14	82	T	5J	475	300
	175/70R14 XL	88	T	5J	560	340
	185/60R14	82	H	5 1/2J	475	300
	185/65R14	86	H	5 1/2J	530	300
	165/65R15	81	T	5J	462	300
15	175/65R15 XL	88	T	5J	560	340
	185/55R15	82	H	6J	475	300
	185/60R15 XL	88	H	5 1/2J	560	340
	185/65R15	88	H	5 1/2J	560	300
	195/50R15 XL	86	H	6J	530	340
	195/55R15	85	H	6J	515	300
	195/60R15	88	H	6J	560	300
	195/65R15	91	H	6J	615	300
	205/65R15	94	H	6J	670	300
	195/45R16 XL	84	V	6 1/2J	500	340
16	195/55R16	87	V	6J	545	300
	205/55R16	91	V	6 1/2J	615	300
	205/60R16 XL	96	V	6J	710	340
	215/55R16 XL	97	V	7J	730	340
	215/60R16 XL	99	V	6 1/2J	775	340
	215/65R16 XL	102	V	6 1/2J	850	340
	215/70R16	100	H	6 1/2J	800	300
	245/70R16	107	H	7J	975	300
	205/45R17 XL	88	W	7J	560	340
	205/50R17 XL	93	V	6 1/2J	650	340
17	205/55R17 XL	95	W	6 1/2J	690	340
	215/40R17 XL	87	V	7 1/2J	545	340
	215/45R17 XL	91	W	7J	615	340
	215/50R17 XL	95	W	7J	690	340
	215/55R17 XL	98	V	7J	750	340
	215/60R17 XL	100	V	6 1/2J	800	340
	225/45R17 XL	94	W	7 1/2J	670	340
	225/50R17 XL	98	V	7J	750	340
	225/55R17 XL	101	V	7J	825	340
	225/60R17 XL	103	V	6 1/2J	875	340
	225/65R17 XL	106	V	6 1/2J	950	340
	235/45R17 XL	97	W	8J	730	340
	235/55R17 XL	103	W	7 1/2J	875	340
	235/65R17 XL	108	V	7J	1000	340
	245/45R17 XL	99	W	8J	775	340
18	215/40R18 XL	89	W	7 1/2J	580	340
	215/50R18 XL	96	W	7J	710	340
	215/55R18 XL	99	W	7J	775	340
	225/40R18 XL	92	W	8J	630	340
	225/45R18 XL	95	W	7 1/2J	690	340
	235/45R18 XL	98	W	8J	750	340
	235/55R18	100	W	7 1/2J	800	300
	245/40R18 XL	97	W	8 1/2J	730	340
19	225/35R19 XL	88	W	8J	560	340
	225/45R19 XL	96	W	7 1/2J	710	340
	235/35R19 XL	91	W	8 1/2J	615	340
	245/45R19 XL	102	W	8J	850	340

M+S



# TRAILER TIRE



# CROSSWIND R781

SPECIALLY DESIGNED FOR TRAILER

- Low fuel consumption;
- Specially designed for trailer.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
13	ST175/80R13	6PR	91/87	M	5J	D 545 S 615	350
14	ST205/75R14	6PR	100/96	M	5 1/2J	D 710 S 800	350
	ST205/75R14	8PR	105/101	M	5 1/2J	D 825 S 925	450
15	ST215/75R14	6PR	102/98	M	6J	D 750 S 850	350
	ST205/75R15	8PR	107/102	M	5 1/2J	D 850 S 975	450
	ST205/75R15	6PR	101/97	M	5 1/2J	D 730 S 825	350
15	ST225/75R15	8PR	113/108	M	6J	D 1000 S 1150	450
	ST225/75R15	10PR	117/112	M	6J	D 1120 S 1285	550
16	ST235/80R16	10PR	123/119	M	6 1/2J	D 1360 S 1550	550
	ST235/85R16	10PR	125/121	M	6 1/2J	D 1450 S 1650	550

M+S



# RADIAL R701

## BUDGET TIRE

- Low fuel consumption;
- Budget Tires.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
10	195/55R10C	/	98/96	N	6J	D 710 S 750	625
12	155/70R12	/	73	S	4.50B	365	300
	175/70R12	/	80	H	5.00B	450	300
	155/70R12C	/	100/98	N	4 1/2J	D 750 S 800	650
	155/70R12C	/	104/102	N	4 1/2J	D 850 S 900	625
	185/60R12C	/	104/101	N	5 1/2J	D 825 S 900	650
	195/60R12C	/	104/102	N	6J	D 850 S 900	650
13	135/80R13 XL	/	74	N	3.50B	375	340
	145/70R13	/	74	N	4.50J	345	300
	145/80R13 XL	/	79	N	4.00B	437	340
	155/70R13	/	75	N	4.50B	387	300
	155/80R13 XL	/	84	N	4.50B	500	340
	165/60R13	/	73	T	5.00B	365	300
	165/65R13	/	77	N	5.00B	412	300
	165/70R13	/	79	N	5.00B	437	300
	175/70R13	/	82	N/H	5.00B	475	300
	175/70R13 XL	/	86	N	5.00B	530	340
	185/70R13	/	86	N	5 1/2J	530	300
	165R13C	8PR	94/92	N	4 1/2J	D 630 S 670	450
	165R13C	8PR	96/94	N	4 1/2J	D 670 S 710	450
	185/70R13C	/	106/104	N	5 1/2J	D 900 S 950	600
	195/50R13C	/	104/101	N	6J	D 825 S 900	650
14	165/55R14	/	72	H	5J	355	300
	175/65R14	/	82	T/H	5J	475	300
	185/60R14	/	82	H	5 1/2J	475	300
	185/65R14	/	86	T	5 1/2J	530	300
	185/70R14	/	88	T	5 1/2J	560	300
	195/70R14	/	91	T	6J	615	300
	195/70R14 XL	/	96	N	6J	710	340
	165R14LT	6PR	91/90	S	4 1/2J	D 600 S 615	350
	165R14LT	8PR	96/95	T	4 1/2J	D 690 S 710	450
	185R14C	8PR	102/100	N	5 1/2J	D 800 S 850	450
	185R14C	/	104/102	N	5 1/2J	D 850 S 900	500
195R14C	8PR	106/104	N	5J	D 900 S 950	450	
15	185/65R15	/	88	T	5 1/2J	560	300
	195/50R15	/	82	H	6J	475	300
	195/55R15	/	85	H	6J	515	300
	195/60R15	/	88	H	6J	560	300
	195/65R15	/	91	H	6J	615	300
	205/60R15	/	91	H	6J	615	300
	205/65R15	/	94	H	6J	670	300
	205/70R15	/	96	T	6J	710	300
	205/75R15	/	97	S	5 1/2J	730	300
16	205/55R16	/	91	H	6 1/2J	615	300
	205/60R16	/	92	H	6J	630	300
	205/65R16	/	95	H	6J	690	300

M+S

# LIGHT TRUCK TIRE





## GREEN-Max Van PLUS

COMMERCIAL TIRE WITH HIGH GRIP PERFORMANCE

- Better grip performance;
- Low rolling resistance for higher energy efficiency;
- Excellent wear resistance performance.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
12	145R12C	8PR	86/84	Q	4.00B	D 500 S 530	450
13	165R13C	8PR	94/93	R	4 1/2J	D 650 S 670	450
14	195R14C	8PR	106/104	P	5 1/2J	D 900 S 950	450
15	205/70R15C	8PR	106/104	S	6J	D 900 S 950	450
	215/70R15C	8PR	109/107	R	6 1/2J	D 975 S 1030	450



## GREEN-Max Van HP

COMMERCIAL TIRE WITH HIGH GRIP PERFORMANCE

- Excellent stability;
- Great grip performance and driving force of turning;
- Low rolling resistance for higher energy efficiency.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
14	175/65R14C	6PR	90/88	T	5J	D 560S 600	375
15	215/65R15C	6PR	104/102	T	6 1/2J	D 850S 900	375
16	195/65R16C	8PR	104/102	R	6J	D 850 S 900	475
	205/65R16C	8PR	107/105	R	6J	D 925 S 975	475
	215/60R16C	6PR	103/101	T	6 1/2J	D 825S 875	375
	215/65R16C	8PR	109/107	R	6 1/2J	D 975 S 1030	475
	225/65R16C	8PR	112/110	R	6 1/2J	D 1060 S 1120	475
	235/65R16C	8PR	115/113	R	7J	D 1150 S 1215	475



## RADIAL666

COMMERCIAL TIRE WITH EXCELLENT WEAR AND WET PERFORMANCE

- Excellent traction;
- Excellent wet braking;
- High wear resistance.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
12	155R12C	6PR	83/81	N	4.50B	D 462 S 487	350
13	175R13LT	8PR	97/95	Q	5.00B	D 690 S 730	450
14	165/70R14C	6PR	89/87	R	5J	D 545 S 580	375
	185R14C	8PR	102/100	R/Q	5 1/2J	D 800 S 850	450
	185R14LT	6PR	97/95	R	5 1/2J	D 690 S 730	350
	185R14LT	8PR	102/100	R	5 1/2J	D 800 S 850	450
	195R14C	8PR	106/104	P	5 1/2J	D 900 S 950	450
	195R14C WR	8PR	106/104	P	5 1/2J	D 900 S 950	450
	195/75R14C	8PR	106/104	R	5 1/2J	D 900 S 950	475
	205/75R14C	8PR	109/107	R	5 1/2J	D 975 S 1030	475
	215R14C	8PR	110/108	R	6J	D 1000 S 1060	450
15	215/75R14C	8PR	112/110	R	6J	D 1060 S 1120	475
	195R15C	8PR	106/104	R	5 1/2J	D 900 S 950	450
	195R15C WR	8PR	106/104	R	5 1/2J	D 900 S 950	450
	195/70R15C	8PR	104/102	R	6J	D 850 S 900	450
	195/70R15LT	10PR	104/102	R	6J	D 850 S 900	550
	205/70R15C	8PR	106/104	S	6J	D 900 S 950	450
	205/70R15C WR	8PR	106/104	S	6J	D 950 S 900	450
	215/70R15C	8PR	109/107	R	6 1/2J	D 975 S 1030	450
	215/70R15C WR	8PR	109/107	R	6 1/2J	D 975 S 1030	450
	225/70R15C	8PR	112/110	R	6 1/2J	D 1060 S 1120	450
16	255/70R15C	6PR	112/110	S	7 1/2J	D 1060 S 1120	375
	175/75R16C	8PR	101/99	R	5J	D 775 S 825	475
	185/75R16C	8PR	104/102	R	5J	D 850 S 900	475
	195/65R16C	8PR	104/102	R	6J	D 850 S 900	475
	195/75R16C	8PR	107/105	R	5 1/2J	D 925 S 975	475
	205/65R16C	8PR	107/105	R	6J	D 925 S 975	475
	205/75R16C	8PR	110/108	R	5 1/2J	D 1000 S 1060	475
	215/65R16C	8PR	109/107	R	6 1/2J	D 975 S 1030	475
	215/70R16C	6PR	108/106	S	6 1/2J	D 950 S 1000	375
	215/75R16C	8PR	113/111	R	6J	D 1090 S 1150	475
	225/65R16C	8PR	112/110	R	6 1/2J	D 1060 S 1120	475
M+S	225/75R16C	10PR	121/120	R	6J	D 1400 S 1450	575
	235/65R16C	8PR	115/113	R	7J	D 1150 S 1215	475



## GREEN-Max Van

COMMERCIAL TIRE WITH HIGH GRIP PERFORMANCE

- Excellent grip performance;
- Low rolling resistance and fuel saving.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
12	5.00R12LT	10PR	88/86	P	3.50B	D 530 S 560	550
	155R12C	8PR	88/86	N	4.50B	D 530 S 560	450
13	155R13C	8PR	91/89	P	41/2J	D 580 S 615	450
	165R13C	8PR	94/93	R	41/2J	D 650 S 670	450
	165/70R13LT	8PR	88/85	S	5.00B	D 515 S 560	450
	175R13C	8PR	97/95	Q	5.00B	D 690 S 730	450
14	165/70R14 XL	/	85	H	5J	515	340
	185/65R14 XL	/	90	H	5 1/2J	600	340
	185/70R14 XL	/	92	H	5 1/2J	630	340
	165/70R14C	6PR	89/87	R	5J	D 545 S 580	375
	175R14LT	8PR	99/97	R	5J	D 730 S 775	450
	175/70R14C	6PR	95/93	T	5J	D 650 S 690	375
	175/75R14LT	8PR	94/91	S	5J	D 615 S 670	450
	185R14C	8PR	102/100	R	5 1/2J	D 800 S 850	450
	195R14C	8PR	106/104	P	5 1/2J	D 900 S 950	450
	205R14C	8PR	109/107	R	6J	D 975 S 1030	450
15	215R14C	8PR	112/110	R	6J	D 1060 S 1120	450
	185R15LT	8PR	103/102	R	5 1/2J	D 850 S 875	450
	195R15C	8PR	106/104	R	5 1/2J	D 900 S 950	450
	195/70R15C	8PR	104/102	R	6J	D 850 S 900	450
	205/70R15C	8PR	106/104	S	6J	D 900 S 950	450
	215/70R15C	8PR	109/107	R	6 1/2J	D 975 S 1030	450
16	225/70R15C	8PR	112/110	R	6 1/2J	D 1060 S 1120	450
	255/70R15C	6PR	112/110	S	7 1/2J	D 1060 S 1120	375
	185/75R16C	8PR	104/102	R	5J	D 850 S 900	475
	195/75R16C	8PR	107/105	R	5 1/2J	D 925 S 975	475
	205/75R16C	8PR	110/108	R	5 1/2J	D 1000 S 1060	475
	215/70R16C	6PR	108/106	T	6 1/2J	D 950 S 1000	375
	215/75R16C	8PR	113/111	R	6J	D 1090 S 1150	475
	225/75R16C	10PR	121/120	R	6J	D 1400 S 1450	575
225/75R16LT	12PR	119/116	R	6J	D 1250 S 1360	650	



## LMC4

INCREASED MILEAGE WITH HIGH WEAR RESISTANCE

- Excellent wear resistance performance.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
15	6.50R15LT	8PR	101/97	N	5.50F	D 730 S 825	460
	7.00R15LT	10PR	110/105	L	5.50F	D 925 S 1060	560
16	6.50R16C	10PR	107/103	N	5.50F	D 875 S 975	560
	6.50R16C	10PR	108/107	L	5.50F	D 975 S 1000	500
	6.50R16C	12PR	110/105	M	5.50F	D 925 S 1060	670
	7.50R16LT	10PR	116/112	L	6.00G	D 1120 S 1250	560
	7.50R16LT	14PR	122/118	L	6.00G	D 1320 S 1500	770
	7.50R16LT	12PR	120/116	M	5.50F	D 1250 S 1400	670



## WINTER TIRE



# NORD MASTER

NEW PRODUCT

EXCELLENT SNOW HANDLING AND ICE BRAKING&ACCELERATION

- Directional grooves design for evacuating snow and mud;
- Complex soft tread compound and 3D sipes technology to promote handling performance in icy and snowy condition.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
14	185/65R14 XL	90	T	5 1/2J	600	340
15	185/65R15 XL	92	T	5 1/2J	630	340
	195/65R15 XL	95	T	6J	690	340
16	205/55R16 XL	94	T	6 1/2J	670	340
	205/60R16 XL	96	T	6J	710	340
	215/65R16 XL	102	T	6 1/2J	850	340
17	205/40R17 XL	84	T	7 1/2J	500	340
	205/45R17 XL	88	T	7J	560	340
	205/55R17 XL	95	T	6 1/2J	690	340
	215/40R17 XL	87	T	7 1/2J	545	340
	215/50R17 XL	95	T	7J	690	340
	215/55R17 XL	98	T	7J	750	340
	225/45R17 XL	94	T	7 1/2J	670	340
	225/50R17 XL	98	T	7J	750	340
	225/55R17 XL	101	T	7J	825	340
	245/40R17 XL	95	T	8 1/2J	690	340
18	215/40R18 XL	89	T	7 1/2J	580	340
	225/40R18 XL	92	T	8J	630	340
	225/45R18 XL	95	T	7 1/2J	690	340
	235/45R18 XL	98	T	8J	750	340
	255/35R18 XL	94	T	9J	670	340
19	265/35R18 XL	97	T	9 1/2J	730	340
	215/35R19 XL	85	T	7 1/2J	515	340
	225/35R19 XL	88	T	8J	560	340
	225/45R19 XL	96	T	7 1/2J	710	340
	235/35R19 XL	91	T	8 1/2J	615	340
	245/35R19 XL	93	T	8 1/2J	650	340
	245/40R19 XL	98	T	8 1/2J	750	340
	255/35R19 XL	96	T	9J	710	340
20	255/35R20 XL	97	T	9J	730	340
	275/35R20 XL	102	T	9 1/2J	850	340
	275/50R20 XL	113	T	8 1/2J	1150	340

M+S



# GREEN-Max Winter Grip SUV

STUDDABLE SNOW TIRE WITH OUTSTANDING BRAKING PERFORMANCE IN ICE&SNOW CONDITIONS

- Designed for ice and snow surface;
- Excellent snow traction performance with directional tread pattern design;
- Great grip and handling performance on ice and snow surface;
- Designed for SUVs.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
17	225/65R17 XL	106	T	6 1/2J	950	340
	235/60R17 XL	106	T	7J	950	340
	235/65R17 XL	108	T	7J	1000	340
	265/70R17	115	T	8J	1215	300
18	225/55R18	98	T	7J	750	300
	255/55R18 XL	109	T	8J	1030	340
	275/60R18 XL	117	T	8J	1285	340
20	275/45R20 XL	110	T	9J	1060	340
	275/55R20 XL	117	T	8 1/2J	1285	340

M+S Studdable Tires



# GREEN-Max Winter UHP

ULTRA HIGH PERFORMANCE SNOW TIRES WITH SUPERIOR HANDLING PERFORMANCE

- Excellent snow handling performance.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
15	185/55R15 XL	86	H	6J	530	340
	195/50R15	82	H	6J	475	300
	195/55R15	85	H	6J	515	300
16	195/55R16 XL	91	H	6J	615	340
	225/55R16 XL	99	H	7J	775	340
	225/60R16 XL	102	H	6 1/2J	850	340
17	205/45R17 XL	88	V	7J	560	340
	205/50R17 XL	93	V	6 1/2J	650	340
	215/45R17 XL	91	V	7J	615	340
	215/50R17 XL	95	V	7J	690	340
	215/55R17	94	V	7J	670	300
	215/60R17	96	H	6 1/2J	710	300
	225/45R17 XL	94	V	7 1/2J	670	340
	225/50R17 XL	98	V	7J	750	340
	225/55R17 XL	101	V	7J	825	340
	235/45R17 XL	97	H	8J	730	340
18	235/55R17 XL	103	V	7 1/2J	875	340
	225/40R18 XL	92	V	8J	630	340
	225/45R18 XL	95	H	7 1/2J	690	340
	235/45R18 XL	98	V	8J	750	340
	235/55R18 XL	104	H	7 1/2J	900	340
	235/60R18 XL	107	H	7J	975	340
	245/40R18 XL	97	V	8 1/2J	730	340
	245/45R18 XL	100	H	8J	800	340
	235/55R19 XL	105	V	7 1/2J	925	340
	245/40R19 XL	98	V	8 1/2J	750	340
19	245/45R19 XL	102	V	8J	850	340
	255/35R19 XL	96	V	9J	710	340
	255/40R19 XL	100	V	9J	800	340
	255/45R19 XL	104	H	8 1/2J	900	340
	255/50R19 XL	107	V	8J	975	340
	255/55R19 XL	111	H	8J	1090	340
	275/40R19 XL	105	V	9 1/2J	925	340
	245/45R20 XL	103	H	8J	875	340
20	255/35R20 XL	97	V	9J	730	340
	275/40R20 XL	106	V	9 1/2J	950	340
	275/45R20 XL	110	H	9J	1060	340
	315/35R20 XL	110	V	11J	1060	340

M+S



## GREEN-Max Winter HP

HIGH PERFORMANCE SNOW TIRES WITH EXCELLENT BRAKING PERFORMANCE

- Excellent snow braking performance;
- Comfortably snow driving.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
13	155/70R13	75	T	4.50B	387	300
	155/80R13	79	T	4.50B	437	300
	165/70R13	79	T	5.00B	437	300
	175/70R13	82	T	5.00B	475	300
14	155/65R14	75	T	4 1/2J	387	300
	165/65R14	79	T	5J	437	300
	165/70R14	81	T	5J	462	300
	175/65R14 XL	86	H	5J	530	340
	175/70R14	84	T	5J	500	300
	185/60R14	82	T	5 1/2J	475	300
	185/65R14	86	T	5 1/2J	530	300
	175/65R15 XL	88	H	5J	560	340
15	185/60R15 XL	88	H	5 1/2J	560	340
	185/65R15 XL	92	H	5 1/2J	630	340
	195/60R15 XL	92	H	6J	630	340
	195/65R15 XL	95	T	6J	690	340
	205/65R15 XL	99	H	6J	775	340
	205/70R15	96	T	6J	710	300
	205/55R16 XL	94	H	6 1/2J	670	340
	205/60R16 XL	96	H	6J	710	340
16	215/55R16 XL	97	H	7J	730	340
	215/60R16 XL	99	H	6 1/2J	775	340
	215/65R16	98	H	6 1/2J	750	300
	215/65R16	98	H	6 1/2J	750	300



## GREEN-Max Winter Van

EXCELLENT SNOW TRACTION PERFORMANCE

- Excellent snow traction performance;
- Focus on driving safety of vehicles in winter.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
13	165R13C	6PR	89/88	Q	4.50B	D 560 S 580	350
14	175R14C	6PR	94/92	Q	5J	D 630 S 670	350
	185R14C	8PR	102/100	Q	6J	D 800 S 850	450
	195R14C	8PR	106/104	P	5 1/2J	D 900 S 950	450
15	195/70R15C	8PR	104/102	R	6J	D 850 S 900	450
	225/70R15LT	8PR	106/103	R	6 1/2J	D 875 S 950	450
	225/70R15C	8PR	112/110	R	6 1/2J	D 1060 S 1120	450
16	175/75R16C	8PR	101/99	R	5J	D 775 S 825	475
	185/75R16C	8PR	104/102	R	5J	D 850 S 900	475
	195/75R16C	8PR	107/105	R	5 1/2J	D 925 S 975	475
	205/75R16C	8PR	110/108	R	5 1/2J	D 1000 S 1060	475
	215/75R16C	8PR	113/111	R	6J	D 1090 S 1150	475
	225/65R16C	8PR	112/110	R	6 1/2J	D 1060 S 1120	475
	225/75R16C	10PR	121/120	R	6J	D 1400 S 1450	575
	235/65R16C	10PR	121/119	R	7J	D 1360 S 1450	575
	235/65R16C	10PR	121/119	R	7J	D 1360 S 1450	575



## GREEN-Max Winter Grip

STUDDABLE SNOW TIRE WITH OUTSTANDING BRAKING PERFORMANCE ON ICE & SNOW CONDITION

- Designed for ice and snow surface;
- Directional tread pattern design for excellent snow traction performance;
- Great grip and handling performance on ice and snow surface.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
13	155/70R13	75	T	4.50B	387	300
	155/80R13	79	T	4.50B	437	300
	165/70R13	79	Q	5.00B	437	300
	175/70R13	82	T	5.00B	475	300
14	175/65R14 XL	86	T	5J	530	340
	185/60R14	82	T	5 1/2J	475	300
	185/65R14 XL	90	T	5 1/2J	600	340
	185/70R14 XL	92	T	5 1/2J	630	340
15	185/55R15 XL	86	T	6J	530	340
	185/65R15	88	T	5 1/2J	560	300
	195/60R15 XL	92	T	6J	630	340
	195/65R15 XL	95	T	6J	690	340
	205/65R15 XL	99	T	6J	775	340
16	205/55R16 XL	94	T	6 1/2J	670	340
	205/60R16 XL	96	T	6J	710	340
	215/55R16 XL	97	T	7J	730	340
	215/60R16	95	T	6 1/2J	690	300
	215/65R16	98	T	6 1/2J	750	300
	215/70R16 XL	104	T	6 1/2J	900	340
17	215/50R17 XL	95	T	7J	690	340
	215/55R17 XL	98	T	7J	750	340
	225/45R17 XL	94	T	7 1/2J	670	340
	225/55R17	97	T	7J	730	300





## GREEN-Max Winter GRIP 2

THE SECOND-GENERATION STUDDABLE SNOW TIRE WITH OUTSTANDING BRAKING PERFORMANCE IN ICE&SNOW CONDITIONS

- Designed for ice and snow surface;
- Directional tread pattern design for excellent snow traction performance;
- Great grip and handling performance on ice and snow surface.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)	
14	165/65R14	79	T	5J	437	300	
	165/70R14	81	T	5J	462	300	
	175/65R14 XL	86	T	5J	530	340	
15	175/65R15	84	T	5J	500	300	
	185/60R15	84	T	5 1/2J	500	300	
	185/65R15	88	T	5 1/2J	560	300	
	195/55R15 XL	89	T	6J	580	340	
	195/65R15 XL	95	T	6J	690	340	
	195/45R16 XL	84	T	6 1/2J	500	340	
16	195/60R16 XL	93	T	6J	650	340	
	205/45R16 XL	87	T	7J	545	340	
	205/55R16 XL	94	T	6 1/2J	670	340	
	205/60R16 XL	96	T	6J	710	340	
	215/60R16	95	T	6 1/2J	690	300	
	215/65R16	98	T	6 1/2J	750	300	
	215/70R16	100	T	6 1/2J	800	300	
	225/55R16 XL	99	T	7J	775	340	
	245/70R16 XL	111	T	7J	1090	340	
	265/70R16	112	T	8J	1120	300	
	17	205/45R17 XL	88	T	7J	560	340
		205/55R17 XL	95	T	6 1/2J	690	340
215/40R17 XL		87	T	7 1/2J	545	340	
215/55R17 XL		98	T	7J	750	340	
215/60R17 XL		100	T	6 1/2J	800	340	
215/65R17 XL		103	T	6 1/2J	875	340	
225/50R17 XL		98	T	7J	750	340	
225/55R17		97	T	7J	730	300	
225/60R17 XL		103	T	6 1/2J	875	340	
235/55R17 XL		103	T	7 1/2J	875	340	
225/65R17 XL		106	T	6 1/2J	950	340	
235/65R17 XL		108	T	7J	1000	340	
18	215/40R18 XL	89	T	7 1/2J	580	340	
	225/40R18 XL	92	T	8J	630	340	
	225/45R18 XL	95	T	7 1/2J	690	340	
	235/50R18 XL	101	T	7 1/2J	825	340	
	235/60R18 XL	107	T	7J	975	340	
	245/40R18 XL	97	T	8 1/2J	730	340	
	245/50R18 XL	104	T	7 1/2J	900	340	
	255/60R18 XL	112	T	7 1/2J	1120	340	
19	225/35R19 XL	88	T	8J	560	340	
	235/40R19 XL	96	T	8 1/2J	710	340	
	245/35R19 XL	93	T	8 1/2J	650	340	
	245/40R19 XL	98	T	8 1/2J	750	340	
	245/45R19 XL	102	T	8J	850	340	
	255/40R19 XL	100	T	9J	800	340	
	255/45R19 XL	104	T	8 1/2J	900	340	
20	255/55R19 XL	111	T	8J	1090	340	
	245/40R20 XL	99	T	8 1/2J	775	340	
	245/45R20 XL	103	T	8J	875	340	
	255/35R20 XL	97	T	9J	730	340	
	255/50R20 XL	109	T	8J	1030	340	
	265/50R20 XL	111	T	8 1/2J	1090	340	



## GREEN-Max Winter Ice I-15

OUTSTANDING HANDLING PERFORMANCE

- Direction tread pattern design providing excellent handling performance;
- Directional grooves to help evacuate snow and mud.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
14	175/65R14 XL	86	T	5J	530	340
15	185/60R15 XL	88	T	5 1/2J	560	340
	185/65R15 XL	92	T	5 1/2J	630	340
	195/65R15 XL	95	T	6J	690	340
16	195/55R16 XL	91	T	6J	615	340
	205/55R16 XL	94	T	6 1/2J	670	340
	205/60R16 XL	96	T	6J	710	340
	215/55R16 XL	97	T	7J	730	340
	215/60R16 XL	99	T	6 1/2J	775	340
	215/65R16 XL	102	T	6 1/2J	850	340
	225/55R16 XL	99	T	7J	775	340
17	205/50R17 XL	93	T	6 1/2J	650	340
	225/45R17 XL	94	T	7 1/2J	670	340
	225/50R17 XL	98	T	7J	750	340
	225/55R17 XL	101	T	7J	825	340
	235/45R17 XL	97	T	8J	730	340



## GREEN-Max Winter GRIP VAN2

NEW PRODUCT

STUDDABLE SNOW TIRE WITH OUTSTANDING BRAKING PERFORMANCE IN ICE&SNOW CONDITIONS

- Designed for ice and snow surface;
- Great grip and handling performance on ice and snow surface.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)	
10	195/55R10C		98/96	N	6.00B	D 710 S 750	625	
13	155R13C	8PR	90/88	R	4.50B	D 560 S 600	450	
	155R13C		91/89	N	4.50B	D 580 S 615	450	
	165R13C		96/94	N	4.50B	D 670 S 710	450	
	175R13C	8PR	97/95	Q	5.00B	D 690 S 730	450	
14	195/50R13C		104/101	N	6.00B	D 825 S 900	650	
	185R14C	8PR	102/100	R	5 1/2J	D 800 S 850	450	
15	185R14C		102/100	N	5 1/2J	D 800 S 850	450	
	195/70R15C	8PR	104/102	R	6J	D 850 S 900	450	
	215/70R15C	8PR	109/107	R	6 1/2J	D 975 S 1030	450	
16	225/70R15C	8PR	112/110	R	6 1/2J	D 1060 S 1120	450	
	185/75R16C	8PR	104/102	R	5J	D 850 S 900	475	
	195/75R16C	8PR	107/105	R	5 1/2J	D 925 S 975	475	
	205/65R16C	8PR	107/105	R	6J	D 925 S 975	475	
	215/65R16C	8PR	109/107	R	6 1/2J	D 975 S 1030	475	
	205/75R16C	8PR	110/108	R	5 1/2J	D 1000 S 1060	475	
	215/75R16C	10PR	116/114	R	6J	D 1180 S 1250	525	
	225/65R16C	8PR	112/110	R	6 1/2J	D 1060 S 1120	475	
	225/75R16C	10PR	121/120	R	6J	D 1400 S 1450	575	
	235/65R16C	10PR	121/119	R	7J	D 1360 S 1450	575	
	17	215/60R17C	8PR	109/107	R	6 1/2J	D 975 S 1030	475
		235/60R17C	10PR	117/115	Q	7J	D 1215 S 1285	525



## GREEN-Max Winter Ice I-15 SUV

### OUTSTANDING HANDLING PERFORMANCE

- Directional grooves design for evacuate snow and mud;
- Complex soft tread compound and 3D sipes technology to promote handling performance in ice and snow conditions.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
15	205/70R15	96	T	6j	710	300
	215/75R15	100	T	6j	800	300
	235/75R15	105	T	6 1/2j	925	300
16	215/65R16	98	T	6 1/2j	750	300
	225/60R16	98	T	6 1/2j	750	300
	235/70R16	106	T	7j	950	300
	245/70R16	107	H	7j	975	300
	275/70R16	114	T	8j	1180	300
17	215/60R17	96	T	6 1/2j	710	300
	225/60R17	99	T	6 1/2j	775	300
	225/65R17	102	T	6 1/2j	850	300
	225/65R17 XL	106	T	6 1/2j	950	340
	235/55R17	99	T	7 1/2j	775	300
	235/65R17 XL	108	T	7j	1000	340
	235/50R17	96	T	7 1/2j	710	300
	245/45R17	95	T	8j	690	300
	245/65R17	107	T	7j	975	300
	255/45R17	98	T	8 1/2j	750	300
	255/60R17	106	T	7 1/2j	950	300
	265/65R17	112	T	8j	1120	300
	275/65R17	115	T	8j	1215	300
18	225/50R18	95	T	7j	690	300
	225/55R18	98	T	7j	750	300
	225/60R18	100	T	6 1/2j	800	300
	235/50R18	97	T	7 1/2j	730	300
	235/55R18	100	T	7 1/2j	800	300
	235/60R18	103	T	7j	875	300
	235/60R18 XL	107	T	7j	975	340
	235/65R18	106	T	7j	950	300
	245/40R18	93	T	8 1/2j	650	300
	245/45R18	96	T	8j	710	300
	245/50R18	100	T	7 1/2j	800	300
	245/60R18	105	T	7j	925	300
	255/40R18	95	T	9j	690	300
	255/45R18	99	T	8 1/2j	775	300
	255/55R18	105	T	8j	925	300
255/60R18 XL	112	H	7 1/2j	1120	340	
265/60R18	110	T	8j	1060	300	
285/60R18	116	T	8 1/2j	1250	300	
19	225/55R19	99	T	7j	775	300
	235/50R19	99	T	7 1/2j	775	300
	235/55R19 XL	105	H	7 1/2j	925	340
	245/40R19 XL	98	S	8 1/2j	750	340
	245/45R19	98	T	8j	750	300
	245/55R19	103	T	7 1/2j	875	300
	255/40R19	96	T	9j	710	300
	255/45R19	100	T	8 1/2j	800	300
	255/50R19	103	T	8j	875	300
	255/55R19	107	T	8j	975	300
	265/50R19	106	T	8 1/2j	950	300
	275/35R19	96	T	9 1/2j	710	300
	275/40R19	101	T	9 1/2j	825	300
275/55R19	111	T	8 1/2j	1090	300	
285/45R19	107	T	9 1/2j	975	300	

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
20	245/40R20	95	T	8 1/2j	690	300
	245/45R20	99	T	8j	775	300
	245/50R20	102	T	7 1/2j	850	300
	255/45R20	101	T	8 1/2j	825	300
	255/50R20 XL	109	H	8j	1030	340
	255/55R20 XL	110	T	8j	1060	340
	265/45R20	104	T	9j	900	300
	265/50R20	107	T	8 1/2j	975	300
	275/40R20	102	T	9 1/2j	850	300
	275/45R20 XL	110	T	9j	1060	340
	275/55R20	113	T	8 1/2j	1150	300
	285/35R20	100	T	10j	800	300
	285/45R20	108	T	9 1/2j	1000	300
	285/50R20	112	T	9j	1120	300
	315/35R20	106	T	11j	950	300
21	265/45R21	104	T	9j	900	300
	275/45R21	107	T	9j	975	300
	275/50R21 XL	113	T	8 1/2j	1150	340
	285/45R21	109	T	9 1/2j	1030	300
	295/40R21	107	T	10 1/2j	975	300

M+S



## GREEN-Max Winter Ice I-16

### EXCELLENT SNOW HANDLING AND ICE BRAKING&ACCELERATION

- Outstanding grip and traction performance on ice and snow surface;
- Better braking and acceleration property.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kpa)
12	145/70R12	69	T	4.50B	325	300
13	165/70R13	79	T	5.00B	437	300
	175/70R13	82	T	5.00B	475	300
14	165/60R14	75	T	5j	387	300
	165/70R14	81	T	5j	462	300
	175/70R14	84	T	5j	500	300
	185/60R14	82	T	5 1/2j	475	300
	185/65R14	86	T	5 1/2j	530	300
	185/70R14	88	T	5 1/2j	560	300
	195/60R14	86	T	6j	530	300
215/75R14	100	T	6j	800	300	
15	175/65R15	84	T	5j	500	300
	185/55R15	82	T	6j	475	300
	185/60R15	84	T	5 1/2j	500	300
	185/65R15	88	T	5 1/2j	560	300
	195/55R15	85	T	6j	515	300
	195/60R15	88	T	6j	560	300
	195/65R15	91	T	6j	615	300
205/65R15	94	T	6j	670	300	
16	195/60R16	89	S	6j	580	300
	205/55R16 XL	94	T	6 1/2j	670	340
16	205/60R16	92	T	6j	630	300
	215/50R17	91	T	7j	615	300
17	215/55R17	94	T	7j	670	300
	225/45R18	91	T	7 1/2j	615	300
18	235/45R18	94	T	8j	670	300
	225/45R19	92	T	7 1/2j	630	300

M+S

# LONG HAUL



## ETS200

RADIAL TRUCK TIRE  
(FOR INTERNATIONAL LONG-DISTANCE TRANSPORTATION)

- Suitable for steer axle of trucks running with high speed on highway.
- Low rolling resistance, reducing fuel consumption.
- Lasting grip and stability by hidden groove design.
- New pattern design improves mileage for long-distance transportation.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
315/80R22.5	22	158/150(154/150)	L(M)	9.00	3350	900	4250	900	1076	312	12.5	ETRTO
315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	12.5	ETRTO
315/80R22.5	20	157/154	L	9.00	3750	900	4125	900	1076	312	12.5	GB
315/80R22.5	18	154/151	M	9.00	3450	830	3750	830	1076	312	12.5	GB
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	12.5	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	12.5	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	12.5	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	12.5	GB
275/80R22.5	18	149/146	M	8.25	3000	850	3250	850	1012	276	12.5	ETRTO
275/80R22.5	18	149/146	M	8.25	3000	900	3250	900	1012	276	12.5	GB
275/80R22.5	16	147/144	M	8.25	2800	830	3075	830	1012	276	12.5	GB
275/80R22.5	16	145/143	M	8.25	2725	750	2900	750	1012	276	12.5	ETRTO
275/80R22.5	16	146/143	M	8.25	2725	830	3000	830	1012	276	12.5	TRA
275/70R22.5	18	150/148	M	8.25	3150	900	3350	900	958	276	12.5	ETRTO
275/70R22.5	18	146/143	M	8.25	2725	900	3000	900	958	276	12.5	GB
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	12.5	ETRTO
275/70R22.5	16	144/141	M	8.25	2575	830	2800	830	958	276	12.5	GB
255/70R22.5	16	140/137	M	7.50	2300	800	2500	800	930	255	12.5	ETRTO
255/70R22.5	16	140/137	M	7.50	2300	830	2500	830	930	255	12.5	GB/TRA
255/70R22.5	14	136/133	M	7.50	2060	700	2240	700	930	255	12.5	ETRTO
255/70R22.5	14	138/134	M	7.50	2120	760	2360	760	930	255	12.5	GB/TRA
315/60R22.5	18	154/150(152/148)	L(M)	9.75	3350	900	3750	900	950	313	15.0	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	15.0	ETRTO
315/60R22.5	20	153/150	K	9.75	3350	900	3650	900	950	313	15.0	GB
315/60R22.5	18	151/148	K	9.75	3150	830	3450	830	950	313	15.0	GB
295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	15.5	ETRTO
295/60R22.5	16	148/145	L	9.00	2900	830	3150	830	926	292	15.5	GB



# LLD76

RADIAL TRUCK TIRE

- Suitable for the drive axle of the trucks running on highway.
- Good braking and grip on wet road.
- Construction optimized for long service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1058	279	20.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1058	279	20.0	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1109	279	20.0	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1109	279	20.0	TRA



# ETD100

RADIAL TRUCK TIRE (FOR INTERNATIONAL LONG-DISTANCE TRANSPORTATION)

- Suitable for drive axle of trucks running with high speed on highway.
- Low rolling resistance reduces fuel consumption.
- Lasting grip and stability by hidden groove design with M+S and 3PMSF marking.
- New pattern design improves mileage for long distance transportation.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	17.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	16.0	ETRTO
315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	16.5	ETRTO
315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	16.5	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	16.5	ETRTO
295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	16	ETRTO



# ETS100

RADIAL TRUCK TIRE (FOR INTERNATIONAL LONG-DISTANCE TRANSPORTATION)

- Suitable for steer axle of trucks running with high speed on highway.
- Low rolling resistance, reducing fuel consumption.
- Lasting grip and stability by hidden groove design.
- New pattern design improves mileage for long-distance transportation.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	15.0	ETRTO
315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	15.0	ETRTO
315/80R22.5	22	158/150(154/150)	L(M)	9.00	3350	900	4250	900	1076	312	15.0	ETRTO
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	14.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.0	ETRTO
315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	15.0	ETRTO
315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	15.0	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	14.5	ETRTO
315/60R22.5	18	154/150(152/148)	L(M)	9.75	3350	900	3750	900	950	313	14.5	ETRTO
295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	13.0	ETRTO



# LFE891

RADIAL TRUCK TIRE (Long haul steer)

- Maximize tread volume for long original life and lower tread wear cost per mile.
- Equalizer ribs absorb irregular wear, promoting uniform rib wear and higher removal mileage.
- Micro sipes protect against irregular wear.
- Strong carcass materials.
- Help to promote tire durability and provide tire retreadability.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1014	298	16.5	TRA
295/75R22.5	16	146/143	L	9.00	2725	830	3000	830	1014	298	16.5	TRA



# LDE892

RADIAL TRUCK TIRE

- Suitable for the drive axle of the trucks running on highway.
- Good braking and grip on wet road.
- Long life, low rolling resistance.
- Optimize the footprint for even wear and long tread life.
- Strong carcass materials.
- Help to promote tire durability and provide tire retreadability.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	22.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	22.0	TRA
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1116	279	22.0	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1116	279	22.0	TRA
295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1026	298	22.0	TRA
295/75R22.5	16	146/143	L	9.00	2725	830	3000	830	1026	298	22.0	TRA
285/75R24.5	14	144/141	L	8.25	2575	760	2800	760	1062	283	22.0	TRA
285/75R24.5	16	147/144	L	8.25	2800	830	3075	830	1062	283	22.0	TRA



# ETT100

RADIAL TRUCK TIRE  
(For international long-distance transportation)

- Suitable for trailer axle of trucks running with high speed on highway.
- Low rolling resistance reduces fuel consumption.
- Lasting grip and stability by hidden groove design.
- New pattern design improves mileage for long-distance transportation.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kg	kPa	kPa				
385/55R19.5	18	156	J	12.25	--	--	4000	900	919	386	12.5	ETRTO
385/55R22.5	18	158	L	12.25	--	--	4250	850	996	386	12.0	ETRTO
385/55R22.5	20	160(158)	K(L)	12.25	--	--	4500	900	996	386	12.0	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	--	--	4500	900	1072	389	13.5	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	--	--	5000	900	1072	389	13.5	ETRTO
425/65R22.5	18	162	K	12.25	--	--	4750	760	1124	422	14.5	TRA
425/65R22.5	20	164	K	12.25	--	--	5000	830	1124	422	14.5	GB
425/65R22.5	20	165	K	12.25	--	--	5150	830	1124	422	14.5	TRA
425/65R22.5	20	165	K	12.25	--	--	5150	825	1124	422	14.5	ETRTO
435/50R19.5	18	156	J	14.00	--	--	4000	850	931	438	12.5	ETRTO
435/50R19.5	20	160	J	14.00	--	--	4500	900	931	438	12.5	ETRTO
445/45R19.5	18	156	J	15.00	--	--	4000	900	895	446	12.5	ETRTO
445/45R19.5	20	160	J	15.00	--	--	4500	900	895	446	12.5	ETRTO



# KTD10

RADIAL TRUCK TIRE

- Suitable for the drive axle of the trucks running on highway.
- Low rolling resistance reduces fuel consumption.
- Closed shoulder to fight irregular wear.
- New pattern design improves mileage for long-distance transportation.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	23.8	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	23.8	TRA
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1116	279	23.8	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1116	279	23.8	TRA
295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1026	298	22.2	TRA
295/75R22.5	16	146/143	L	9.00	2725	830	3000	830	1026	298	22.2	TRA
285/75R24.5	14	144/141	L	8.25	2575	760	2800	760	1062	283	22.2	TRA
285/75R24.5	16	147/144	L	8.25	2800	830	3075	830	1062	283	22.2	TRA



# LDL817

RADIAL TRUCK TIRE (Long haul drive)

- Typical block pattern design makes good towing and grip on wet and dry road.
- Low fuel consumption.
- Wear-resistance compound reduces shifting to prevent uneven wear.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
445/50R22.5	18	158	L	14.00	---	---	4250	760	1018	445	20.0	TRA
445/50R22.5	20	161	L	14.00	---	---	4625	830	1018	445	20.0	TRA
445/50R22.5	18	155	L	14.00	---	---	3875	700	1018	445	20.0	ETRTO
445/50R22.5	20	161	L	14.00	---	---	4625	850	1018	445	20.0	ETRTO



# LTL811

RADIAL TRUCK TIRE

- Suitable for the trailer axle of trucks running on highway.
- Low fuel consumption.
  - Wear-resistance compound reduces shifting to prevent uneven wear.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
445/50R22.5	18	158	L	14.00	---	---	4250	760	1018	445	10.5	TRA
445/50R22.5	20	161	L	14.00	---	---	4625	830	1018	445	10.5	TRA
445/50R22.5	18	155	L	14.00	---	---	3875	700	1018	445	10.5	ETRTO
445/50R22.5	20	161	L	14.00	---	---	4625	850	1018	445	10.5	ETRTO



# LDE803

RADIAL TRUCK TIRE

- Suitable for the drive axle of the trucks running on highway.
- Low fuel consumption.
  - Good braking and grip on wet road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	20.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	18.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	18.5	ETRTO



# LFE805

RADIAL TRUCK TIRE (Long haul steer)

- S-shaped groove bottom reduces stone retention.
- Good handling and high-speed performance.
- Low fuel consumption.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	15.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	15.0	GB
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	15.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	15.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	15.0	ETRTO



# LLF16

RADIAL TRUCK TIRE

- Suitable for the steer axle of the trucks running on highway.
- Good handling.
  - Long life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA



# LLD37

RADIAL TRUCK TIRE

- Suitable for the drive axle of the trucks running on highway.
- Good braking and grip on wet road.
- Long life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1065	279	22.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1065	279	22.0	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1116	279	22.0	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1116	279	22.0	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1026	298	22.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1026	298	22.0	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1062	283	22.0	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1062	283	22.0	TRA



# LLF02

Radial Truck Tire

- Suitable for the steer axle of the trucks running on highway.
- Stable and safe when running on wet and slippery road.
- Low fuel consumption.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	14.5	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.5	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	14.5	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.5	ETRTO



# LTE821

RADIAL TRUCK TIRE (LONG HAUL TRAILER)

- Excellent straight running performance.
- Sipes in shoulder offer low noise and good heat dissipation.
- Low fuel consumption.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	9.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	9.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	9.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	9.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	10.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	10.0	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	9.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	9.5	TRA



# LLD01

RADIAL TRUCK TIRE

- Suitable for the drive axle of the trucks running on highway.
- Good grip and high-speed performance.
- Low fuel consumption.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	20.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	19.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	19.5	ETRTO



# T820

RADIAL TRUCK TIRE

- Suitable for the trailer axle of the trucks running on highway.
- Low fuel consumption.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/55R19.5	18	156	J	12.25	---	---	4000	900	919	386	12.5	ETRTO
435/50R19.5	18	156	J	14.00	---	---	4000	850	931	438	12.5	ETRTO
435/50R19.5	20	160	J	14.00	---	---	4500	900	931	438	12.5	ETRTO
445/45R19.5	18	156	J	15.00	---	---	4000	900	895	446	15.5	ETRTO
445/45R19.5	20	160	J	15.00	---	---	4500	900	895	446	15.5	ETRTO



# LLF16e+

RADIAL TRUCK TIRE (Long haul steer)

- Good handling.
- Low fuel consumption.
- Certified by U.S.A SmartWay.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA



# T830

RADIAL TRUCK TIRE

- Suitable for the trailer axle of the trucks running on highway.
- Low fuel consumption.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/55R22.5	18	158	L	12.25	---	---	4250	850	996	386	15.5	ETRTO
385/55R22.5	20	160	J	12.25	---	---	4500	900	996	386	15.5	ETRTO



# LLD37e+

RADIAL TRUCK TIRE

- Suitable for the drive axle of the trucks running on highway.
- Good braking and grip on wet road.
- Long life.
- Low fuel consumption.
- Certified by U.S.A SmartWay.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1065	279	17.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1065	279	17.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1116	279	22.0	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1116	279	22.0	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1026	298	22.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1026	298	22.0	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1062	283	22.0	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1062	283	22.0	TRA

# REGIONAL



## KTA303

RADIAL TRUCK TIRE(FOR NATIONAL AND REGIONAL TRANSPORTATION )

Suitable for all position axle of trucks running under a wide range of use, from highway to light unpaved road.

- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with stone rejection design.
- HAT technology low heat generation.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	14.5	GB
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	14.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	14.5	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	14.5	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	15.5	GB
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	14.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	14.0	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	15.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	15.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.0	ETRTO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	14.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.0	ETRTO
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	12.5	ETRTO
265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	12.5	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	12.5	ETRTO
385/65R22.5	18	158	K	11.75	—	—	4250	850	1072	389	16.0	ETRTO
385/65R22.5	20	160	K	11.75	—	—	4500	900	1072	389	16.0	ETRTO



# KTD303

RADIAL TRUCK TIRE(FOR NATIONAL AND REGIONAL TRANSPORTATION )

- Suitable for drive axle of trucks running under a wide range of use, from highway to light unpaved road.
- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with M+S.
- HAT technology: low heat generation.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	17.5	GB
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	17.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	17.5	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	17.5	GB
12R22.5	16	152/148	M	9.00	3150	850	3550	850	1084	300	19.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	19.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	17.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	18.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	18.0	ETRTO
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	14.5	ETRTO
265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	14.5	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	14.5	ETRTO



# KLS200

RADIAL TRUCK TIRE (REGIONAL STEER)

- Long life.
- Retreadability.
- Low eccentric wear.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	13.5	ETRTO
265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	13.5	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	13.5	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	13.5	ETRTO
285/70R19.5	20	150/148	J	8.25	3150	900	3350	900	895	283	13.5	ETRTO
305/70R19.5	16	144/141	M	9.00	2575	760	2800	760	923	305	12.0	TRA
305/70R19.5	18	146/143	M	9.00	2725	830	3000	830	923	305	12.0	TRA
305/70R19.5	18	148/145	M	9.00(8.25)	2900	850	3150	850	923	305	12.0	ETRTO



# LDL161

RADIAL TRUCK TIRE

- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	20.0	GB



# KLD200

RADIAL TRUCK TIRE

- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	15.5	ETRTO
265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	15.5	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	16.0	ETRTO
305/70R19.5	16	144/141	M	9.00	2575	760	2800	760	923	305	13.5	TRA
305/70R19.5	18	146/143	M	9.00	2725	830	3000	830	923	305	13.5	TRA
305/70R19.5	18	148/145	M	9.00(8.25)	2900	850	3150	850	923	305	13.5	ETRTO



# KTD101

RADIAL TRUCK TIRE (FOR NATIONAL AND REGIONAL TRANSPORTATION )

Suitable for the drive axle of trucks running on highway, national road and general road

- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with M+S marking.
- High wear resistance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	22.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	22.0	GB
295/80R22.5	18	154/149	K	9.00	3250	850	3750	850	1044	298	23.0	ETRTO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	23.0	GB
295/80R22.5	16	152/148	L	9.00	3150	850	3550	850	1044	298	23.0	ETRTO
295/80R22.5	16	150/147	L	9.00	3075	830	3350	830	1044	298	23.0	GB



# KTS300

RADIAL TRUCK TIRE (FOR NATIONAL AND REGIONAL TRANSPORTATION )

Suitable for the steer axle of trucks running under a wide range of use, from highway to light unpaved road.

- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with stone rejection design.
- High wear resistance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16.5	TRA
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	16.5	TRA
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	16.5	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.5	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	15.5	ETRTO
315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	15.5	ETRTO
315/80R22.5	20	157/154	L	9.00	3750	900	4125	900	1076	312	15.5	TRA
315/80R22.5	22	158/150(154/150)	L(M)	9.00	3350	900	4250	900	1076	312	15.5	ETRTO
315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	15.5	ETRTO
315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	15.5	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	12.5	ETRTO
315/60R22.5	18	154/150(152/148)	L(M)	9.75	3350	900	3750	900	950	313	12.5	ETRTO
295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	14.0	ETRTO
385/55R22.5	18	158	L	12.25	--	--	4250	850	996	386	13.5	ETRTO
385/55R22.5	20	160(158)	K(L)	12.25	--	--	4500	900	996	386	13.5	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	--	--	4500	900	1072	389	15.5	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	--	--	5000	900	1072	389	15.5	ETRTO



# KTD200

RADIAL TRUCK TIRE (FOR NATIONAL AND REGIONAL TRANSPORTATION )

Suitable for the drive axle of trucks running on highway, national road and general road

- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with M+S and 3PMSF marking.
- High wear resistance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	22.0	ETRTO
315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	22.0	ETRTO
315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	19.5	ETRTO



# KTD300

RADIAL TRUCK TIRE (FOR NATIONAL AND REGIONAL TRANSPORTATION)

- Suitable for the drive axle of trucks running under a wide range of use, from highway to light unpaved road
- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with M+S and 3PMSF marking.
- High wear resistance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	22.0	TRA
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	22.0	TRA
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	22.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	22.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	20.5	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	20.5	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	22.0	ETRTO
315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	22.0	ETRTO
315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	20.0	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	17.5	ETRTO
295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	18.0	ETRTO



# KTD301

RADIAL TRUCK TIRE

- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	22.5	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	22.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1065	279	22.5	ETTRO
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1116	279	22.5	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1116	279	22.5	TRA



# KTA20

RADIAL TRUCK TIRE

- Suitable for all position of trucks using for high traction and high scrub applications.
- Wide and strong shoulder ribs increase tread life.
- Lasting grip and stability.
- High wear resistance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	15.1	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	15.1	TRA
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1104	279	15.1	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1104	279	15.1	TRA
295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1014	298	15.1	TRA
295/75R22.5	16	146/143	L	9.00	2725	830	3000	830	1014	298	15.1	TRA
285/75R24.5	14	144/141	L	8.25	2575	760	2800	760	1050	283	15.1	TRA
285/75R24.5	16	147/144	L	8.25	2800	830	3075	830	1050	283	15.1	TRA



# LFL185

RADIAL TRUCK TIRE (REGIONAL STEER)

- Optimization of the shoulder and the proportion of pattern block in the middle.
- Four straight groove matching S type variable angle groove design and ensure good steering tire and self-cleaning properties.
- Ultra strong skeleton materials applications and promote tire safety performance.
- High wear resistance of new formula application and wear mileage increases more than 20%.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	16.5	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	17.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	17.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	17.0	ETRTO



# LFL177

RADIAL TRUCK TIRE (REGIONAL STEER)

- Optimization of the shoulder and the proportion of pattern block in the middle.
- Four straight groove matching S type variable angle groove design and ensure good steering tire and self-cleaning properties.
- Ultra strong skeleton materials applications and promote tire safety performance.
- High wear resistance of new formula application and wear mileage increases more than 20%.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	16.5	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	17.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	17.0	ETRTO



# LTL863

RADIAL TRUCK TIRE (REGIONAL TRAILER)

- Typical combined pattern design offers optimal trailer performance.
- Low rolling resistance.
- Wear-resistance compound reduces shifting to prevent uneven wear.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/65R22.5	18	158	L	11.75	---	---	4250	850	1072	389	16.5	ETRTO
385/65R22.5	20	160(158)	J(L)	11.75	---	---	4500	900	1072	389	16.5	ETRTO
385/65R22.5	24	164	J	11.75	---	---	5000	900	1072	389	16.5	ETRTO
425/65R22.5	18	162	K	12.25	---	---	4750	760	1124	422	17.5	TRA
425/65R22.5	20	165	J/K	12.25	---	---	5150	825	1124	422	17.5	ETRTO
445/65R22.5	20	168	J/K	13.00	---	---	5600	830	1150	444	18.0	TRA
445/65R22.5	20	169	J	13.00	---	---	5800	900	1150	444	18.0	ETRTO
385/55R22.5	18	158	L	12.25	---	---	4250	850	996	386	16.5	ETRTO
385/55R22.5	20	160(158)	J(L)	12.25	---	---	4500	900	996	386	16.5	ETRTO



# LDL186

RADIAL TRUCK TIRE (REGIONAL DRIVE)

- Optimization of the shoulder and the proportion of pattern block in the middle.
- Classic mahjong block pattern style matching variable angle groove design and ensure a strong drive and self-cleaning.
- Ultra strong skeleton materials applications and promote tire safety performance.
- High wear resistance of new formula application and wear mileage increases more than 20%.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	22.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	22.0	GB
295/80R22.5	16	152/148	L	9.00	3150	850	3550	850	1044	298	23.0	ETRTO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	23.0	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	23.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	23.0	ETRTO



# LDL813

RADIAL TRUCK TIRE (REGIONAL DRIVE)

- Long life.
- Good grip performance.
- Retreadability.
- Low eccentric wear.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1059	279	20.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1059	279	20.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	20.0	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	21.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	21.0	GB
13R22.5	18	156/150	L	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	21.0	ETRTO



# LTL812

RADIAL TRUCK TIRE (REGIONAL STEER)

- Long life.
- Retreadability.
- Low eccentric wear.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	17.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	17.0	GB
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	17.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB
295/80R22.5	18	154/149	L	9.00	3250	850	3750	850	1044	298	17.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	17.0	ETRTO
285/70R19.5	16	140/137	M	8.25	2300	725	2500	725	895	283	16.0	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	16.0	ETRTO
285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	16.0	ETRTO
315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	17.0	ETRTO
315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	17.0	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	17.0	ETRTO
315/60R22.5	18	154/150(152/148)	L(M)	9.75	3350	900	3750	900	950	313	17.0	ETRTO



# LDL831

RADIAL TRUCK TIRE (REGIONAL DRIVE)

- Typical block pattern design makes good grip performance.
- High wear resistance and long life.
- Retreadability.
- Low eccentric wear.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	22.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	22.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	22.0	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	23.0	ETRTO
12R22.5	18	152/149	M	9.00	3250	930	3550	930	1085	300	23.0	GB
295/80R22.5	16	152/148	L	9.00	3150	850	3550	850	1044	298	23.0	ETRTO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	23.0	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	23.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	23.0	ETRTO
285/70R19.5	16	140/137	M	8.25	2300	725	2500	725	895	283	19.0	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	19.0	ETRTO
285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	19.0	ETRTO
315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	23.0	ETRTO
315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	23.0	ETRTO



# LLF01

RADIAL TRUCK TIRE

- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
275/80R22.5	16	149/146	M	8.25	3000	850	3250	850	1012	276	14.5	ETRTO
315/60R22.5	16	152/148	M	9.75	3150	900	3550	900	950	313	14.5	ETRTO
315/60R22.5	18	154/150(152/148)	L(M)	9.75	3350	900	3750	900	950	313	14.5	ETRTO
295/60R22.5	16	149/146	M	9.00	3000	900	3250	900	926	292	14.5	ETRTO



# LAL836

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

- Good handling and driving.
- Long life.
- Retreadability.
- Low eccentric wear

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	17.0	TRA
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	17.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	18.5	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	18.5	GB
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.5	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1050	279	16.5	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	18.0	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	18.0	GB
13R22.5	18	156/150	L	9.75	3350	875	4000	875	1124	320	18.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	16.0	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	18.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	18.0	ETRTO



# F805

RADIAL TRUCK TIRE

- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	14.5	ETRTO
305/70R22.5	14	150/148	L	9.00	3150	850	3350	850	1000	305	14.5	ETRTO
305/70R22.5	16	152/148	L	9.00	3150	900	3550	900	1000	305	14.5	ETRTO
315/70R22.5	14	152/148	M	9.00	3150	850	3550	850	1014	312	14.5	ETRTO
315/70R22.5	16	154/150	M	9.00	3350	900	3750	900	1014	312	14.5	ETRTO



# LLF02

RADIAL TRUCK TIRE

- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	14.5	ETRTO
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	16.5	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.5	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	14.5	GB
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	14.5	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.5	ETRTO
315/80R22.5	22	158/150(154/150)	L(M)	9.00	3350	900	4250	900	1076	312	14.5	ETRTO



# LLF06

RADIAL TRUCK TIRE

- Special design for all position of buses and steer or trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	14	141/139	L	7.0	2430	790	2575	790	1019	259	14.0	TRA
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	14.0	GB
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	14.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	14.5	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	15.5	TRA
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1050	279	14.5	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.5	ETRTO
315/80R22.5	22	158/150(154/150)	L(M)	9.00	3350	900	4250	900	1076	312	14.5	ETRTO



# F816

RADIAL TRUCK TIRE

- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	14.5	GB
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	15.5	TRA
11.00R20	16	150/147	L	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	L	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	L	8.5	3450	830	3750	830	1125	315	15.5	TRA
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1054	279	14.5	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	16.0	ETRTO
12R22.5	16	150/147	M	9.00	3075	830	3350	830	1085	300	16.0	GB
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	16.0	GB
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA



# F860

RADIAL TRUCK TIRE

- Special design for all position of buses and steer or trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kg	kPa	kPa				
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	14.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	14.5	GB
11.00R20	16	150/147	L	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	L	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	L	8.5	3450	830	3750	830	1125	315	15.5	TRA
11.00R22	16	152/149	K	8.0	3250	830	3550	830	1135	293	15	TRA
11.00R22	18	154/151	K	8.0	3450	930	3750	930	1135	293	15	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
305/75R24.5	14	152/148	L	9.00	3150	800	3550	800	1080	305	14.5	ETRTO
305/75R24.5	16	154/149	L	9.00	3250	850	3750	850	1080	305	14.5	ETRTO



# F860+

Radial truck tire

- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.
- New technology for tire to reduce the weight .

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
275/80R22.5	16	149/146	M	8.25	3000	850	3250	850	1012	276	14.0	ETTRO
275/80R22.5	18	149/146	M	8.25	3000	900	3250	900	1012	276	14.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	15.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	15.0	GB



# D905

RADIAL TRUCK TIRE

- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	20.0	ETRTO
275/80R22.5	16	149/146	M	8.25	3000	850	3250	850	1012	276	17	ETTRO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.5	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.5	GB
285/70R19.5	16	140/137	M	8.25	2300	725	2500	725	895	283	16.0	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	16.0	ETRTO
285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	16.0	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	17.5	ETRTO
315/70R22.5	14	152/148	M	9.00	3150	850	3550	850	1014	312	17.5	ETRTO
315/70R22.5	16	154/150	M	9.00	3350	900	3750	900	1014	312	17.5	ETRTO
275/80R22.5	18	149/146	M	8.25	3000	900	3250	900	1012	276	17.0	GB



# D915

RADIAL TRUCK TIRE

- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/60R22.5	16	149/146	M	9.00	3000	900	3250	900	926	292	17.5	ETRTO
315/60R22.5	16	152/148	M	9.75	3150	900	3550	900	950	313	19.5	ETRTO



# D930

RADIAL TRUCK TIRE

- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R22	16	152/149	K	8.00	3250	830	3550	830	1135	293	20	TRA
11.00R22	18	154/151	K	8.0	3450	930	3750	930	1135	293	20	GB
305/75R24.5	14	152/148	L	9.00	3150	800	3550	800	1080	305	19.5	ETRTO
305/75R24.5	16	154/149	L	9.00	3250	850	3750	850	1080	305	19.5	ETRTO



# D928

RADIAL TRUCK TIRE

- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	17.5	GB
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	20.0	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	20.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	19.5	GB
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1059	279	20.5	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1059	279	20.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1059	279	20.5	ETRTO
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1110	279	20.5	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1110	279	20.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1020	298	20.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1020	298	20.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1056	283	20.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1056	283	20.5	TRA



# D935

RADIAL TRUCK TIRE

- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	18.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	18.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.5	GB



# T810

RADIAL TRUCK TIRE

Suitable for the trailer axle of the trucks running on the high-grade road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	10.75	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	10.75	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	10.75	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	10.75	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	10.75	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	10.75	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	10.75	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	10.75	TRA
255/70R22.5	16	140/137	M	7.50	2300	830	2500	830	930	255	10.75	TRA



# LLA18

Radial truck tire

Suitable for the trailer axle of the trucks running on the high-grade road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/65R22.5	18	158	K	11.75	---	---	4250	850	1072	389	16.5	ETRTO
385/65R22.5	20	160	J	11.75	---	---	4500	900	1072	389	16.5	ETRTO



# LLD37

Radial truck tire

Suitable for the trailer axle of the trucks running on the multi road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	16.0	ETRTO



# LLA28

Radial truck tire

Suitable for the trailer axle of the trucks running on the multi road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
425/65R22.5	18	162	K	12.25	---	---	4750	760	1124	422	17.5	TRA
425/65R22.5	20	165	J/K	12.25	---	---	5150	825	1124	422	17.5	ETRTO



# F820

RADIAL TRUCK TIRE (REGIONAL ALL Position)

Suitable for all position axle of buses and medium trucks.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	13.5	ETRTO
265/70R19.5	16	140/138	L	7.50	2360	775	2500	775	867	262	13.5	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	13.5	ETRTO
285/70R19.5	16	144/142	M	8.25	2650	800	2800	800	895	283	14.0	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	14.0	ETRTO
285/70R19.5	18	150/147	J	8.25	3075	900	3350	900	895	283	14.0	ETRTO
255/70R22.5	14	136/133	M	7.50	2060	700	2240	700	930	255	14.0	ETRTO
255/70R22.5	16	140/137	M	7.50	2300	830	2500	830	930	255	14.0	TRA
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	14.5	ETRTO
275/70R22.5	18	150/148	M	8.25	3150	900	3350	900	958	276	14.5	ETRTO



# LLF26

Radial truck tire

Suitable for all position axle of medium trucks.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.50R20	12	128/126	L	6.0	1700	760	1800	760	935	215	11.5	GB
7.50R20	14	130/128	K	6.0	1800	830	1900	830	935	215	11.5	GB
8.25R20	12	133/131	L	6.5	1950	720	2060	720	974	236	12.5	GB
8.25R20	14	136/134	L	6.5	2120	830	2240	830	974	236	12.5	GB
8.25R20	16	139/137	L	6.5	2300	930	2430	930	974	236	12.5	GB



# T820

RADIAL TRUCK TIRE

Suitable for all position axle of trucks running on the high-grade road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
305/70R19.5	18	148/145	M	9.00(8.25)	2900	850	3150	850	923	305	12.0	ETRTO



# LLF76

Radial truck tire

Suitable for all position axle of buses and medium trucks.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8R22.5	12	128/126	M	6.00	1700	760	1800	760	935	203	13.0	GB
8R22.5	14	130/128	M	6.00	1800	830	1900	830	935	203	13.0	GB



# LLF56+

RADIAL TRUCK TIRE

Suitable for all position axle of buses and trucks.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9R22.5	12	133/131	M	6.75	1950	720	2060	720	974	229	13.5	TRA
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	13.5	TRA
10R22.5	14	141/139	M	7.50	2430	790	2575	790	1019	254	14.0	TRA
10R22.5	14	144/142	L	7.50	2650	850	2800	850	1019	254	14.0	ETRTO
10R22.5	16	144/142	L	7.50	2650	900	2800	900	1019	254	14.0	GB



# LAL800

RADIAL TRUCK TIRE

Suitable for all position axle of trucks running on the multi road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R20	12	133/131	L	6.5	1950	720	2060	720	974	236	12.0	GB
8.25R20	14	136/134	L	6.5	2120	830	2240	830	974	236	12.0	GB
8.25R20	16	139/137	L	6.5	2300	930	2430	930	974	236	12.0	GB
11.00R20	16	150/147	L	8.0	3075	830	3350	830	1085	293	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	GB
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	17.0	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	17.0	ETRTO
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	16.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	16.0	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	16.0	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	16.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	16.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	16.0	ETRTO



# C600

RADIAL TRUCK TIRE

Suitable for all position axle of trucks running on the high-grade road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	15	TRA
10R22.5	14	144/142	L	7.50	2650	850	2800	850	1020	254	15	ETRTO
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	16	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	16	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16	ETRTO



# D900

RADIAL TRUCK TIRE (REGIONAL DRIVE)

- New technology for tire to reduce the weight.
- Low eccentric wear.
- Low fuel consumption.
- Good braking and grip on the road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	17.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	17.5	GB



# LFL827

RADIAL TRUCK TIRE (REGIONAL STEER)

- New technology for tire to reduce the weight.
- Low eccentric wear.
- Low fuel consumption.
- Good handling.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	13.0	GB
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	13.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	14.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	13.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	13.0	ETRTO
385/65R22.5	18	158	K	11.75	—	—	4250	850	1072	389	13.0	ETRTO
385/65R22.5	20	160	J	11.75	—	—	4500	900	1072	389	13.0	ETRTO
385/65R22.5	24	164	J	11.75	—	—	5000	900	1072	389	13.0	ETRTO



# F816e+

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

- Good handling.
- Low fuel consumption.
- Certified by U.S.A SmartWay.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA





## T810e+

RADIAL TRUCK TIRE (REGIONAL TRAILER)

- Low fuel consumption.
- Certified by U.S.A SmartWay.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	10.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	10.0	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	10.75	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	10.75	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	10.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	10.0	TRA



## KTT307

RADIAL TRUCK TIRE (REGIONAL TRAILER)

- Low fuel consumption.
- HAT technology: low heat generation.
- Stone rejection design.
- New technology for tire to reduce the weight.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	14.0	ETRTO



## L-S20

RADIAL TRUCK TIRE (REGIONAL STEER)

- Long life.
- Retreadability.
- Low eccentric wear.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	13.5	ETRTO
265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	13.5	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	13.5	ETRTO
305/70R19.5	18	148/145	M	9.00	2900	850	3150	850	923	305	12	ETRTO



## L-D20

RADIAL TRUCK TIRE

- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	15.5	ETRTO
265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	15.5	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	15.5	ETRTO
305/70R19.5	18	148/145	M	9.00	2900	850	3150	850	923	305	13.5	ETRTO



## KTT306

RADIAL TRUCK TIRE (REGIONAL TRAILER)

- Low fuel consumption.
- HAT technology: low heat generation.
- Zigzag pattern design.
- New technology for tire to reduce the weight.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	14	ETRTO



## KTT308

RADIAL TRUCK TIRE (REGIONAL TRAILER)

- Low fuel consumption.
- HAT technology: low heat generation.
- Stone rejection design.
- New technology for tire to reduce the weight.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	14	ETRTO



# ON&OFF ROAD



## KMA403

RADIAL TRUCK TIRE (ON&OFF ROAD)

Suitable for all position axle of trucks under all kinds of working conditions.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- HAT technology: Low heat generation.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	14.5	GB
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	14.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	14.5	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	14.5	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	15.5	GB
12.00R20	20	156/153	J	8.5	3650	900	4000	900	1125	315	15.5	GB
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	15.5	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	15.5	ETRTO
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	15.5	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	15.5	GB
13R22.5	18	154/151	K	9.75	3450	830	3750	830	1124	320	15.5	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	15.5	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	15.0	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	15.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	15.5	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	15.5	ETRTO
385/65R22.5	24	164	G	11.75	—	—	5000	900	1072	389	16.0	ETRTO
385/65R22.5	20	160	K	11.75	—	—	4500	900	1072	389	16.0	ETRTO
385/65R22.5	18	158	K	11.75	—	—	4250	850	1072	389	16.0	ETRTO
295/80R22.5	18	154/149	K	9.00	3250	850	3750	850	1044	298	15.0	ETRTO



## M-A40A

RADIAL TRUCK TIRE (ON&OFF ROAD)

Suitable for all position axle of trucks under all kinds of working conditions.

- Anti wear and tear compound system ensures the anti-wear performance.
- Longitudinal zig-zag pattern together with the transverse sipe enhance traction performance on mixed roads.
- Pattern with high saturation ratio guarantee the wear performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
275/80R22.5	16	147/144	K	8.25	2800	830	3075	830	1012	276	14.0	GB
275/80R22.5	18	149/146	K	8.25	3000	900	3250	900	1012	276	14.0	GB
275/80R22.5	18	149/146	K	8.25	3000	850	3250	850	1012	276	14.0	ETTRO



# KMD403

RADIAL TRUCK TIRE (ON&OFF ROAD)

Suitable for drive axle of trucks under all kinds of working conditions.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- HAT technology: Low heat generation.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	19.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	19.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	20.0	GB
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	19.0	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	19.0	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	19.0	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	19.0	GB
13R22.5	18	154/151	K	9.75	3450	830	3750	830	1124	320	19.0	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	19.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	18.5	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	18.5	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	19.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	19.0	ETRTO
295/80R22.5	18	154/149	K	9.00	3250	850	3750	850	1044	298	18.5	ETRTO



# KMD406

RADIAL TRUCK TIRE (ON&OFF ROAD)

Suitable for drive axle of trucks under all kinds of working conditions.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability with M+S and 3PMSF marking.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	21.0	ETRTO



# KMA400

RADIAL TRUCK TIRE (ON&OFF ROAD)

Suitable for all position axle of trucks under all kinds of working conditions.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability with M+S and 3PMSF marking.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R20	14	136/134	K	6.5	2120	830	2240	830	974	236	15.5	GB
8.25R20	16	139/137	K	6.5	2300	930	2430	930	974	236	15.5	GB
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	16	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.5	GB
11.00R20	16	150/147	K	8.0	3075	830	6650	830	1085	293	16.5	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	17.0	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	17.0	GB
12R22.5	16	152/148	F	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	17.0	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	19.0	ETRTO
13R22.5	20	158/156	K	9.75	4000	900	4250	900	1124	320	19.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	19.0	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	19.0	GB
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	19.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	19.0	ETRTO
315/80R22.5	22	158/150	K	9.00	3350	900	4250	900	1076	312	19.0	ETRTO
425/65R22.5	20	165	K	13.0	---	---	5150	825	1124	430	18.5	ETRTO
445/65R22.5	20	169	J/K	14.0	---	---	5800	900	1150	454	18.5	ETRTO



# LLA08A

RADIAL TRUCK TIRE (ON&OFF ROAD ALL POSITION)

- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
275/80R22.5	16	147/144	K	8.25	2800	830	3075	830	1012	276	16.0	GB
275/80R22.5	18	149/146	K	8.25	3000	900	3250	900	1012	276	16.0	GB
275/80R22.5	16	149/146	K	8.25	3000	850	3250	850	1012	276	16.0	ETTRO



## KMD402

RADIAL TRUCK TIRE (ON&OFF ROAD)

- Suitable for drive axle of trucks under all kinds of working conditions.
- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	20.0	GB
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	22.5	ETRTO
315/80R22.5	20	156/150(154/150)	K	9.00	3350	850	4000	850	1076	312	22.5	ETRTO



## KMA40

RADIAL TRUCK TIRE (ON&OFF ROAD)

- Suitable for all position axle of trucks under all kinds of working conditions.
- Chip, cut and abrasion resistance tread compound.
- Stone rejection design protects groove bottom from stone puncture.
- Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	18.3	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1104	279	18.3	TRA



## KXA400

RADIAL TRUCK TIRE (ON&OFF ROAD)

- Suitable for trailer and steer axle of trucks under all kinds of working conditions.
- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability with M+S and 3PMSF marking.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/65R22.5	18	158	L	11.75	---	---	4250	850	1072	389	18.0	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	---	---	4500	900	1072	389	18.0	ETRTO
385/65R22.5	24	164	J	11.75	---	---	5000	900	1072	389	18.0	ETRTO
425/65R22.5	20	165	K	12.25	---	---	5150	825	1124	422	18.5	ETRTO



## KMD401

RADIAL TRUCK TIRE (ON&OFF ROAD)

- Suitable for drive axle of trucks under all kinds of working conditions.
- Chip, cut and abrasion resistance tread compound.
- Stone rejection design protects groove bottom from stone puncture.
- Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	20.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	20.5	ETTRO
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1104	279	22.5	TRA
295/80R22.5	16	152/148	L	9.00	3150	850	3550	850	1044	298	20.5	ETTRO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	20.5	GB



# LAR919

RADIAL TRUCK TIRE (ON&OFF ROAD ALL POSITION)

- Pattern block design reduces shoulder heat.
- Wide running surface and higher saturation design improve the wear mileage.
- Powerful traction, grip and climbing performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.50R20	12	128/126	L	6.0	1700	760	1800	760	935	215	14.5	GB
7.50R20	14	130/128	K	6.0	1800	830	1900	830	935	215	14.5	GB
8.25R20	14	136/134	K	6.5	2120	830	2240	830	974	236	15.5	GB
8.25R20	16	139/137	K	6.5	2300	930	2430	930	974	236	15.5	GB
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	16.0	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	16.0	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	16.0	GB
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1054	279	19.0	TRA
11R22.5	16	148/145	K	8.25	2900	850	3150	850	1050	279	19.0	ETRTO
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	20.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	20.0	ETRTO
315/80R22.5	22	158/150	K	9.00	3350	900	4250	900	1076	312	20.0	ETRTO
325/95R24	22	162/160	K	9.00	4500	850	4750	850	1228	325	18.0	ETRTO
12R24.5	16	152/149	K	9.00	3250	830	3550	830	1135	300	16.0	TRA
12R24.5	18	154/151	K	9.00	3450	930	3750	930	1135	300	16.0	GB



# LAR959

RADIAL TRUCK TIRE (ON&OFF ROAD ALL POSITION)

- Wide and deep tread grooves for long tire life.
- Excellent cutting and chipping resistance.
- Robust tread and high traction on rough surfaces.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R20	16	139/137	F	6.5	2300	930	2430	930	974	236	18.0	GB
9.00R20	16	144/142	D	7.0	2650	900	2800	900	1019	259	20.0	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	18.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	18.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	19.0	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	19.0	GB
325/95R24	22	162/160	K	9.00	4500	850	4750	850	1228	325	23.0	ETRTO



# LDR978

RADIAL TRUCK TIRE (ON&OFF ROAD DRIVE)

- Good traction.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	16.0	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	16.0	GB
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	20.5	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	20.5	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	21.0	ETRTO



# LLA08

RADIAL TRUCK TIRE (ON&OFF ROAD ALL POSITION)

- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.50R20	12	128/126	L	6.0	1700	760	1800	760	935	215	13.5	GB
7.50R20	14	130/128	K	6.0	1800	830	1900	830	935	215	13.5	GB
8.25R20	12	133/131	L	6.5	1950	720	2060	720	974	236	15.5	GB
8.25R20	14	136/134	L	6.5	2120	830	2240	830	974	236	15.5	GB
8.25R20	16	139/137	L	6.5	2300	930	2430	930	974	236	15.5	GB
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	15.0	TRA
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	15.0	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	15.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	15.5	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	16.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.5	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	17.0	TRA
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	17.0	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	17.0	ETRTO
11R22.5	14	144/142	K	8.25	2650	720	2800	720	1054	279	15.0	TRA
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1054	279	15.0	TRA
11R22.5	16	148/145	K	8.25	2900	850	3150	850	1054	279	15.0	ETRTO
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
11R24.5	14	146/143	K	8.25	2725	720	3000	720	1104	279	16.5	TRA
11R24.5	16	149/146	K	8.25	3000	830	3250	830	1104	279	16.5	TRA
12R24.5	16	152/149	K	9.00	3250	830	3550	830	1135	300	16.0	TRA
12R24.5	18	154/151	K	9.00	3450	930	3750	930	1135	300	16.0	GB
255/70R22.5	16	140/137	M	7.50	2300	830	2500	830	930	255	12.7	TRA
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
295/80R22.5	18	154/149	K	9.00	3250	850	3750	850	1044	298	16.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	17.0	ETRTO
315/80R22.5	22	158/150	K	9.00	3350	900	4250	900	1076	312	17.0	ETRTO



# LLA01

RADIAL TRUCK TIRE (ON&OFF ROAD ALL POSITION)

- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	15.5	TRA
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	15.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	17.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	17.5	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	17.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	17.5	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	17.5	ETRTO
13R22.5	20	158/156	K	9.75	4000	900	4250	900	1124	320	17.5	ETRTO



# LLA58

RADIAL TRUCK TIRE (ON&OFF ROAD ALL POSITION)

- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	14.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	14.5	GB
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	15.5	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	15.5	ETRTO



# LLD09

RADIAL TRUCK TIRE (ON&OFF ROAD DRIVE)

- Rigid block design for good traction.
- Cut resistance compound.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R20	12	133/131	L	6.5	1950	720	2060	720	974	236	14.5	GB
8.25R20	14	136/134	L	6.5	2120	830	2240	830	974	236	14.5	GB
8.25R20	16	139/137	L	6.5	2300	930	2430	930	974	236	14.5	GB
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	15.5	TRA
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	15.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	16.0	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	17.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	17.0	GB



# LLA38

RADIAL TRUCK TIRE (ON&OFF ROAD TRAILER)

- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/55R22.5	18	158	L	12.25	---	---	4250	850	996	386	16.5	ETRTO
385/55R22.5	20	160	J	12.25	---	---	4500	900	996	386	16.5	ETRTO
385/65R22.5	18	158	K	11.75	---	---	4250	850	1072	389	16.5	ETRTO
385/65R22.5	20	160	J	11.75	---	---	4500	900	1072	389	16.5	ETRTO
425/65R22.5	18	162	K	12.25	---	---	4750	760	1124	422	17.5	TRA
425/65R22.5	20	165	J/K	12.25	---	---	5150	825	1124	422	17.5	ETRTO
445/65R22.5	20	168	J/K	13.00	---	---	5600	830	1150	444	18.0	TRA
445/65R22.5	20	169	J	13.00	---	---	5800	900	1150	444	18.0	ETRTO



# D960

RADIAL TRUCK TIRE (ON&OFF ROAD DRIVE)

- TDeep and rigid block design for long life and good traction.
- Cut resistance compound.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	21.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	21.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	21.0	TRA
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	21.0	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	21.0	ETRTO
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	21.0	ETRTO
12R22.5	18	152/149	J	9.00	3250	930	3550	930	1085	300	21.0	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
9.5R17.5	14	129/127	K	6.75	1750	750	1850	750	842	240	16.0	ETRTO
9.5R17.5	18	143/141	K	6.75	2575	875	2725	875	842	240	16.0	ETRTO
265/70R19.5	16	140/138	K	7.50	2360	775	2500	775	867	262	15.5	ETRTO
265/70R19.5	18	143/141	K	7.50	2575	850	2725	850	867	262	15.5	ETRTO
275/70R22.5	16	148/145	K	8.25	2900	900	3150	900	958	276	21.0	ETRTO
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	22.0	ETRTO
295/80R22.5	18	152/149	F	9.00	3250	900	3550	900	1044	298	22.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	21.0	ETRTO
295/80R22.5	18	154/149	F	9.00	3250	850	3750	850	1044	298	22.0	ETRTO



## A968

RADIAL TRUCK TIRE (ON&OFF ROAD TRAILER)

- Cut resistance compound.
- Good braking and grip.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R15TR	14	137/135	L	7.50	2180	720	2300	720	927	278	17.5	TRA
10.00R15TR	16	141/139	K	7.50	2430	830	2575	830	927	278	17.5	TRA
11R17.5	14	137/135	L	8.25	2180	720	2300	720	927	279	17.5	TRA
11R17.5	16	141/139	K	8.25	2430	830	2575	830	927	279	17.5	TRA
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	17.5	TRA
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1054	279	17.5	TRA
11R22.5	16	148/145	K	8.25	2900	850	3150	850	1054	279	17.5	ETRTO
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1104	279	17.5	TRA
11R24.5	16	149/146	K	8.25	3000	830	3250	830	1104	279	17.5	TRA



## LTR968\*

RADIAL TRUCK TIRE (ON&OFF ROAD TRAILER)

- Cut resistance compound.
- Good braking and grip.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
275/70R22.5*	16	148/145	K	8.25	2900	900	3150	900	958	276	17.0	ETRTO

# OFF ROAD





# LD0986

RADIAL TRUCK TIRE(OFF ROAD DRIVE)

- Suitable for hilly area and mine etc.,off road conditions.
- Off-road pattern block ensures powerful traction and good self-cleaning ability.
  - Chip,cut and abrasion resistance tread compound.
  - Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	24.5	GB
12.00R20	20	156/153	F	8.5	3650	900	4000	900	1136	315	24.5	GB
12.00R24	20	160/156	F	8.5	4000	850	4500	850	1226	313	25.5	ETRTO
12.00R24	18	156/153	F	8.5	3650	775	4000	775	1226	313	25.5	ETRTO
12.00R24	20	160/157	F	8.5	4125	900	4500	900	1226	315	25.5	GB
12.00R24	18	158/155	F	8.5	3875	830	4250	830	1226	315	25.5	GB
11R22.5	14	144/142	F	8.25	2650	720	2800	720	1065	279	24.5	TRA
11R22.5	16	146/143	F	8.25	2725	830	3000	830	1065	279	24.5	TRA
11R22.5	16	148/145	F	8.25	2900	850	3150	850	1065	279	24.5	ETRTO
12R22.5	16	152/148	F	9.00	3150	850	3550	850	1084	300	24.5	ETRTO
12R22.5	18	152/149	F	9.00	3250	930	3550	930	1096	300	24.5	GB
13R22.5	18	156/150	F	9.75	3350	875	4000	875	1124	320	24.5	ETRTO
11R24.5	14	146/143	F	8.25	2725	720	3000	720	1116	279	24.5	TRA
11R24.5	16	149/146	F	8.25	3000	830	3250	830	1116	279	24.5	TRA
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	24.5	ETRTO
295/80R22.5	18	152/149	F	9.00	3250	900	3550	900	1050	298	24.5	GB
315/80R22.5	18	154/150	F	9.00	3350	825	3750	825	1076	312	24.5	ETRTO
315/80R22.5	20	156/150	F	9.00	3350	850	4000	850	1076	312	24.5	ETRTO



# D960+

RADIAL TRUCK TIRE(OFF ROAD DRIVE)

- Suitable for hilly area and mine etc.,off road conditions.
- Off-road pattern block ensures powerful traction and good self-cleaning ability.
  - Chip,cut and abrasion resistance tread compound.
  - Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
315/80R22.5	20	156/150	F	9.00	3350	850	4000	850	1076	312	24.9	ETRTO



# LD0983

RADIAL TRUCK TIRE(OFF ROAD DRIVE)

- Suitable for hilly area and mine etc.,off road conditions.
- Off-road pattern block ensures powerful traction and good self-cleaning ability.
  - Chip,cut and abrasion resistance tread compound.
  - Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1030	259	23.5	GB
10.00R20	18	149/146	F	7.5	3000	930	3250	930	1065	278	24.0	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1096	293	24.0	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	24.0	GB
12.00R20	20	156/153	F	8.5	3650	900	4000	900	1136	315	24.0	GB
12.00R24	18	156/153	F	8.5	3650	775	4000	775	1226	313	24.0	ETRTO
12.00R24	20	160/156	F	8.5	4000	850	4500	850	1226	313	24.0	ETRTO
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	22.0	ETRTO
295/80R22.5	18	152/149	F	9.00	3250	900	3550	900	1050	298	22.0	GB
295/80R22.5	18	154/149	F	9.00	3250	850	3750	850	1044	298	22.0	ETRTO



# LD0993

RADIAL TRUCK TIRE(OFF ROAD ALL POSITION)

- Suitable for mine,off road conditions
- Off-road pattern block ensures powerful traction and good self-cleaning ability.
  - Chip,cut and abrasion resistance tread compound.
  - Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1030	259	24.5	GB
10.00R20	18	149/146	F	7.5	3000	930	3250	930	1065	278	24.5	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1096	293	24.5	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	24.5	GB
12.00R20	20	156/153	F	8.5	3650	900	4000	900	1136	315	24.5	GB



# D969

RADIAL TRUCK TIRE(OFF ROAD ALL POSITION)

- Good traction resistance.
- Chip,cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R20	12	133/131	F	6.5	1950	720	2060	720	986	236	21.5	GB
8.25R20	14	136/134	F	6.5	2120	830	2240	830	986	236	21.5	GB
8.25R20	16	139/137	F	6.5	2300	930	2430	930	986	236	21.5	GB
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1030	259	23.5	GB
10.00R20	18	149/146	J	7.5	3000	930	3250	930	1065	278	25.5	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1096	293	25.5	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	25.5	TRA
12R22.5	18	152/149	J	9.00	3250	930	3550	930	1096	300	25.5	GB
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	20.0	ETRTO



# LD0912

RADIAL TRUCK TIRE(OFF ROAD DRIVE)

- Good traction resistance.
- Chip,cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1096	293	22.0	GB
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1050	279	20.0	ETRTO
275/80R22.5	16	149/146	J	8.25	3000	850	3250	850	1012	276	20.0	ETRTO
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	20.0	ETRTO



# D990

RADIAL TRUCK TIRE (OFF ROAD ALL POSITION)

Suitable for off road conditions.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
14.00R20	18	160/157	F	10.00W	4125	700	4500	700	1238	370	19.5	ETRTO
14.00R20	20	164/160	F	10.00W	4500	750	5000	750	1238	370	19.5	ETRTO



# LLD10

RADIAL TRUCK TIRE(OFF ROAD DRIVE)

- Good traction resistance.
- Chip,cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	14	141/139	F	7.0	2430	790	2575	790	1019	259	20.0	TRA
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1019	259	20.0	GB
10.00R20	16	146/143	J	7.5	2725	830	3000	830	1054	278	20.0	TRA
10.00R20	18	149/146	J	7.5	3000	930	3250	930	1054	278	20.0	GB
11.00R20	16	150/147	F	8.0	3075	830	3350	830	1085	293	20.0	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1085	293	20.0	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1125	315	21.0	TRA
13R22.5	18	156/150	F	9.75	3350	875	4000	875	1124	320	20.0	ETRTO



# LD0986+

RADIAL TRUCK TIRE(OFF ROAD DRIVE)

- Suitable for hilly area and mine etc.,off road conditions
- Off-road pattern block ensures powerful traction and good self-cleaning ability.
  - Chip,cut and abrasion resistance tread compound.
  - Deep tread depth and wide tread width increase mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12.00R20	22	158/155	B	8.5	3875	970	4250	970	1136	315	32.0	CAS
12.00R24	18	158/155	F	8.5	3875	830	4250	830	1238	315	32.0	GB/TRA
12.00R24	20	160/157	F	8.5	4125	900	4500	900	1238	315	32.0	GB
12.00R24	22	162/158	B	8.5	4250	900	4750	900	1238	315	32.0	—



## LDM991

RADIAL TRUCK TIRE (OFF ROAD ALL POSITION)

Suitable for off road conditions.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
14.00R20	18	160/157	F	10.00W	4125	700	4500	700	1238	370	19.5	ETRTO
14.00R20	20	164/160	F	10.00W	4500	750	5000	750	1238	370	19.5	ETRTO



## D950

RADIAL TRUCK TIRE (SHORT HAUL)

- Drive axle for on/off road conditions.
- Deep and rigid block design for good traction.
- Cut resistance compound.
- Used for logging conditions where high traction required.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	K	8.25	2650	720	2800	720	1065	279	23.0	TRA
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1065	279	23.0	TRA
11R24.5	14	146/143	F/G	8.25	2725	720	3000	720	1116	279	24.9	TRA
11R24.5	16	149/146	F/G	8.25	3000	830	3250	830	1116	279	24.9	TRA
295/75R22.5	16	146/143	J	9.00	2725	830	3000	830	1026	298	23.0	TRA
285/75R24.5	16	147/144	J	8.25	2800	830	3075	830	1062	283	23.0	TRA

# LIGHT TRUCK





# KCA651

RADIAL TRUCK TIRE (REGIONAL)

- Suitable for all position axle of light trucks
- Thick sidewall design protects against sidewall impacts and bruises.
  - Zig-zag grooves for excellent handling.
  - HAT technology: low heat generation.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	10.0	GB
7.00R16LT	14	118/114	M	5.50F	1180	770	1320	770	775	200	10.0	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	11.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	11.0	GB
8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	11.5	GB
8.25R16LT	14	126/122	M	6.50H	1500	670	1700	670	855	235	11.5	GB
8.25R16LT	16	128/124	M	6.50H	1600	770	1800	770	855	235	11.5	GB



# KMA653

RADIAL TRUCK TIRE (ON&OFF ROAD)

- Suitable for all position axle of trucks
- Thick sidewall design protects against sidewall impacts and bruises.
  - Stone rejection design protects groove bottom from stone puncture
  - HAT technology: low heat generation.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.00R16LT	12	115/110	K	5.50F	1060	670	1215	670	775	200	11.5	GB
7.00R16LT	14	118/114	K	5.50F	1180	770	1320	770	775	200	11.5	GB
7.50R16LT	12	120/116	K	6.00G	1250	670	1400	670	805	215	12.5	GB
7.50R16LT	14	122/118	K	6.00G	1320	770	1500	770	805	215	12.5	GB
8.25R16LT	12	123/119	K	6.50H	1360	560	1550	560	855	235	13.0	GB
8.25R16LT	14	126/122	K	6.50H	1500	670	1700	670	855	235	13.0	GB
8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	855	235	13.0	GB



# KMA652

RADIAL TRUCK TIRE (ON&OFF ROAD)

- Suitable for all position axle of light trucks
- Thick sidewall design protects against sidewall impacts and bruises.
  - Stone rejection design protects groove bottom from stone puncture.
  - HAT technology: low heat generation.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.00R16LT	12	115/110	K	5.50F	1060	670	1215	670	775	200	10.0	GB
7.00R16LT	14	118/114	K	5.50F	1180	770	1320	770	775	200	10.0	GB
7.50R16LT	12	120/116	K	6.00G	1250	670	1400	670	805	215	11.0	GB
7.50R16LT	14	122/118	K	6.00G	1320	770	1500	770	805	215	11.0	GB
8.25R16LT	12	123/119	K	6.50H	1360	560	1550	560	855	235	11.5	GB
8.25R16LT	14	126/122	K	6.50H	1500	670	1700	670	855	235	11.5	GB
8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	855	235	11.5	GB



# KLD200

RADIAL TRUCK TIRE (REGIONAL DRIVE)

Suitable for medium trucks running on the high-grade road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	12.5	ETRTO
225/75R17.5	12	126/125	M	6.75	1650	675	1700	675	783	226	13.5	ETRTO
225/75R17.5	14	129/127	M	6.75	1750	725	1850	725	783	226	13.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	13.5	ETRTO
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	14.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	14.5	ETRTO
245/70R19.5	12	129/127	M	7.50	1750	660	1850	660	839	248	14.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	14.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	14.5	ETRTO
245/70R19.5	16	136/134	M	7.50	2120	825	2240	825	839	248	14.5	ETRTO



# KLS200

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

Suitable for medium trucks running on the high-grade road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	11.5	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	11.5	ETRTO
225/75R17.5	12	126/125	M	6.75	1650	675	1700	675	783	226	12.5	ETRTO
225/75R17.5	14	129/127	M	6.75	1750	725	1850	725	783	226	12.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	12.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	12.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	12.5	ETRTO
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	12.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	12.5	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	12.5	ETRTO
245/70R19.5	12	129/127	M	7.50	1750	660	1850	660	839	248	12.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	12.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	12.5	ETRTO
245/70R19.5	16	136/134	M	7.50	2120	825	2240	825	839	248	12.5	ETRTO



# KLT200

RADIAL TRUCK TIRE (REGIONAL TRAILER)

Suitable for medium trucks running on the high-grade road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
205/65R17.5	16	129/127(132/132)	J(G)	6.00	1750	900	1850	900	711	205	13	ETRTO
215/75R17.5	14	125/122	L	6.00	1500	760	1650	760	767	211	12.5	GB
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	12.5	ETRTO
215/75R17.5	16	127/124	J	6.00	1600	830	1750	830	767	211	12.5	GB
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	12.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	12.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	12.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	12.5	ETRTO
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	12.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	12.5	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	12.5	ETRTO



# KTD23

RADIAL TRUCK TIRE (REGIONAL DRIVE)

Suitable for drive axle of trucks using for high traction and high scrub applications.

- Horizontal pattern provides tire excellent drive and braking performance.
- Shoulder pattern groove and open pattern design with good tire heat dissipation.
- Pattern block stiffener effectively restrains grinding block root tear and decorative pattern.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
215/75R17.5	16	135/133	L	6.00	2060	850	2180	850	767	211	15.0	ETRTO
225/70R19.5	12	125/123	L	6.75	1550	660	1650	660	811	226	15.8	TRA
225/70R19.5	14	128/126	L	6.75	1700	760	1800	760	811	226	15.8	TRA
245/70R19.5	14	133/131	L	7.50	1950	760	2060	760	839	248	15.8	TRA
245/70R19.5	16	135/133	L	7.50	2060	830	2180	830	839	248	15.8	TRA



# KJT016

RADIAL TRUCK TIRE (REGIONAL DRIVE)

Regional Haul Application / Pickup & Delivery Service Drive.

- Aggressive zigzag center grooves and open shoulder grooves provide outstanding traction in mud and snow.
- Stone rejectors protect the casing in base of the tread groove.
- Protect ribs on both sidewalls to fight damage from curbing, cuts and abrasions.
- 3D SIPS locks together under compression for the stability of a solid block.
- Strong carcass materials help promote tire durability and provide tire retreadability.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	15.0	TRA
225/70R19.5	14	128/126	N	6.75	1700	760	1800	760	811	226	15.0	TRA



# LFL866

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

- Extra wide tread design for high mileage and even wear.
- Zig-zag grooves for excellent handling.
- Optimize structure design.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.00R13LT	8	93/89	L	4.50B	580	460	650	460	655	170	10.0	GB
6.00R14LT	8	95/90	L	4.1/2J	600	460	690	460	680	170	10.0	GB
6.00R15LT	8	97/92	L	4.50E	630	460	730	460	705	170	10.5	GB
7.50R15LT	8	110/105	L	6.00G	925	460	1060	460	780	215	13.0	GB
7.50R15LT	10	115/110	L	6.00G	1060	560	1215	560	780	215	13.0	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	12.0	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	13.0	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	13.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.0	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	14.0	GB
205/65R17.5	16	129/127(132/132)	J(G)	6.00	1750	900	1850	900	711	204	12.5	ETRTO
215/70R17.5	14	123/121	L	6.00	1550	775	1450	775	747	211	14.5	JATMA
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	14.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	14.5	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	14.5	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	14.5	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	14.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	14.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	14.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.5	ETRTO
225/80R17.5	14	123/122	L	6.75	1500	700	1550	700	805	226	16.0	JATMA
225/90R17.5	14	127/125	L	6.75	1650	700	1750	700	851	226	13.0	JATMA
225/90R17.5	16	128/126	L	6.75	1700	700	1800	700	851	226	13.0	JATMA



# LDL831

RADIAL TRUCK TIRE (REGIONAL DRIVE)

- Typical block pattern design makes good towing and grip on wet and dry road.
- Strong wear resistance and long life.
- Retreadability.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	18.0	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	18.0	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	18.0	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	16.0	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	16.0	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	17.0	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	17.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	17.0	ETRTO



# KTA303

RADIAL TRUCK TIRE (FOR NATIONAL AND REGIONAL TRANSPORTATION)

Suitable for all position axle of trucks running under a wide range of use, from highway to light unpaved road

- Optimization of the shoulder block improves resistance to shoulder damage
- Lasting grip and stability, with stone rejection design
- HAT technology: low heat generation

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.5R17.5	14	129/127	M	6.75	1750	750	1850	750	842	240	11.5	ETRTO
9.5R17.5	18	143/141	M/J	6.75	2575	875	2725	875	842	240	11.5	ETRTO
215/75R17.5	14	126/124	L	6.00	1600	700	1700	700	767	211	12.0	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	12.0	ETRTO
235/75R17.5	14	132/130	L	6.75	1900	775	2000	775	797	233	12.5	ETRTO
235/75R17.5	16	141/140	L	6.75	2500	850	2575	850	797	233	12.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	12.5	ETRTO



# LAR919

RADIAL TRUCK TIRE (ON&OFF ROAD ALL POSITION)

- Pattern block design reduces shoulder heat.
- Wide running surface and higher saturation design improve the wear mileage.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.00R14LT	8	95/90	K	4.1/2J	600	460	690	460	680	170	10.0	GB
6.00R15LT	8	97/92	K	4.50E	630	460	730	460	705	170	10.5	GB
6.50R16LT	12	110/105	K	5.50F	925	670	1060	670	750	185	12.0	GB
7.00R16LT	14	118/114	K	5.50F	1180	770	1320	770	775	200	14.0	GB
7.50R16LT	14	122/118	K	6.00G	1320	770	1500	770	805	215	15.0	GB
8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	855	235	16.0	GB



# LAR959

RADIAL TRUCK TIRE (ON&OFF ROAD ALL POSITION)

- Wide and deep tread grooves for long tire life.
- Excellent cutting and chipping resistance.
- Robust tread and high traction on rough surfaces.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.00R13LT	8	93/89	F	4.50B	580	460	650	460	655	170	12.5	GB
6.00R14LT	8	95/90	F	4 1/2J	600	460	690	460	680	170	12.5	GB
6.00R15LT	8	97/92	F	4.50E	630	460	730	460	705	170	12.5	GB
6.50R16LT	12	110/105	F	5.50F	925	670	1060	670	750	185	13.5	GB
7.00R16LT	14	118/114	F	5.50F	1180	770	1320	770	783	200	17.0	GB
7.50R16LT	14	122/118	F	6.00G	1320	770	1500	770	815	215	18.0	GB
8.25R16LT	16	128/124	D	6.50H	1600	770	1800	770	865	235	18.0	GB
9.00R16LT	16	134/129	D	6.50H	1850	770	2120	770	900	255	18.0	GB



# F830

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

Suitable for small trucks running on the high-grade road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	10.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	10.5	GB



# KTD303

RADIAL TRUCK TIRE(FOR NATIONAL AND REGIONAL TRANSPORTATION )

Suitable for drive axle of trucks running under a wide range of use, from highway to light unpaved road

- Optimization of the shoulder block improves resistance to shouder damage
- Lasting grip and stability with M+S
- HAT technology: low heat generation

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.5R17.5	14	129/127	L	6.75	1750	750	1850	750	842	240	14.5	ETRTO
9.5R17.5	18	143/141	L	6.75	2575	875	2725	875	842	240	14.5	ETRTO
215/75R17.5	14	126/124	L	6.00	1600	700	1700	700	767	211	14.0	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	14.0	ETRTO
235/75R17.5	14	132/130	L	6.75	1900	775	2000	775	797	233	14.5	ETRTO
235/75R17.5	16	141/140	L	6.75	2500	850	2575	850	797	233	14.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.5	ETRTO



# LLF26

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

Suitable for medium trucks running on the high-grade road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R15TR	12	126/124	M	6.50	1600	720	1700	720	847	236	12.5	TRA
8.25R15TR	14	129/127	L	6.50	1750	830	1850	830	847	236	12.5	TRA
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	11.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	11.5	GB
8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	12.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	12.5	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	12.5	GB
8.5R17.5	12	121/120	M	6.00	1400	625	1450	625	802	215	12.5	ETRTO
9.5R17.5	14	129/127	M	6.75	1750	750	1850	750	842	240	12.0	ETRTO
9.5R17.5	18	143/141	M/J	6.75	2575	875	2725	875	842	240	12.0	ETRTO
8R19.5	12	124/122	M	6.00	1500	760	1600	760	859	203	12.5	TRA



# LLF86

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

Suitable for medium trucks running on the high-grade road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
215/75R17.5	14	126/124	L/M	6.00	1600	700	1700	700	767	211	12.5	ETRTO
215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	211	12.5	ETRTO



# F820

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

Suitable for medium trucks running on the high-grade road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.5R17.5	12	121/120	M	6.00	1400	625	1450	625	802	215	13.0	ETRTO
205/75R17.5	14	124/122	M	6.00	1500	750	1600	750	753	204	12.5	ETRTO
215/75R17.5	12	124/123	M	6.00	1550	675	1600	675	767	211	12.5	ETRTO
215/75R17.5	14	126/124	L/M	6.00	1600	700	1700	700	767	211	12.5	ETRTO
215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	211	12.5	ETRTO
235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	13.0	ETRTO
235/75R17.5	16	141/140	L	6.75	2500	850	2575	850	797	233	13.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	13.0	ETRTO
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	12.5	TRA
225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	12.5	TRA
245/70R19.5	16	135/133	M	7.50	2060	830	2180	830	839	248	13.0	TRA
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	13.0	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	13.0	ETRTO
245/70R19.5	16	136/134	L/M	7.50	2120	825	2240	825	839	248	13.0	ETRTO



# D905

RADIAL TRUCK TIRE (REGIONAL DRIVE)

- Suitable for medium trucks running on the high-grade road .
- Good braking and grip on wet road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
245/70R17.5	18	143/141	L	7.50	2575	875	2725	875	789	248	18.0	ETRTO
225/70R19.5	12	125/123	L	6.75	1550	660	1650	660	811	226	15.0	GB
225/70R19.5	14	128/126	L	6.75	1700	760	1800	760	811	226	15.0	GB
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	16.0	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	16.0	ETRTO
245/70R19.5	16	136/134	M	7.50	2120	825	2240	825	839	248	16.0	ETRTO
215/75R17.5	12	124/123	M	6.00	1550	675	1600	675	767	211	15.0	ETRTO
215/75R17.5	14	126/124	L/M	6.00	1600	700	1700	700	767	211	15.0	ETRTO
215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	211	15.0	ETRTO
235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	15.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	15.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	15.5	ETRTO
245/70R19.5	16	135/133	M	7.50	2060	830	2180	830	839	248	16.0	TRA



# LAM903

RADIAL TRUCK TIRE (ON&OFF ROAD ALL POSITION)

- Suitable for medium trucks running on on/off road.
- High traction.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.50R16LT	8	112/107	L/M	6.00G	975	460	1120	460	805	215	9.5	GB



# LLA78

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

Suitable for medium trucks running on the high-grade road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	12.0	ETRTO
235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	13.0	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	13.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	13.0	ETRTO



# D955

RADIAL TRUCK TIRE (ON&OFF ROAD DRIVE)

- Suitable for medium trucks running on the normal road.
- Good braking and grip on wet road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	12.5	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	14.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	14.5	GB
8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	15.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	15.5	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	15.5	GB
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	14.5	TRA
225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	14.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	15.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	15.5	ETRTO
245/70R19.5	16	136/134	L	7.50	2120	825	2240	825	839	248	15.5	ETRTO
245/70R19.5	16	135/133	M	7.50	2060	830	2180	830	839	248	15.5	TRA



# LLA08

RADIAL TRUCK TIRE (ON&OFF ROAD ALL POSITION)

- Suitable for medium trucks running on the normal road.
- Typical combined pattern.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	10.5	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	10.5	GB
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	11.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	11.5	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	12.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	12.5	GB
8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	13.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	13.5	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	13.5	GB
9.00R16LT	14	131/126	L	6.50H	1700	670	1950	670	890	255	14.5	GB
9.00R16LT	16	134/129	L	6.50H	1850	770	2120	770	890	255	14.5	GB



# D969

RADIAL TRUCK TIRE (OFF ROAD ALL POSITION)

- Good traction resistance.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.00R16LT	12	115/110	F	5.50F	1060	670	1215	670	775	200	15.5	GB
7.00R16LT	14	118/114	F	5.50F	1180	770	1320	770	775	200	15.5	GB
7.50R16LT	12	120/116	F	6.00G	1250	670	1400	670	815	215	17.5	GB
7.50R16LT	14	122/118	F	6.00G	1320	770	1500	770	815	215	17.5	GB
8.25R16LT	12	123/119	F	6.50H	1360	560	1550	560	865	235	17.5	GB
8.25R16LT	14	126/122	F	6.50H	1500	670	1700	670	865	235	17.5	GB
8.25R16LT	16	128/124	F	6.50H	1600	770	1800	770	865	235	17.5	GB



# LD0993

RADIAL TRUCK TIRE (OFF ROAD ALL POSITION)

- Off-road pattern block ensures powerful traction and good self-cleaning ability.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.50R16LT	12	110/105	F	5.50F	925	670	1060	670	750	185	13.5	GB
7.00R16LT	14	118/114	F	5.50F	1180	770	1320	770	775	200	14.5	GB
7.50R16LT	14	122/118	F	6.00G	1320	770	1500	770	815	215	16.5	GB
8.25R16LT	16	128/124	F	6.50H	1600	770	1800	770	865	235	18.0	GB



# LLD09

RADIAL TRUCK TIRE (ON&OFF ROAD DRIVE)

- Suitable for medium trucks running on the normal road.
- Typical combined pattern.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	12.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	12.5	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	13.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.5	GB
8.25R16LT	12	123/119	L	6.50H	1360	560	1550	560	855	235	14.5	GB
8.25R16LT	14	126/122	K	6.50H	1500	670	1700	670	855	235	14.5	GB
8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	855	235	14.5	GB
215/75R17.5	12	124/123	K	6.00	1550	675	1600	675	767	211	14.0	ETRTO
215/75R17.5	14	126/124	K	6.00	1600	700	1700	700	767	211	14.0	ETRTO
215/75R17.5	16	128/126	K	6.00	1700	750	1800	750	767	211	14.0	ETRTO
215/75R17.5	16	135/133	K	6.00	2060	850	2180	850	767	211	14.0	ETRTO
235/75R17.5	14	132/130	K	6.75	1900	775	2000	775	797	233	15.0	ETRTO
235/75R17.5	16	141/140	K	6.75	2500	850	2575	850	797	233	15.0	ETRTO
235/75R17.5	18	143/141	K	6.75	2575	875	2725	875	797	233	15.0	ETRTO
225/80R17.5	14	123/122	K	6.75	1500	700	1550	700	805	226	15.0	JATMA



# F835

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

Suitable for small trucks running on the high-grade road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
LT225/75R16	12	119/116	N	6.00	1250	650	1360	650	744	223	11.1	TRA
LT245/75R16	12	123/120	N	7.00	1400	650	1550	650	774	248	11.1	TRA
ST235/80R16	14	129/125	M	6 1/2J	1650	760	1850	760	780	235	8.9	TRA
ST235/85R16	14	132/127	L	6 1/2J	1750	760	2000	760	806	235	8.9	TRA



# LAL867

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

Suitable for small trucks running on the high-grade road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
195/85R16LT	12	114/112	L	5 1/2J	1120	600	1180	600	738	196	10.0	JATMA
205/85R16LT	12	117/115	L	5 1/2J	1215	600	1285	600	754	203	10.0	JATMA



# LAL812

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

Suitable for small trucks running on the high-grade road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
195/85R16LT	12	114/112	L	5 1/2J	1120	600	1180	600	738	196	10.0	JATMA
205/85R16LT	12	117/115	L	5 1/2J	1215	600	1285	600	754	203	10.0	JATMA



# LAL815

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

- Extra wide tread design for high mileage and even wear.
- Zig-zag grooves for excellent handling.
- Optimize structure design.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
225/80R17.5	14	123/122	L	6.75	1500	700	1550	700	805	226	15.0	JATMA



# L-S20

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

Suitable for medium trucks running on the high-grade road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
205/75R17.5	14	124/122	M	6.00	1500	750	1600	750	753	205	10.5	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	11.5	ETRTO
225/75R17.5	12	126/125	M	6.75	1650	675	1700	675	783	226	11.5	ETRTO
225/75R17.5	14	129/127	M	6.75	1750	725	1850	725	783	226	11.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	12.5	ETRTO
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	12.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	12.5	ETRTO
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	12.5	ETRTO
245/70R19.5	16	136/134	M	7.50	2120	825	2240	825	839	248	12.5	ETRTO
245/70R19.5	18	141/140	J	7.50	2500	850	2575	850	839	248	12.5	ETRTO
265/70R17.5	16	140/138	M	7.50	2360	800	2500	800	817	262	13.5	ETRTO
265/70R17.5	18	145/143	J	7.50	2725	900	2900	900	817	262	13.5	ETRTO



# L-T20

RADIAL TRUCK TIRE (REGIONAL TRAILER)

Suitable for medium trucks running on the high-grade road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
205/65R17.5	16	129/127(132/132)	J(G)	6	1750	900	1850	900	711	205	12.5	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	12.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	12.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	12.5	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	900	2725	900	789	248	12.5	ETRTO



# L-D20

RADIAL TRUCK TIRE (REGIONAL DRIVE)

Suitable for medium trucks running on the high-grade road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
205/75R17.5	14	124/122	M	6.00	1500	750	1600	750	753	205	11.5	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	12.5	ETRTO
225/75R17.5	12	126/125	M	6.75	1650	675	1700	675	783	226	12.5	ETRTO
225/75R17.5	14	129/127	M	6.75	1750	725	1850	725	783	226	12.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	13.5	ETRTO
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	14.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	14.5	ETRTO
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	14.5	ETRTO
245/70R19.5	16	136/134	M	7.50	2120	825	2240	825	839	248	14.5	ETRTO
265/70R17.5	16	140/138	M	7.50	2360	800	2500	800	817	262	15.5	ETRTO



# COACH&URBAN



## LDU610

RADIAL BUS TIRE (URBAN DRIVE)

- Enhanced sidewall ensures high safety.
- Tire strength is increased by 35%,with application of ST steel cord.
- Tire bead cracking is prevented,with application fiber layer in bead area.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	146/143	J	8.25	2725	830	3000	830	1054	279	21.5	TRA
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1050	279	21.5	ETRTO



## LAU609

RADIAL BUS TIRE (URBAN ALL POSITION)

- Enhanced sidewall ensures high safety.
- Tire strength is increased by 35%,with application of ST steel cord.
- Tire bead cracking is prevented,with application fiber layer in bead area.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
305/70R22.5	20	152/150 (154/150)	J(F)	9.00	3350	900	3550	900	1000	305	21.0	ETRTO
275/70R22.5	16	148/145	J	8.25	2900	900	3150	900	958	276	21	ETRTO
275/70R22.5	16	148/145 (152/148)	J(E)	8.25	2900	900	3150	900	958	276	21.0	ETRTO
275/70R22.5	18	150/148(152/148)	J(F)	8.25	3150	900	3350	900	958	276	21.0	ETRTO
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1050	279	21.0	ETRTO
245/70R19.5	12	129/127	J	7.50	1850	660	1750	660	839	248	16.0	TRA
245/70R19.5	14	133/131	J	7.50	2060	760	1950	760	839	248	16.0	TRA
245/70R19.5	14	133/131	J	7.50	2060	750	1950	750	839	248	16.0	ETRTO
245/70R19.5	16	135/133	J	7.50	2180	830	2060	830	839	248	16.0	TRA
245/70R19.5	16	136/134	J	7.50	2240	825	2120	825	839	248	16.0	ETRTO



# LAU608

RADIAL BUS TIRE (COACH ALL POSITION)

- Enhanced sidewall ensures high safety.
- Tire strength is increased by 35%,with application of ST steel cord.
- Good wet traction.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	17.0	ETRTO



# LFL866

RADIAL BUS TIRE (SMALL BUS ALL POSITION)

- Extra wide tread designs for high mileage and even wear.
- Zig-zag grooves for excellent handling.
- Optimize structure design.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.00R15LT	8	97/92	L	4.50E	630	460	730	460	705	170	10.5	GB
7.50R15LT	8	110/105	L	6.00G	925	460	1060	460	780	215	13.0	GB
7.50R15LT	10	115/110	L	6.00G	1060	560	1215	560	780	215	13.0	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	12.0	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	13.0	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	13.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.0	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	14.0	GB
8R22.5	14	130/128	M	6.00	1800	830	1900	830	935	203	14.0	GB
215/70R17.5	14	123/121	L	6.00	1550	775	1450	775	747	211	14.5	JATMA
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	14.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	14.5	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	14.5	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	14.5	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	14.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	14.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	14.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.5	ETRTO
225/80R17.5	14	123/122	L	6.75	1500	700	1550	700	805	226	16.0	JATMA
225/90R17.5	14	127/125	L	6.75	1650	700	1750	700	851	226	13.0	JATMA
225/90R17.5	16	128/126	L	6.75	1700	700	1800	700	851	226	13.0	JATMA



# LTL812

RADIAL BUS TIRE (COACH ALL POSITION)

- Suitable for all axle of buses riding on highway.
- Long life.
- Good grip performance.
- Low eccentric wear.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	15.0	TRA
10R22.5	14	141/139	M	7.50	2430	790	2575	790	1019	254	15.0	TRA
10R22.5	14	144/142	L	7.50	2650	850	2800	850	1020	254	15.0	ETRTO
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.0	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1050	279	16.0	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	16.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB



# LAU802

RADIAL BUS TIRE (URBAN ALL POSITION)

- Enhanced sidewall ensures high safety.
- Long service life.
- Typical used for urban bus

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	146/143	F	8.25	2725	830	3000	830	1054	279	20.0	TRA
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1050	279	20.0	ETRTO
255/70R22.5	16	140/137	J	7.50	2300	800	2500	800	930	255	19.0	ETRTO
275/70R22.5	16	148/145 (152/148)	J(E)	8.25	2900	900	3150	900	958	276	19.5	ETRTO
305/70R22.5	16	152/148(154/150)	J(E)	9.00	3150	900	3550	900	1000	305	20.0	ETRTO
295/80R22.5	16	152/148(154/150)	J(E)	9.00	3150	850	3550	850	1044	298	20.0	ETRTO
295/80R22.5	18	152/149	J	9.00	3250	900	3550	900	1044	298	20.0	GB

# WINTER



## KWD700

RADIAL TRUCK TIRE ON ICE AND SNOW

- Long Haul Application Drive
- 3D Kerf technology provides excellent traction and long original tread life;
- Wide tread design and combined structure of rib and block pattern provides stability, longer mileage, and better handling performance in all weather conditions;
- Long life, low rolling resistance;
- Optimizes the footprint for even wear and long tread life;
- Strong carcass materials help promote tire durability and provide tire retreadability.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	21.5	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1116	279	21.5	TRA



## KWD600

RADIAL TRUCK TIRE ON ICE AND SNOW

- Suitable for drive axle of trucks under snow condition.
- Lasting grip and stability, with M+S and 3PMSF marking.
- Optimized rib contact combats uneven wear and improves wet handling and braking.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	20.5	ETRTO
315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	20.0	ETRTO
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	22.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	22.0	ETRTO



# LFW806

RADIAL TRUCK TIRE ON ICE AND SNOW (ALL POSITION)

- High safety and good handling.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Low noise.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	11.0	GB
6.50R16LT	12	110/105	M	5.50F	925	670	1060	670	750	185	11.0	GB
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	11.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	11.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	12.0	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	12.5	GB
11R22.5	16	146/143	M	8.25	2725	800	3000	800	1054	279	15.0	JATMA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	15.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	15.0	ETRTO
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	15.0	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	15.0	TRA
385/65R22.5	20	160(158)	J(L)	11.75	--	--	4500	900	1072	389	16.5	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	15.0	ETRTO
275/70R22.5	16	144/141	M	8.25	2575	830	2800	830	958	276	15.0	GB
315/70R22.5	16	154/150	L	9.00	3350	900	3750	900	1014	312	15.0	ETRTO
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1026	298	15.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1026	298	15.0	TRA
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	15.0	ETRTO
295/80R22.5	16	150/147	K	9.00	3075	830	3350	830	1044	298	15.0	GB
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	15.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	15.0	ETRTO



# AS-A10

RADIAL TRUCK TIRE ON ICE AND SNOW (ALL POSITION)

- High safety and good handling, with M+S and All Season marking.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Long life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
245/70R19.5	16	136/134	J	7.50	2120	850	2240	850	839	248	18.5	JATMA



# LDW807

RADIAL TRUCK TIRE ON ICE AND SNOW (DRIVE)

- High safety and good handling.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Long life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	11.0	GB
6.50R16LT	12	110/105	M	5.50F	925	670	1060	670	750	185	11.0	GB
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	11.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	11.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	14.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	15.5	GB
11R22.5	16	146/143	M	8.25	2725	800	3000	800	1054	279	20.0	JATMA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	20.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	20.0	ETRTO
315/70R22.5	16	154/150	L	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	20.0	ETRTO
295/80R22.5	16	150/147	K	9.00	3075	830	3350	830	1044	298	20.0	GB
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	20.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	20.0	ETRTO



# KWT600

- For trailer axle of trucks under snow condition use only.
- Lasting grip and stability, with M+S and 3PMSF marking.
- Optimized rib contact combats uneven wear and improves wet handling and braking.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/55R22.5	18	158	L	12.25	--	--	4250	850	996	386	14.5	ETRTO
385/55R22.5	20	160(158)	K(L)	12.25	--	--	4500	900	996	386	14.5	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	--	--	4500	900	1072	389	15.5	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	--	--	5000	900	1072	389	15.5	ETRTO