

Roadstone pays
deep consideration
to your safety and

**Driving
Pleasure**

PATTERN GUIDE

PERFORMANCE
like no other



ROADSTONE



About ROADSTONE

ROADSTONE is an associated brand produced by NEXEN TIRE Corporation, a global tire manufacturer headquartered in the Republic of Korea.

Our company, one of the world's fastest growing tire manufacturers, currently interacts with approximately 150 countries around the world and owns four manufacturing plants – two in Korea (Yangsan and Changnyeong) and one in Qingdao, China. Another plant in Žatec, the Czech Republic has also begun operation in 2019. Moreover, we are building a global R&D network in China, the US and Germany with the Central Research Institute in the Republic of Korea serving as the central hub and developing innovative products of the future that will lead the global market by reinforcing its technological competitiveness.



ROADSTONE history

1942	1956	1984	1987-1991	2008	2012	2018	2019	2019
Established Heung-a Tire Industry	Produced vehicle tires for the first time in the Republic of Korea after the Korean war	Began construction of radial tire plant for mass production in the Republic of Korea	Established joint venture with Michelin for technical and production cooperation	Started operation of Qingdao Plant in China	Started operation of Changnyeong Plant in the Republic of Korea	Opened new R&D Center in Germany and the US	Established the NEXEN Central Research Institute in the Republic of Korea	Started operation of Europe Plant in the Czech Republic



Passenger Car Radial

EUROVIS Sport 04 06

N'FERA SU1 12

N8000 16

EUROVIS HP 02 20

N5000 Plus 24

CP672 28


N'Priz 4S 32

ROADS TO NEW



EUROVIS Sport 04

SPORT ULTRA HIGH PERFORMANCE

4 Wide longitudinal grooves -
Improved drainage performanceHigh stiffness ribs -
Enhanced driving stabilityClaw shaped groove - Improved
traction performance in wetLarge shoulder block -
Enhanced handling performance**BENEFITS**


SPORT



PC / FULL-SIZE



PC / MID-SIZE

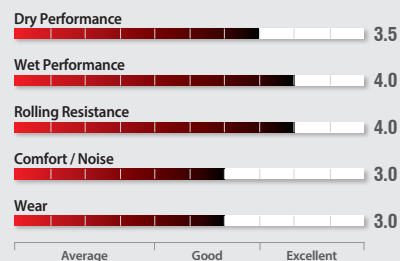**EXCELLENT
DRY PERFORMANCE****EXCELLENT
WET PERFORMANCE****IMPROVED
FUEL CONSUMPTION****KEY PERFORMANCE INDICATORS****EUROVIS Sport 04**

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.	SLR	S/W	UTQG	E	M+S
				kgs	lbs			mm	inch	mm	inch	mm /32"					
20 inch																	
255/35ZR20	97 Y XL	15784	50	730	1609	9.0	8.5~10.0	260	10.2	686	27.0	7.5 9.4/32	324	BS	320/A/A	E	
245/45ZR20	103 Y XL	15796	50	875	1929	8.0	7.5~9.0	243	9.6	728	28.7	7.5 9.4/32	340	BS	320/A/A	E	
19 inch																	
* 275/35ZR19	100W XL	10068	50	800	1764	9.5	9.0~11.0	278	10.9	675	26.6	7.5 9.4/32	316	BS	320/A/A	E	
255/35ZR19	96W XL	14520	50	710	1565	9.0	8.5~10.0	260	10.2	661	26.0	7.5 9.4/32	311	BS	320/A/A	E	
255/35ZR19	96 Y XL	16429	50	710	1565	9.0	8.5~10.0	260	10.2	661	26.0	7.5 9.4/32	311	BS	320/A/A	E	
245/35ZR19	93 Y XL	15791	50	650	1433	8.5	8.0~9.5	248	9.8	655	25.8	7.5 9.4/32	309	BS	320/A/A	E	
235/35ZR19	91 Y XL	15793	50	615	1356	8.5	8.0~9.5	241	9.5	647	25.5	7.5 9.4/32	306	BS	320/A/A	E	
255/40ZR19	100 Y XL	15786	50	800	1764	9.0	8.5~10.0	260	10.2	687	27.0	7.5 9.4/32	322	BS	320/A/A	E	
* 245/40ZR19	98W XL	10060	50	750	1653	8.5	8.0~9.5	248	9.8	679	26.7	7.5 9.4/32	318	BS	320/A/A	E	
* 235/40ZR19	96W XL	10076	50	710	1565	8.5	8.0~9.5	241	9.5	671	26.4	7.5 9.4/32	315	BS	320/A/A	E	
* 245/45ZR19	102W XL	10066	50	850	1874	8.0	7.5~9.0	243	9.6	703	27.7	7.5 9.4/32	327	BS	320/A/A	E	
225/45ZR19	96W XL	14571	50	710	1565	7.5	7.0~8.5	225	8.9	685	27.0	7.5 9.4/32	321	BS	320/A/A	E	
18 inch																	
255/35ZR18	94W XL	14519	50	670	1477	9.0	8.5~10.0	260	10.2	635	25.0	7.5 9.4/32	298	BS	320/A/A	E	
255/35ZR18	94 Y XL	16430	50	670	1477	9.0	8.5~10.0	260	10.2	635	25.0	7.5 9.4/32	298	BS	320/A/A	E	
215/35ZR18	84 Y XL	15783	50	500	1102	7.5	7.0~8.5	218	8.6	607	23.9	7.5 9.4/32	288	BS	320/A/A	E	
* 255/40ZR18	99W XL	10086	50	775	1709	9.0	8.5~10.0	260	10.2	661	26.0	7.5 9.4/32	308	BS	320/A/A	E	
245/40ZR18	97W XL	14523	50	730	1609	8.5	8.0~9.5	248	9.8	653	25.7	7.5 9.4/32	306	BS	320/A/A	E	
245/40ZR18	97 Y XL	16436	50	730	1609	8.5	8.0~9.5	248	9.8	653	25.7	7.5 9.4/32	306	BS	320/A/A	E	
235/40ZR18	95W XL	14522	50	690	1521	8.5	8.0~9.5	241	9.5	645	25.4	7.5 9.4/32	302	BS	320/A/A	E	
235/40ZR18	95 Y XL	16437	50	690	1521	8.5	8.0~9.5	241	9.5	645	25.4	7.5 9.4/32	302	BS	320/A/A	E	
225/40ZR18	92W XL	14521	50	630	1389	8.0	7.5~9.0	230	9.1	637	25.1	7.5 9.4/32	299	BS	320/A/A	E	
225/40ZR18	92 Y XL	16431	49	630	1389	8.0	7.5~9.0	230	9.1	637	25.1	7.5 9.4/32	299	BS	320/A/A	E	
255/45ZR18	103W XL	14569	50	875	1929	8.5	8.0~9.5	255	10.0	687	27.0	7.5 9.4/32	319	BS	320/A/A	E	
255/45ZR18	103 Y XL	16438	50	875	1929	8.5	8.0~9.5	255	10.0	687	27.0	7.5 9.4/32	319	BS	320/A/A	E	
245/45ZR18	100W XL	14531	50	800	1764	8.0	7.5~9.0	243	9.6	677	26.7	7.5 9.4/32	315	BS	320/A/A	E	
245/45ZR18	100 Y XL	16432	50	800	1764	8.0	7.5~9.0	243	9.6	677	26.7	7.5 9.4/32	315	BS	320/A/A	E	
225/45ZR18	95 Y XL	15787	50	690	1521	7.5	7.0~8.5	225	8.9	659	25.9	7.5 9.4/32	308	BS	320/A/A	E	
215/45ZR18	93W XL	14570	50	650	1433	7.0	7.0~8.0	213	8.4	651	25.6	7.5 9.4/32	305	BS	320/A/A	E	
* 225/50ZR18	99W XL	10075	50	775	1709	7.0	6.0~8.0	233	9.2	683	26.9	7.5 9.4/32	317	BS	320/A/A	E	
* 215/50ZR18	96W XL	10087	50	710	1565	7.0	6.0~7.5	226	8.9	673	26.5	7.5 9.4/32	313	BS	320/A/A	E	



* Available from the 1st Quarter of 2022

* Our company is entitled to make any change on any information in this catalogue, without further notice.

* All figures are for reference; our company is not responsible for printing errors.

EUROVIS Sport 04

SPORT ULTRA HIGH PERFORMANCE

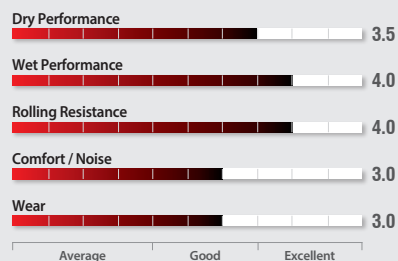4 Wide longitudinal grooves -
Improved drainage performanceHigh stiffness ribs -
Enhanced driving stabilityClaw shaped groove - Improved
traction performance in wetLarge shoulder block -
Enhanced handling performance**BENEFITS****EXCELLENT
DRY PERFORMANCE****EXCELLENT
WET PERFORMANCE****IMPROVED
FUEL CONSUMPTION****KEY PERFORMANCE INDICATORS****EUROVIS Sport 04**

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.		SLR	S/W	UTQG	E	M+S
				kgs	lbs	Range	mm	inch	mm	inch	mm	/32"						
17 inch																		
245/40ZR17	95 Y XL	15792	50	690	1521	8.5	8.0~9.5	248	9.8	628	24.7	7.5	9.4/32	293	BS	320/A/A	E	
215/40ZR17	87W XL	15785	50	545	1201	7.5	7.0~8.5	218	8.6	604	23.8	7.5	9.4/32	284	BS	320/A/A	E	
205/40ZR17	84W XL	14524	50	500	1102	7.5	7.0~8.0	212	8.3	596	23.5	7.5	9.4/32	280	BS	320/A/A	E	
245/45ZR17	99W XL	15788	50	775	1709	8.0	7.5~9.0	243	9.6	652	25.7	7.5	9.4/32	302	BS	320/A/A	E	
235/45ZR17	97W XL	14530	50	730	1609	8.0	7.5~9.0	236	9.3	644	25.4	7.5	9.4/32	299	BS	320/A/A	E	
235/45ZR17	97 Y XL	16433	50	730	1609	8.0	7.5~9.0	236	9.3	644	25.4	7.5	9.4/32	299	BS	320/A/A	E	
225/45ZR17	94W XL	14528	50	670	1477	7.5	7.0~8.5	225	8.9	634	25.0	7.5	9.4/32	295	BS	320/A/A	E	
225/45ZR17	94 Y XL	16434	50	670	1477	7.5	7.0~8.5	225	8.9	634	25.0	7.5	9.4/32	295	BS	320/A/A	E	
225/45ZR17	91 Y	18540	51	615	1356	7.5	7.0~8.5	225	8.9	634	25.0	7.5	9.4/32	295	BS	320/A/A	E	
215/45ZR17	91W XL	14527	50	615	1356	7.0	7.0~8.0	213	8.4	626	24.6	7.5	9.4/32	292	BS	320/A/A	E	
205/45ZR17	88W XL	14526	50	560	1235	7.0	6.5~7.5	206	8.1	616	24.3	7.5	9.4/32	288	BS	320/A/A	E	
225/50ZR17	98W XL	14538	50	750	1653	7.0	6.0~8.0	233	9.2	658	25.9	7.5	9.4/32	305	BS	320/A/A	E	
225/50ZR17	98 Y XL	16435	50	750	1653	7.0	6.0~8.0	233	9.2	658	25.9	7.5	9.4/32	305	BS	320/A/A	E	
225/50ZR17	98W XL	18342	50	750	1653	7.0	6.0~8.0	233	9.2	658	25.9	7.5	9.4/32	305	BS	320/A/A	E	
215/50ZR17	91W	14537	51	615	1356	7.0	6.0~7.5	226	8.9	648	25.5	7.5	9.4/32	301	BS	320/A/A	E	
215/50ZR17	95W XL	15684	50	690	1521	7.0	6.0~7.5	226	8.9	648	25.5	7.5	9.4/32	301	BS	320/A/A	E	
205/50ZR17	93W XL	14536	50	650	1433	6.5	5.5~7.5	214	8.4	638	25.1	7.5	9.4/32	297	BS	320/A/A	E	
235/55ZR17	103W XL	15790	50	875	1929	7.5	6.5~8.5	245	9.6	690	27.2	7.5	9.4/32	317	BS	320/A/A	E	
225/55ZR17	101W XL	14549	50	825	1819	7.0	6.0~8.0	233	9.2	680	26.8	7.5	9.4/32	313	BS	320/A/A	E	
215/55ZR17	94W	14547	51	670	1477	7.0	6.0~7.5	226	8.9	668	26.3	7.5	9.4/32	309	BS	320/A/A	E	
205/55ZR17	95 Y XL	15789	50	690	1521	6.5	5.5~7.5	214	8.4	658	25.9	7.4	9.3/32	305	BS	320/A/A	E	

16 inch

205/45ZR16	87W XL	15795	50	545	1201	7.0	6.5~7.5	206	8.1	590	23.2	7.5 9.4/32	275	BS	320/A/A	E	
195/45R16	84 V XL	14525	50	500	1102	6.5	6.0~7.5	195	7.7	582	22.9	7.5 9.4/32	272	BS	320/A/A	E	
205/50ZR16	87W	14535	51	545	1201	6.5	5.5~7.5	214	8.4	612	24.1	7.5 9.4/32	283	BS	320/A/A	E	
195/50R16	84 V	14534	51	500	1102	6.0	5.5~7.0	201	7.9	602	23.7	7.5 9.4/32	279	BS	320/A/A	E	
225/55ZR16	95W	14548	51	690	1521	7.0	6.0~8.0	233	9.2	654	25.7	7.5 9.4/32	300	BS	320/A/A	E	
225/55ZR16	99W XL	15774	50	775	1709	7.0	6.0~8.0	233	9.2	654	25.7	7.5 9.4/32	300	BS	320/A/A	E	
215/55R16	93 V	14544	51	650	1433	7.0	6.0~7.5	226	8.9	642	25.3	7.5 9.4/32	295	BS	320/A/A	E	
215/55ZR16	97W XL	14545	50	730	1609	7.0	6.0~7.5	226	8.9	642	25.3	7.5 9.4/32	295	BS	320/A/A	E	
205/55R16	91 H	14541	51	615	1356	6.5	5.5~7.5	214	8.4	632	24.9	7.5 9.4/32	291	BS	320/A/A	E	
205/55R16	91 V	14542	51	615	1356	6.5	5.5~7.5	214	8.4	632	24.9	7.5 9.4/32	291	BS	320/A/A	E	
205/55ZR16	91W	14543	51	615	1356	6.5	5.5~7.5	214	8.4	632	24.9	7.5 9.4/32	291	BS	320/A/A	E	
205/55ZR16	94W XL	15682	50	670	1477	6.5	5.5~7.5	214	8.4	632	24.9	7.5 9.4/32	291	BS	320/A/A	E	
195/55R16	87 V	14540	51	545	1201	6.0	5.5~7.0	201	7.9	620	24.4	7.5 9.4/32	286	BS	320/A/A	E	
195/55R16	91 V XL	15773	50	615	1356	6.0	5.5~7.0	201	7.9	620	24.4	7.5 9.4/32	286	BS	320/A/A	E	
215/60R16	99 V XL	14555	50	775	1709	6.5	6.0~7.5	221	8.7	664	26.1	7.5 9.4/32	304	BS	320/A/A	E	
205/60R16	96 H XL	15683	50	710	1565	6.0	5.5~7.5	209	8.2	652	25.7	7.5 9.4/32	299	BS	320/A/A	E	
205/60R16	96 H XL	18347	50	710	1565	6.0	5.5~7.5	209	8.2	652	25.7	7.5 9.4/32	299	BS	320/A/A	E	


* Available from the 1st Quarter of 2022

• Our company is entitled to make any change on any information in this catalogue, without further notice.

• All figures are for reference; our company is not responsible for printing errors.

EUROVIS Sport 04

SPORT ULTRA HIGH PERFORMANCE

4 Wide longitudinal grooves -
Improved drainage performanceHigh stiffness ribs -
Enhanced driving stabilityClaw shaped groove - Improved
traction performance in wetLarge shoulder block -
Enhanced handling performance**BENEFITS**


SPORT



PC / FULL-SIZE



PC / MID-SIZE

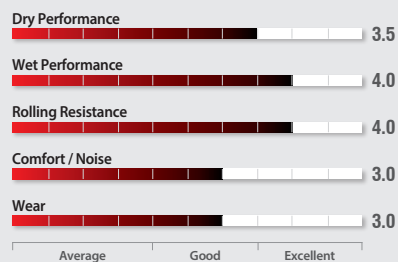**EXCELLENT
DRY PERFORMANCE****EXCELLENT
WET PERFORMANCE****IMPROVED
FUEL CONSUMPTION****KEY PERFORMANCE INDICATORS****EUROVIS Sport 04**

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.		SLR	S/W	UTQG	E	M+S
				kgs	lbs	Range	mm	inch	mm	inch	mm	/32"	mm					

15 inch

195/45R15	78 V	15794	51	425	937	6.5	6.0~7.5	195	7.7	557	21.9	7.5	9.4/32	259	BS	320/A/A	E	
195/50R15	82 H	14532	51	475	1047	6.0	5.5~7.0	201	7.9	577	22.7	7.5	9.4/32	267	BS	320/A/A	E	
195/50R15	82 V	14533	51	475	1047	6.0	5.5~7.0	201	7.9	577	22.7	7.5	9.4/32	267	BS	320/A/A	E	
195/55R15	85 V	14539	51	515	1135	6.0	5.5~7.0	201	7.9	595	23.4	7.5	9.4/32	274	BS	320/A/A	E	
185/55R15	82 H	14567	51	475	1047	6.0	5.0~6.5	194	7.6	585	23.0	7.2	9.1/32	270	BS	320/A/A	E	
185/55R15	82 V	14568	51	475	1047	6.0	5.0~6.5	194	7.6	585	23.0	7.2	9.1/32	270	BS	320/A/A	E	
205/60R15	91 V	14552	44	615	1356	6.0	5.5~7.5	209	8.2	627	24.7	7.5	9.4/32	286	BS	320/A/A	E	
195/60R15	88 H	14550	44	560	1235	6.0	5.5~7.0	201	7.9	615	24.2	7.5	9.4/32	282	BS	320/A/A	E	
195/60R15	88 V	14551	44	560	1235	6.0	5.5~7.0	201	7.9	615	24.2	7.5	9.4/32	282	BS	320/A/A	E	
185/60R15	88 H XL	14562	50	560	1235	5.5	5.0~6.5	189	7.4	603	23.7	7.2	9.1/32	277	BS	320/A/A	E	
175/60R15	81 H	14560	44	462	1019	5.0	5.0~6.0	177	7.0	591	23.3	7.2	9.1/32	272	BS	320/A/A	E	
195/65R15	91 V	14556	44	615	1356	6.0	5.5~7.0	201	7.9	635	25.0	7.5	9.4/32	289	BS	320/A/A	E	
195/65R15	91 H	14557	44	615	1356	6.0	5.5~7.0	201	7.9	635	25.0	7.5	9.4/32	289	BS	320/A/A	E	
195/65R15	95 T XL	14558	50	690	1521	6.0	5.5~7.0	201	7.9	635	25.0	7.5	9.4/32	289	BS	320/A/A	E	
185/65R15	88 T	14565	44	560	1235	5.5	5.0~6.5	189	7.4	621	24.4	7.2	9.1/32	284	BS	320/A/A	E	
185/65R15	88 H	14566	44	560	1235	5.5	5.0~6.5	189	7.4	621	24.4	7.2	9.1/32	284	BS	320/A/A	E	
175/65R15	84 H	14564	44	500	1102	5.0	5.0~6.0	177	7.0	609	24.0	7.2	9.1/32	279	BS	320/A/A	E	

14 inch

185/60R14	82 H	14561	44	475	1047	5.5	5.0~6.5	189	7.4	578	22.8	7.2	9.1/32	264	BS	320/A/A	E	
165/60R14	75 H	14559	44	387	853	5.0	4.5~6.0	170	6.7	554	21.8	7.2	9.1/32	255	BS	320/A/A	E	
175/65R14	82 T	14563	44	475	1047	5.0	5.0~6.0	177	7.0	584	23.0	7.2	9.1/32	267	BS	320/A/A	E	

* Available from the 1st Quarter of 2022

• Our company is entitled to make any change on any information in this catalogue, without further notice.


• All figures are for reference; our company is not responsible for printing errors.

N FERA SU1

SPORT ULTRA HIGH PERFORMANCE



4 Wide longitudinal grooves -
Improved drainage performance



Hydroplaning lateral grooves -
Excellent wet performance



3 Center block -
Straight Stability



Optimized shoulder block -
Max grip during cornering


BENEFITS



**EXCELLENT
DRY PERFORMANCE**

**EXCELLENT
WET PERFORMANCE**

**EXCELLENT
HANDLING PERFORMANCE**

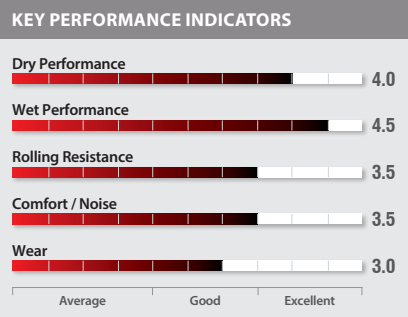

N FERA SU1

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.		SLR	S/W	UTQG	E	M+S
				kgs	lbs	Range		mm	inch	mm	inch	mm	/32"					
20 inch																		
245/40ZR20	99 Y XL	14106	50	775	1709	8.5	8.0~9.5	248	9.8	704	27.7	7.5	9.4/32	331	BS	300/AA/A	E	
19 inch																		
275/35ZR19	100 Y XL	13518	50	800	1764	9.5	9.0~11.0	278	10.9	675	26.6	7.5	9.4/32	317	BS	300/AA/A	E	
*265/35ZR19	98 Y XL	16404	50	750	1653	9.5	9.0~10.5	271	10.7	669	26.3	7.9	10.0/32	315	BS	300/AA/A	E	
*255/35ZR19	96W XL	12338	50	710	1565	9.0	8.5~10.0	260	10.2	661	26.0	7.5	9.4/32	311	BS	300/AA/A	E	
235/35ZR19	91 Y XL	12315	50	615	1356	8.5	8.0~9.5	241	9.5	647	25.5	7.5	9.4/32	306	BS	300/AA/A	E	
275/40ZR19	105 Y XL	13520	50	925	2039	9.5	9.0~10.5	278	10.9	703	27.7	7.5	9.4/32	328	BS	300/AA/A	E	
245/40ZR19	98 Y XL	12723	50	750	1653	8.5	8.0~9.5	248	9.8	679	26.7	7.5	9.4/32	318	BS	300/AA/A	E	
245/40ZR19	98 Y XL	17931	50	750	1653	8.5	8.0~9.5	248	9.8	679	26.7	7.5	9.4/32	318	BS	300/AA/A	E	
*235/40ZR19	96 Y XL	15089	50	710	1565	8.5	8.0~9.5	241	9.5	671	26.4	7.5	9.4/32	315	BS	300/AA/A	E	
*225/40ZR19	93 Y XL	14121	50	650	1433	8.0	7.5~9.0	230	9.1	663	26.1	7.5	9.4/32	312	BS	300/AA/A	E	
255/45ZR19	104 Y XL	13524	50	900	1984	8.5	8.0~9.5	255	10.0	713	28.1	7.5	9.4/32	332	BS	300/AA/A	E	
245/45ZR19	102 Y XL	12584	50	850	1874	8.0	7.5~9.0	243	9.6	703	27.7	7.5	9.4/32	328	BS	300/AA/A	E	
225/45ZR19	96W XL	14099	50	710	1565	7.5	7.0~8.5	225	8.9	685	27.0	7.5	9.4/32	321	BS	300/AA/A	E	
18 inch																		
*275/35ZR18	99W XL	13517	50	775	1709	9.5	9.0~11.0	278	10.9	649	25.6	7.5	9.4/32	304	BS	300/AA/A	E	
*255/35ZR18	94 Y XL	12347	50	670	1477	9.0	8.5~10.0	260	10.2	635	25.0	7.5	9.4/32	298	BS	300/AA/A	E	
225/35ZR18	87 Y XL	12590	50	545	1201	8.0	7.5~9.0	230	9.1	615	24.2	7.5	9.4/32	291	BS	300/AA/A	E	
245/40ZR18	97 Y XL	12312	50	730	1609	8.5	8.0~9.5	248	9.8	653	25.7	7.5	9.4/32	306	BS	300/AA/A	E	
225/40ZR18	92 Y XL	14768	50	630	1389	8.0	7.5~9.0	230	9.1	637	25.1	7.5	9.4/32	299	BS	300/AA/A	E	
255/45ZR18	103 Y XL	12734	50	875	1929	8.5	8.0~9.5	255	10.0	687	27.0	7.5	9.4/32	319	BS	300/AA/A	E	
245/45ZR18	100 Y XL	12726	50	800	1764	8.0	7.5~9.0	243	9.6	677	26.7	7.5	9.4/32	315	BS	300/AA/A	E	
245/45ZR18	100 Y XL	18447	50	800	1764	8.0	7.5~9.0	243	9.6	677	26.7	7.5	9.4/32	315	BS	300/AA/A	E	
235/45ZR18	98 Y XL	12335	50	750	1653	8.0	7.5~9.0	236	9.3	669	26.3	7.5	9.4/32	312	BS	300/AA/A	E	
235/45ZR18	98 Y XL	18457	50	750	1653	8.0	7.5~9.0	236	9.3	669	26.3	7.5	9.4/32	312	BS	300/AA/A	E	
225/45ZR18	95 Y XL	12332	50	690	1521	7.5	7.0~8.5	225	8.9	659	25.9	7.5	9.4/32	308	BS	300/AA/A	E	
225/45R18	95 V XL	17079	49	690	1521	7.5	7.0~8.5	225	8.9	659	25.9	7.5	9.4/32	308	BS	400/A/A	E	
245/50ZR18	104W XL	12344	50	900	1984	7.5	7.0~8.5	253	10.0	703	27.7	7.5	9.4/32	325	BS	300/AA/A	E	
235/50ZR18	101W XL	12719	50	825	1819	7.5	6.5~8.5	245	9.6	693	27.3	7.5	9.4/32	321	BS	300/AA/A	E	
235/55ZR18	104W XL	12721	50	900	1984	7.5	6.5~8.5	245	9.6	715	28.2	7.5	9.4/32	330	BS	300/AA/A	E	

* Available from the 1st Quarter of 2022


• Our company is entitled to make any change on any information in this catalogue, without further notice.
• All figures are for reference; our company is not responsible for printing errors.

N FERA SU1

SPORT ULTRA HIGH PERFORMANCE



4 Wide longitudinal grooves -
Improved drainage performance



Hydroplaning lateral grooves -
Excellent wet performance



3 Center block -
Straight Stability



Optimized shoulder block -
Max grip during cornering


BENEFITS



**EXCELLENT
DRY PERFORMANCE**

**EXCELLENT
WET PERFORMANCE**

**EXCELLENT
HANDLING PERFORMANCE**

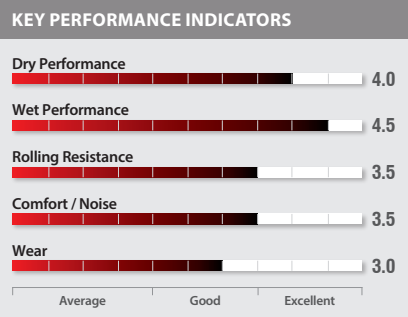

N FERA SU1

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.		SLR.	S/W	UTQG	E	M
				kgs	lbs		Range	mm	inch	mm	inch	mm	/32"					
17 inch																		
245/45ZR17	99 Y XL	13418	50	775	1709	8.0	7.5~9.0	243	9.6	652	25.7	7.5	9.4/32	302	BS	300/AA/A	E	
225/45ZR17	94 Y XL	12300	50	670	1477	7.5	7.0~8.5	225	8.9	634	25.0	7.5	9.4/32	295	BS	300/AA/A	E	
215/45ZR17	91W XL	12351	50	615	1356	7.0	7.0~8.0	213	8.4	626	24.6	7.5	9.4/32	292	BS	300/AA/A	E	
225/50ZR17	98W XL	14889	50	750	1653	7.0	6.0~8.0	233	9.2	658	25.9	7.5	9.4/32	305	BS	300/AA/A	E	
225/50ZR17	98W XL	17925	50	750	1653	7.0	6.0~8.0	233	9.2	658	25.9	7.5	9.4/32	305	BS	300/AA/A	E	
215/50ZR17	95W XL	12330	50	690	1521	7.0	6.0~7.5	226	8.9	648	25.5	7.5	9.4/32	301	BS	300/AA/A	E	
235/55ZR17	103W XL	13527	50	875	1929	7.5	6.5~8.5	245	9.6	690	27.2	7.5	9.4/32	317	BS	300/AA/A	E	
225/55ZR17	101W XL	13526	50	825	1819	7.0	6.0~8.0	233	9.2	680	26.8	7.5	9.4/32	313	BS	300/AA/A	E	
215/55ZR17	98W XL	12353	50	750	1653	7.0	6.0~7.5	226	8.9	668	26.3	7.5	9.4/32	309	BS	300/AA/A	E	
215/55ZR17	98W XL	17911	50	750	1653	7.0	6.0~7.5	226	8.9	668	26.3	7.5	9.4/32	309	BS	300/AA/A	E	

16 inch

205/45ZR16	87W XL	12303	50	545	1201	7.0 6.5~7.5	206	8.1	590	23.2	7.5	9.4/32	275	BS	300/AA/A	E		
225/55ZR16	95W	12718	51	690	1521	7.0 6.0~8.0	233	9.2	654	25.7	7.5	9.4/32	300	BS	300/AA/A	E		
215/55ZR16	97W XL	12358	50	730	1609	7.0 6.0~7.5	226	8.9	642	25.3	7.5	9.4/32	295	BS	300/AA/A	E		
215/55ZR16	97W XL	17908	50	730	1609	7.0 6.0~7.5	226	8.9	642	25.3	7.5	9.4/32	295	BS	300/AA/A	E		
205/55ZR16	94W XL	14770	50	670	1477	6.5 5.5~7.5	214	8.4	632	24.9	7.5	9.4/32	291	BS	300/AA/A	E		

* Available from the 1st Quarter of 2022

• Our company is entitled to make any change on any information in this catalogue, without further notice.

• All figures are for reference; our company is not responsible for printing errors.

N8000

SPORT ULTRA HIGH PERFORMANCE



Asymmetric tread design -
Out -Improved handling
Inner - Wet performance



Straight center rib -
Directional driving stability



Organic style lateral Grooves -
Enhanced traction



Rigid shoulder block -
Enhanced cornering & handling


BENEFITS



**EXCELLENT
DRY PERFORMANCE**

**EXCELLENT
WET PERFORMANCE**

**EXCELLENT
HANDLING PERFORMANCE**

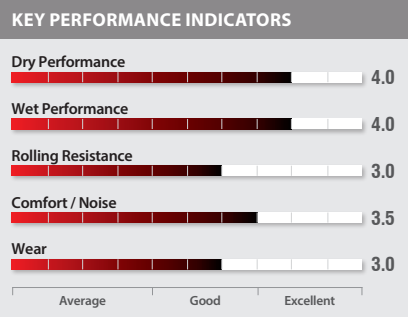

N8000

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.	SLR	S/W	UTQG	E	M+S
				kgs	lbs	Range	mm	inch	mm	inch	mm	/32"					

20 inch

255/35ZR20	97 Y XL	10934	50	730	1609	9.0	8.5~10.0	260	10.2	686	27.0	7.9 10.0/32	324	BS	280/AA/A	E	
245/35ZR20	95 Y XL	10929	50	690	1521	8.5	8.0~9.5	248	9.8	680	26.8	7.9 10.0/32	322	BS	280/AA/A	E	
P245/45ZR20	103 Y XL	13155	50	875	1929	8.0	7.5~9.0	243	9.6	728	28.7	7.9 10.0/32	340	BS	280/AA/A	E	

19 inch

275/30ZR19	96 Y XL	11491	50	710	1565	9.5	9.0~10.0	278	10.9	649	25.6	7.9 10.0/32	307	BS	280/AA/A	E	
255/30ZR19	91 Y XL	13192	50	615	1356	9.0	8.5~9.5	260	10.2	637	25.1	7.9 10.0/32	302	BS	280/AA/A	E	
275/35ZR19	100W XL	12574	50	800	1764	9.5	9.0~11.0	278	10.9	675	26.6	7.9 10.0/32	317	BS	280/AA/A	E	
255/35ZR19	96W XL	12573	50	710	1565	9.0	8.5~10.0	260	10.2	661	26.0	7.9 10.0/32	311	BS	280/AA/A	E	
245/35ZR19	93 Y XL	10925	50	650	1433	8.5	8.0~9.5	248	9.8	655	25.8	7.9 10.0/32	309	BS	280/AA/A	E	
235/35ZR19	91 Y XL	10924	50	615	1356	8.5	8.0~9.5	241	9.5	647	25.5	7.9 10.0/32	306	BS	280/AA/A	E	
225/35ZR19	88W XL	12572	50	560	1235	8.0	7.5~9.0	230	9.1	641	25.2	7.9 10.0/32	304	BS	280/AA/A	E	
255/40ZR19	100 Y XL	12026	50	800	1764	9.0	8.5~10.0	260	10.2	687	27.0	7.9 10.0/32	322	BS	280/AA/A	E	
245/40ZR19	98W XL	12027	50	750	1653	8.5	8.0~9.5	248	9.8	679	26.7	7.9 10.0/32	318	BS	280/AA/A	E	
245/40ZR19	98W XL	17916	50	750	1653	8.5	8.0~9.5	248	9.8	679	26.7	7.9 10.0/32	318	BS	280/AA/A	E	
235/40ZR19	96 Y XL	13194	50	710	1565	8.5	8.0~9.5	241	9.5	671	26.4	7.9 10.0/32	315	BS	280/AA/A	E	
225/40ZR19	93W XL	13240	50	650	1433	8.0	7.5~9.0	230	9.1	663	26.1	7.9 10.0/32	312	BS	280/AA/A	E	
245/45ZR19	102 Y XL	12023	50	850	1874	8.0	7.5~9.0	243	9.6	703	27.7	7.9 10.0/32	328	BS	280/AA/A	E	

18 inch

235/40ZR18	95 Y XL	10945	50	690	1521	8.5	8.0~9.5	241	9.5	645	25.4	7.9 10.0/32	302	BS	280/AA/A	E	
225/40ZR18	92 Y XL	10943	50	630	1389	8.0	7.5~9.0	230	9.1	637	25.1	7.9 10.0/32	299	BS	280/AA/A	E	
225/45ZR18	95 Y XL	11490	50	690	1521	7.5	7.0~8.5	225	8.9	659	25.9	7.9 10.0/32	308	BS	280/AA/A	E	
235/50ZR18	101W XL	11489	50	825	1819	7.5	6.5~8.5	245	9.6	693	27.3	7.9 10.0/32	321	BS	280/AA/A	E	

* Our company is entitled to make any change on any information in this catalogue, without further notice.
* All figures are for reference; our company is not responsible for printing errors.

N8000

SPORT ULTRA HIGH PERFORMANCE



Asymmetric tread design -
Out - Improved handling
Inner - Wet performance



Straight center rib -
Directional driving stability



Organic style lateral Grooves -
Enhanced traction



Rigid shoulder block -
Enhanced cornering & handling


BENEFITS



**EXCELLENT
DRY PERFORMANCE**

**EXCELLENT
WET PERFORMANCE**

**EXCELLENT
HANDLING PERFORMANCE**

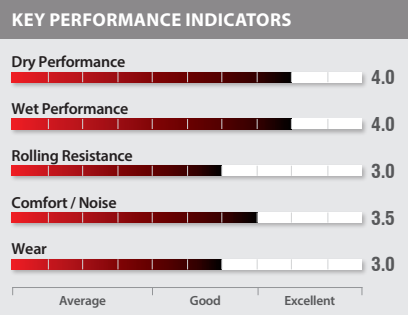

N8000

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.	SLR	S/W	UTQG	E	M+S
				kgs	lbs	Range	mm	inch	mm	inch	mm	/32"					

17 inch

245/40ZR17	95W XL	11460	50	690	1521	8.5	8.0~9.5	248	9.8	628	24.7	7.9 10.0/32	293	BS	280/AA/A	E	
215/40ZR17	87W XL	10940	50	545	1201	7.5	7.0~8.5	218	8.6	604	23.8	7.9 10.0/32	284	BS	280/AA/A	E	
245/45ZR17	99W XL	10968	50	775	1709	8.0	7.5~9.0	243	9.6	652	25.7	7.9 10.0/32	302	BS	280/AA/A	E	
245/45ZR17	99W XL	18345	50	775	1709	8.0	7.5~9.0	243	9.6	652	25.7	7.9 10.0/32	302	BS	280/AA/A	E	
235/45ZR17	97W XL	10959	50	730	1609	8.0	7.5~9.0	236	9.3	644	25.4	7.9 10.0/32	299	BS	280/AA/A	E	
235/45ZR17	97W XL	18350	50	730	1609	8.0	7.5~9.0	236	9.3	644	25.4	7.9 10.0/32	299	BS	280/AA/A	E	
225/45ZR17	94W XL	10958	50	670	1477	7.5	7.0~8.5	225	8.9	634	25.0	7.9 10.0/32	295	BS	280/AA/A	E	
215/45ZR17	91W XL	10956	50	615	1356	7.0	7.0~8.0	213	8.4	626	24.6	7.9 10.0/32	292	BS	280/AA/A	E	
225/50ZR17	98W XL	10991	50	750	1653	7.0	6.0~8.0	233	9.2	658	25.9	7.9 10.0/32	305	BS	280/AA/A	E	
225/50ZR17	98W XL	18338	50	750	1653	7.0	6.0~8.0	233	9.2	658	25.9	7.9 10.0/32	305	BS	280/AA/A	E	
215/50ZR17	95W XL	11454	50	690	1521	7.0	6.0~7.5	226	8.9	648	25.5	7.9 10.0/32	301	BS	280/AA/A	E	
235/55ZR17	103W XL	11486	50	875	1929	7.5	6.5~8.5	245	9.6	690	27.2	7.9 10.0/32	317	BS	280/AA/A	E	
205/55ZR17	95 Y XL	13156	50	690	1521	6.5	5.5~7.5	214	8.4	658	25.9	7.9 10.0/32	305	BS	280/AA/A	E	

16 inch

205/50ZR16	91W XL	11458	50	615	1356	6.5	5.5~7.5	214	8.4	612	24.1	7.9 10.0/32	283	BS	280/AA/A	E	
225/55ZR16	99W XL	11459	50	775	1709	7.0	6.0~8.0	233	9.2	654	25.7	7.9 10.0/32	300	BS	280/AA/A	E	
215/55ZR16	97W XL	11182	50	730	1609	7.0	6.0~7.5	226	8.9	642	25.3	7.9 10.0/32	295	BS	280/AA/A	E	
215/55ZR16	97W XL	18341	50	730	1609	7.0	6.0~7.5	226	8.9	642	25.3	7.9 10.0/32	295	BS	280/AA/A	E	
205/55ZR16	94W XL	10993	50	670	1477	6.5	5.5~7.5	214	8.4	632	24.9	7.9 10.0/32	291	BS	280/AA/A	E	
195/55R16	91 V XL	11971	50	615	1356	6.0	5.5~7.0	201	7.9	620	24.4	7.9 10.0/32	286	BS	280/AA/A	E	

• Our company is entitled to make any change on any information in this catalogue, without further notice.
• All figures are for reference; our company is not responsible for printing errors.

EUROVIS HPO2

HIGH PERFORMANCE

Optimized tread contact patch -
Long tread life4 Wide longitudinal grooves -
Improved drainage performance3 center ribs -
Directional driving stabilityVarious shapes of sipe -
Comfort driving**BENEFITS****IMPROVED
FUEL CONSUMPTION****EXCELLENT
WET PERFORMANCE****BETTER COMFORT &
LOW NOISE****KEY PERFORMANCE INDICATORS****EUROVIS HPO2**

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.	SLR	S/W	UTQG	E	M+S
				kgs	lbs	Range	mm	inch	mm	inch	mm	/32"					

17 inch

225/50R17	94 V	15675	44	670	1477	7.0	6.0~8.0	233	9.2	658	25.9	7.5 9.4/32	305	BS	400/A/A	E	
205/50R17	93 V XL	15674	50	650	1433	6.5	5.5~7.5	214	8.4	638	25.1	7.5 9.4/32	297	BS	400/A/A	E	
225/60R17	99 V	15676	44	775	1709	6.5	6.0~8.0	228	9.0	702	27.6	7.5 9.4/32	322	BS	400/A/A	E	

16 inch

195/50R16	88 V XL	15810	50	560	1235	6.0	5.5~7.0	201	7.9	602	23.7	7.5 9.4/32	279	BS	400/A/A	E	
215/55R16	97 V XL	15812	50	730	1609	7.0	6.0~7.5	226	8.9	642	25.3	7.5 9.4/32	295	BS	400/A/A	E	
205/55R16	91 V	18560	44	615	1356	6.5	5.5~7.5	214	8.4	632	24.9	7.5 9.4/32	291	BS	400/A/A	E	
195/55R16	91 V XL	15811	50	615	1356	6.0	5.5~7.0	201	7.9	620	24.4	7.5 9.4/32	286	BS	400/A/A	E	
215/60R16	95 H	18569	44	690	1521	6.5	6.0~7.5	221	8.7	664	26.1	7.5 9.4/32	304	BS	400/A/A	E	
205/60R16	92 V	15672	44	630	1389	6.0	5.5~7.5	209	8.2	652	25.7	7.5 9.4/32	299	BS	400/A/A	E	
205/60R16	92 H	15743	44	630	1389	6.0	5.5~7.5	209	8.2	652	25.7	7.5 9.4/32	299	BS	400/A/A	E	
195/60R16	89 H	15815	44	580	1279	6.0	5.5~7.0	201	7.9	640	25.2	7.5 9.4/32	294	BS	400/A/A	E	
195/60R16	89 V	15816	44	580	1279	6.0	5.5~7.0	201	7.9	640	25.2	7.5 9.4/32	294	BS	400/A/A	E	
175/60R16	82 H	15671	44	475	1047	5.0	5.0~6.0	177	7.0	616	24.3	7.2 9.1/32	285	BS	400/A/A	E	
215/65R16	98 H	15826	44	750	1653	6.5	6.0~7.5	221	8.7	686	27.0	7.5 9.4/32	312	BS	400/A/A	E	
225/70R16	103 T	18570	44	875	1929	6.5	6.0~7.5	228	9.0	722	28.4	7.5 9.4/32	326	BS	400/A/A	E	

15 inch

195/50R15	82 V	18571	44	475	1047	6.0	5.5~7.0	201	7.9	577	22.7	7.5 9.4/32	267	BS	400/A/A	E	
175/50R15	75 H	15663	44	387	853	5.5	5.0~6.0	182	7.2	557	21.9	7.2 9.1/32	259	BS	400/A/A	E	
205/55R15	88 V	15664	44	560	1235	6.5	5.5~7.5	214	8.4	607	23.9	7.5 9.4/32	279	BS	400/A/A	E	
195/55R15	85 V	18564	44	515	1135	6.0	5.5~7.0	201	7.9	595	23.4	7.5 9.4/32	274	BS	400/A/A	E	
185/55R15	82 V	18573	44	475	1047	6.0	5.0~6.5	194	7.6	585	23.0	7.5 9.4/32	270	BS	400/A/A	E	
165/55R15	75 V	18566	44	387	853	5.0	4.5~6.0	170	6.7	563	22.2	7.5 9.4/32	261	BS	400/A/A	E	
195/60R15	88 V	18568	44	560	1235	6.0	5.5~7.0	201	7.9	615	24.2	7.5 9.4/32	282	BS	400/A/A	E	
185/60R15	84 H	15813	44	500	1102	5.5	5.0~6.5	189	7.4	603	23.7	7.5 9.4/32	277	BS	400/A/A	E	
185/60R15	84 T	15814	44	500	1102	5.5	5.0~6.5	189	7.4	603	23.7	7.5 9.4/32	277	BS	400/A/A	E	
175/60R15	81 V	18572	44	462	1019	5.0	5.0~6.0	177	7.0	591	23.3	7.5 9.4/32	272	BS	400/A/A	E	
165/60R15	77 T	15666	44	412	908	5.0	4.5~6.0	170	6.7	579	22.8	7.2 9.1/32	268	BS	400/A/A	E	
155/60R15	74 T	15665	44	375	827	4.5	4.5~5.5	157	6.2	567	22.3	7.2 9.1/32	263	BS	400/A/A	E	

• Our company is entitled to make any change on any information in this catalogue, without further notice.
• All figures are for reference; our company is not responsible for printing errors.

EUROVIS HPO2

HIGH PERFORMANCE

Optimized tread contact patch -
Long tread life4 Wide longitudinal grooves -
Improved drainage performance3 center ribs -
Directional driving stabilityVarious shapes of sipe -
Comfort driving**BENEFITS****IMPROVED
FUEL CONSUMPTION****EXCELLENT
WET PERFORMANCE****BETTER COMFORT &
LOW NOISE****KEY PERFORMANCE INDICATORS****EUROVIS HPO2**

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.		SLR	S/W	UTQG	E	M+S
				kgs	lbs	Range		mm	inch	mm	inch	mm	/32"					
15 inch																		
215/65R15	96 H	18562	44	710	1565	6.0	6.0~7.5	209	8.2	647	25.5	7.5	9.4/32	300	BS	400/A/A	E	
205/65R15	94 H	15670	44	670	1477	6.0	5.5~7.5	209	8.2	647	25.5	7.5	9.4/32	294	BS	400/A/A	E	
205/65R15	94 V	15741	44	670	1477	6.0	5.5~7.5	209	8.2	647	25.5	7.5	9.4/32	294	BS	400/A/A	E	
205/65R15	94 T	15742	44	670	1477	6.0	5.5~7.5	209	8.2	647	25.5	7.5	9.4/32	294	BS	400/A/A	E	
195/65R15	91 H	15822	44	615	1356	6.0	5.5~7.0	201	7.9	635	25.0	7.5	9.4/32	289	BS	400/A/A	E	
195/65R15	91 V	15823	44	615	1356	6.0	5.5~7.0	201	7.9	635	25.0	7.5	9.4/32	289	BS	400/A/A	E	
195/65R15	95 H XL	15824	50	690	1521	6.0	5.5~7.0	201	7.9	635	25.0	7.5	9.4/32	289	BS	400/A/A	E	
195/65R15	91 T	15825	44	615	1356	6.0	5.5~7.0	201	7.9	635	25.0	7.5	9.4/32	289	BS	400/A/A	E	
185/65R15	88 H	18567	44	560	1235	5.5	5.0~6.5	189	7.4	631	24.8	7.5	9.4/32	284	BS	400/A/A	E	
175/65R15	84 T	15782	44	500	1102	5.0	5.0~6.0	177	7.0	609	24.0	7.2	9.1/32	279	BS	400/A/A	E	
175/65R15	84 H	15821	44	500	1102	5.0	5.0~6.0	177	7.0	609	24.0	7.2	9.1/32	279	BS	400/A/A	E	
165/65R15	81 H	15669	44	462	1019	5.0	4.5~6.0	170	6.7	595	23.4	7.2	9.1/32	274	BS	400/A/A	E	
145/65R15	72 T	15668	44	355	783	4.5	4.0~5.0	150	5.9	569	22.4	7.2	9.1/32	264	BS	400/A/A	E	
205/70R15	96 T	15835	44	710	1565	6.0	5.0~7.0	209	8.2	669	26.3	7.5	9.4/32	303	BS	400/A/A	E	

14 inch

165/55R14	72 V	18565	44	355	783	5.0	4.5~6.0	170	6.7	538	21.2	7.2 9.1/32	249	BS	400/A/A	E	
185/65R14	86 H	15818	44	530	1168	5.5	5.0~6.5	189	7.4	596	23.5	7.5 9.4/32	271	BS	400/A/A	E	
185/65R14	86 T	15819	44	530	1168	5.5	5.0~6.5	189	7.4	596	23.5	7.5 9.4/32	271	BS	400/A/A	E	
175/65R14	82 H	15661	44	475	1047	5.0	5.0~6.0	177	7.0	584	23.0	7.2 9.1/32	267	BS	400/A/A	E	
175/65R14	82 T	15740	44	475	1047	5.0	5.0~6.0	177	7.0	584	23.0	7.2 9.1/32	267	BS	400/A/A	E	
165/65R14	79 T	15659	44	437	963	5.0	4.5~6.0	170	6.7	570	22.4	7.2 9.1/32	261	BS	400/A/A	E	
165/65R14	79 H	15660	44	437	963	5.0	4.5~6.0	170	6.7	570	22.4	7.2 9.1/32	261	BS	400/A/A	E	
155/65R14	75 T	15658	44	387	853	4.5	4.5~5.5	157	6.2	558	22.0	7.2 9.1/32	257	BS	400/A/A	E	
195/70R14	91 T	18561	44	615	1356	6.0	5.0~6.5	201	7.9	630	24.8	7.5 9.4/32	285	BS	400/A/A	E	
185/70R14	88 T	18563	44	560	1235	5.5	4.5~6.0	189	7.4	616	24.3	7.5 9.4/32	279	BS	400/A/A	E	
175/70R14	84 T	15833	44	500	1102	5.0	4.5~6.0	177	7.0	602	23.7	7.2 9.1/32	274	BS	400/A/A	E	
175/70R14	88 T XL	15834	50	560	1235	5.0	4.5~6.0	177	7.0	602	23.7	7.2 9.1/32	274	BS	400/A/A	E	
165/70R14	81 T	15831	44	462	1019	5.0	4.0~5.5	170	6.7	588	23.2	7.2 9.1/32	268	BS	400/A/A	E	
165/70R14	85 T XL	15832	50	515	1135	5.0	4.0~5.5	170	6.7	588	23.2	7.2 9.1/32	268	BS	400/A/A	E	
155/70R14	77 T	15662	44	412	908	4.5	4.0~5.0	157	6.2	574	22.6	7.2 9.1/32	263	BS	400/A/A	E	

13 inch

165/65R13	77 T	15817	44	412	908	5.0	4.5~6.0	170	6.7	544	21.4	7.2 9.1/32	248	BS	400/A/A	E	
155/65R13	73 T	18558	44	365	805	4.5	4.5~5.5	157	6.2	532	20.9	7.2 9.1/32	248	BS	400/A/A	E	
175/70R13	82 T	15830	44	475	1047	5.0	4.5~6.0	177	7.0	576	22.7	7.2 9.1/32	261	BS	400/A/A	E	
165/70R13	79 T	15829	44	437	963	5.0	4.0~5.5	170	6.7	562	22.1	7.2 9.1/32	255	BS	400/A/A	E	
155/70R13	75 T	15828	44	387	853	4.5	4.0~5.0	157	6.2	548	21.6	7.2 9.1/32	250	BS	400/A/A	E	
155/80R13	79 T	15838	44	437	963	4.5	4.0~5.0	157	6.2	578	22.8	7.2 9.1/32	262	BS	400/A/A	E	
145/80R13	75 S	18559	44	387	853	4.0	3.5~5.0	145	5.7	562	22.1	7.2 9.1/32	255	BS	400/A/A	E	

• Our company is entitled to make any change on any information in this catalogue, without further notice.

• All figures are for reference; our company is not responsible for printing errors.

N5000 Plus

THE NEW CLASS OF PREMIUM DRIVING



High stiffness block -
Steering stability



Dimple's heat distribution -
Reduces abnormal wear



Uniform block distribution -
Silent ride with best ride quality



Groove internal serration -
Improved driving stability in wet

BENEFITS



**EXCELLENT
DRY PERFORMANCE**




**BETTER COMFORT &
LOW NOISE**



LONG LASTING TREAD LIFE

KEY PERFORMANCE INDICATORS

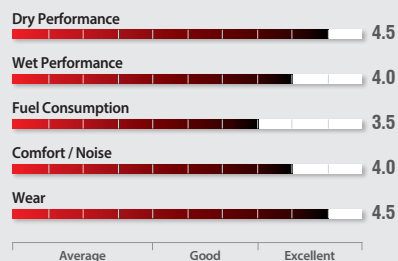

N5000 Plus

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.		SLR	S/W	UTQG	E	M+S
				kgs	lbs		Range	mm	inch	mm	inch	mm	/32"					
20 inch																		
245/35ZR20	95W XL	14480	50	690	1521	8.5	8.0~9.5	248	9.8	680	26.8	7.5	9.4/32	322	BS	560/A/A		M+S
245/45ZR20	103W XL	14488	50	875	1929	8.0	7.5~9.0	243	9.6	728	28.7	7.5	9.4/32	340	BS	560/A/A		
19 inch																		
245/40ZR19	98W XL	14486	50	750	1653	8.5	8.0~9.5	248	9.8	679	26.7	7.5	9.4/32	318	BS	560/A/A		M+S
235/55R19	101 H	15592	51	825	1819	7.5	6.5~8.5	245	9.6	741	29.2	7.5	9.4/32	343	BS	600/A/A		M+S
18 inch																		
245/40R18	97 H XL	15591	50	730	1609	8.5	8.0~9.5	248	9.8	653	25.7	7.5	9.4/32	306	BS	600/A/A	E	M+S
235/40R18	95 H XL	15590	50	690	1521	8.5	8.0~9.5	241	9.5	645	25.4	7.5	9.4/32	302	BS	600/A/A	E	M+S
225/40R18	88 H	15589	51	560	1235	8.0	7.5~9.0	230	9.1	637	25.1	7.5	9.4/32	299	BS	600/A/A	E	M+S
235/45R18	94 V	15587	51	670	1477	8.0	7.5~9.0	236	9.3	669	26.3	7.5	9.4/32	312	BS	600/A/A		M+S
225/45ZR18	95W XL	14483	50	690	1521	7.5	7.0~8.5	225	8.9	659	25.9	7.5	9.4/32	308	BS	560/A/A		M+S
215/45R18	93 V XL	15586	50	650	1433	7.0	7.0~8.0	213	8.4	651	25.6	7.5	9.4/32	305	BS	600/A/A	E	M+S
235/50R18	97 V	15584	51	730	1609	7.5	6.5~8.5	245	9.6	693	27.3	7.5	9.4/32	321	BS	600/A/A		M+S
* 225/50R18	95 H	15583	51	690	1521	7.0	6.0~8.0	233	9.2	683	26.9	7.5	9.4/32	317	BS	600/A/A	E	M+S
225/55R18	98 H	15582	51	750	1653	7.0	6.0~8.0	233	9.2	705	27.8	7.5	9.4/32	326	BS	600/A/A		M+S
215/55R18	95 H	15581	51	690	1521	7.0	6.0~7.5	226	8.9	693	27.3	7.5	9.4/32	321	BS	600/A/A		M+S
235/60R18	103 H	15580	44	875	1929	7.0	6.5~8.5	240	9.4	739	29.1	7.5	9.4/32	339	BS	600/A/A		M+S
225/60R18	100 H	15579	44	800	1764	6.5	6.0~8.0	228	9.0	727	28.6	7.5	9.4/32	334	BS	600/A/A		M+S
17 inch																		
* 205/40R17	80 H	15578	51	450	992	7.5	7.0~8.0	212	8.3	596	23.5	7.5	9.4/32	280	BS	600/A/A	E	M+S
245/45R17	95 H	15577	51	690	1521	8.0	7.5~9.0	243	9.6	652	25.7	7.5	9.4/32	302	BS	600/A/A	E	M+S
235/45R17	94 H	15576	51	670	1477	8.0	7.5~9.0	236	9.3	644	25.4	7.5	9.4/32	299	BS	600/A/A	E	M+S
225/45R17	91 H	15575	51	615	1356	7.5	7.0~8.5	225	8.9	634	25.0	7.5	9.4/32	295	BS	600/A/A	E	M+S
215/45R17	87 H	15574	51	545	1201	7.0	7.0~8.0	213	8.4	626	24.6	7.5	9.4/32	292	BS	600/A/A	E	M+S
205/45R17	88 V XL	15573	50	560	1235	7.0	6.5~7.5	206	8.1	616	24.3	7.5	9.4/32	288	BS	600/A/A	E	M+S
225/50R17	94 H	15571	51	670	1477	7.0	6.0~8.0	233	9.2	658	25.9	7.5	9.4/32	305	BS	600/A/A	E	M+S
215/50R17	95 V XL	15570	50	690	1521	7.0	6.0~7.5	226	8.9	648	25.5	7.5	9.4/32	301	BS	600/A/A	E	M+S
235/55R17	99 H	15568	51	775	1709	7.5	6.5~8.5	245	9.6	690	27.2	7.5	9.4/32	317	BS	600/A/A	E	M+S
225/55R17	101 V XL	15567	50	825	1819	7.0	6.0~8.0	233	9.2	680	26.8	7.5	9.4/32	313	BS	600/A/A	E	M+S
215/55R17	94 V	15566	51	670	1477	7.0	6.0~7.5	226	8.9	668	26.3	7.5	9.4/32	309	BS	600/A/A	E	M+S
* 225/60R17	99 H	15564	44	775	1709	6.5	6.0~8.0	228	9.0	702	27.6	7.5	9.4/32	322	BS	600/A/A		M+S
* 215/60R17	96 H	15563	44	710	1565	6.5	6.0~7.5	221	8.7	690	27.2	7.5	9.4/32	317	BS	600/A/A		M+S

* Available from the 2nd Quarter of 2022

• Our company is entitled to make any change on any information in this catalogue, without further notice.

• All figures are for reference; our company is not responsible for printing errors.

N5000 Plus

THE NEW CLASS OF PREMIUM DRIVING



High stiffness block -
Steering stability



Dimple's heat distribution -
Reduces abnormal wear



Uniform block distribution -
Silent ride with best ride quality



Groove internal serration -
Improved driving stability in wet

BENEFITS



PC / FULL-SIZE



PC / MID-SIZE



PC / SMALL CAR



**EXCELLENT
DRY PERFORMANCE**




**BETTER COMFORT &
LOW NOISE**



LONG LASTING TREAD LIFE

KEY PERFORMANCE INDICATORS

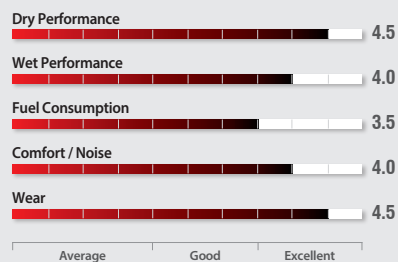

N5000 Plus

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.	SLR	S/W	UTQG	E	M+S
				kgs	lbs												
16 inch																	
205/50R16	87H	15561	51	545	1201	6.5	5.5~7.5	214	8.4	612	24.1	7.5 9.4/32	283	BS	600/A/A	E	M+S
195/50R16	84V	15560	51	500	1102	6.0	5.5~7.0	201	7.9	602	23.7	7.5 9.4/32	279	BS	600/A/A		M+S
225/55R16	95H	15559	51	690	1521	7.0	6.0~8.0	233	9.2	654	25.7	7.5 9.4/32	300	BS	600/A/A	E	M+S
215/55R16	97H XL	15557	50	730	1609	7.0	6.0~7.5	226	8.9	642	25.3	7.5 9.4/32	295	BS	600/A/A	E	M+S
215/55R16	97H XL	17930	50	730	1609	7.0	6.0~7.5	226	8.9	642	25.3	7.5 9.4/32	295	BS	600/A/A		M+S
*205/55R16	91H	15556	51	615	1356	6.5	5.5~7.5	214	8.4	632	24.9	7.5 9.4/32	291	BS	600/A/A	E	M+S
195/55R16	87V	15555	51	545	1201	6.0	5.5~7.0	201	7.9	620	24.4	7.5 9.4/32	286	BS	600/A/A		M+S
235/60R16	100H	15554	44	800	1764	7.0	6.5~8.5	240	9.4	688	27.1	7.5 9.4/32	313	BS	600/A/A	E	M+S
225/60R16	98H	15553	44	750	1653	6.5	6.0~8.0	228	9.0	676	26.6	7.5 9.4/32	308	BS	600/A/A	E	M+S
215/60R16	95H	15552	44	690	1521	6.5	6.0~7.5	221	8.7	664	26.1	7.5 9.4/32	304	BS	600/A/A	E	M+S
205/60R16	92H	15551	44	630	1389	6.0	5.5~7.5	209	8.2	652	25.7	7.5 9.4/32	299	BS	600/A/A	E	M+S
215/65R16	98H	15548	44	750	1653	6.5	6.0~7.5	221	8.7	686	27.0	7.5 9.4/32	312	BS	600/A/A	E	M+S
205/65R16	95H	15547	44	690	1521	6.0	5.5~7.5	209	8.2	672	26.5	7.5 9.4/32	307	BS	600/A/A	E	M+S
15 inch																	
225/60R15	96H	15704	44	710	1565	6.5	6.0~8.0	228	9.0	651	25.6	7.5 9.4/32	296	BS	600/A/A	E	M+S
205/60R15	91H	15603	44	615	1356	6.0	5.5~7.5	209	8.2	627	24.7	7.5 9.4/32	286	BS	600/A/A	E	M+S
195/60R15	88H	15546	44	560	1235	6.0	5.5~7.0	201	7.9	615	24.2	7.5 9.4/32	282	BS	600/A/A	E	M+S
215/65R15	96H	15703	44	710	1565	6.5	6.0~7.5	221	8.7	661	26.0	7.5 9.4/32	300	BS	600/A/A	E	M+S
205/65R15	94H	15544	44	670	1477	6.0	5.5~7.5	209	8.2	647	25.5	7.5 9.4/32	294	BS	600/A/A	E	M+S
195/65R15	91H	15543	44	615	1356	6.0	5.5~7.0	201	7.9	635	25.0	7.5 9.4/32	289	BS	600/A/A	E	M+S
185/65R15	88H	15542	44	560	1235	5.5	5.0~6.5	189	7.4	621	24.4	7.5 9.4/32	284	BS	600/A/A	E	M+S
14 inch																	
205/60R14	88H	15602	44	560	1235	6.0	5.5~7.5	209	8.2	602	23.7	7.5 9.4/32	274	BS	600/A/A	E	M+S
195/60R14	86H	15601	44	530	1168	6.0	5.5~7.0	201	7.9	590	23.2	7.5 9.4/32	269	BS	600/A/A	E	M+S
205/65R14	91H	15600	44	615	1356	6.0	5.5~7.5	209	8.2	622	24.5	7.5 9.4/32	282	BS	600/A/A	E	M+S
185/65R14	86H	15598	44	530	1168	5.5	5.0~6.5	189	7.4	596	23.5	7.5 9.4/32	271	BS	600/A/A	E	M+S
175/65R14	82H	15702	44	475	1047	5.0	5.0~6.0	177	7.0	584	23.0	7.2 9.1/32	267	BS	600/A/A	E	M+S


* Available from the 2nd Quarter of 2022

* Our company is entitled to make any change on any information in this catalogue, without further notice.

* All figures are for reference; our company is not responsible for printing errors.

CP672

COMFORT HIGH PERFORMANCE



4 Wide longitudinal grooves -
Improved drainage performance



Straight center semi dual rib -
Helps directional driving stability



5 random pitch variation -
Reduced pattern noise



Rigid shoulder block -
Enhanced cornering & handling

BENEFITS



**EXCELLENT
DRY PERFORMANCE**



**BETTER COMFORT &
LOW NOISE**



LONG LASTING TREAD LIFE




PC / MID-SIZE



PC / COMPACT

KEY PERFORMANCE INDICATORS

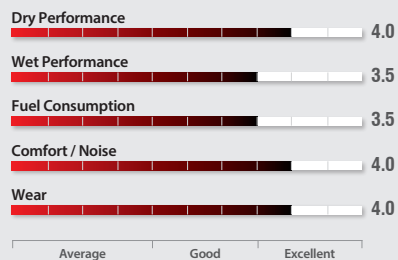


CP672

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.		SLR S/W	UTQG	E	M+S
				kgs	lbs		Range	mm	inch	mm	inch	mm	/32"				
18 inch																	
215/40R18	85 V	12580	44	515	1135	7.5	7.0~8.0	218	8.6	629	24.8	7.9 10.0/32	296	BS	500/A/A	E	M+S
235/45R18	98 V XL	11409	50	750	1653	8.0	7.5~9.0	236	9.3	669	26.3	7.9 10.0/32	312	BS	500/A/A	E	M+S
225/45R18	91 V	16040	36	615	1356	7.5	7.0~8.5	225	8.9	659	25.9	7.9 10.0/32	308	BS	500/A/A	E	M+S
215/45R18	93H XL	11482	50	650	1433	7.0	7.0~8.0	213	8.4	651	25.6	7.9 10.0/32	305	BS	500/A/A	E	M+S
P235/50R18	97 V	11412	44	730	1609	7.5	6.5~8.5	245	9.6	693	27.3	7.9 10.0/32	321	BS	500/A/A	E	M+S
P235/50R18	97 V	18343	44	730	1609	7.5	6.5~8.5	245	9.6	693	27.3	7.9 10.0/32	321	BS	500/A/A		M+S
P225/50R18	94 V	11483	44	670	1477	7.0	6.0~8.0	233	9.2	683	26.9	7.9 10.0/32	317	BS	500/A/A	E	M+S
P225/50R18	94 V	12934	44	670	1477	7.0	6.0~8.0	233	9.2	683	26.9	7.9 10.0/32	317	BS	500/A/A	E	M+S
P225/55R18	97H	11406	44	730	1609	7.0	6.0~8.0	233	9.2	705	27.8	7.9 10.0/32	326	BS	500/A/A	E	M+S
P225/60R18	99H	11408	44	775	1709	6.5	6.0~8.0	228	9.0	727	28.6	7.9 10.0/32	334	BS	500/A/A	E	M+S
17 inch																	
225/45R17	94 V XL	12863	50	670	1477	7.5	7.0~8.5	225	8.9	634	25.0	7.9 10.0/32	295	BS	500/A/A	E	M+S
215/45R17	91H XL	11198	50	615	1356	7.0	7.0~8.0	213	8.4	626	24.6	7.9 10.0/32	292	BS	500/A/A	E	M+S
215/45R17	91H XL	12923	50	615	1356	7.0	7.0~8.0	213	8.4	626	24.6	7.9 10.0/32	292	BS	500/A/A	E	M+S
P235/50R17	96 V	11411	44	710	1565	7.5	6.0~8.5	245	9.6	668	26.3	7.9 10.0/32	309	BS	500/A/A	E	M+S
P225/50R17	94 V	11263	44	670	1477	7.0	6.0~8.0	233	9.2	658	25.9	7.9 10.0/32	305	BS	500/A/A	E	M+S
P225/50R17	94 V	12933	44	670	1477	7.0	6.0~8.0	233	9.2	658	25.9	7.9 10.0/32	305	BS	500/A/A	E	M+S
P215/50R17	91 V	11262	44	615	1356	7.0	6.0~7.5	226	8.9	648	25.5	7.9 10.0/32	301	BS	500/A/A	E	M+S
P215/50R17	91 V	12931	44	615	1356	7.0	6.0~7.5	226	8.9	648	25.5	7.9 10.0/32	301	BS	500/A/A	E	M+S
P205/50R17	90 V XL	11202	50	600	1323	6.5	5.5~7.5	214	8.4	638	25.1	7.9 10.0/32	297	BS	500/A/A	E	M+S
P235/55R17	99H	11206	44	775	1709	7.5	6.5~8.5	245	9.6	690	27.2	7.9 10.0/32	317	BS	500/A/A	E	M+S
P235/55R17	99H	12960	44	775	1709	7.5	6.5~8.5	245	9.6	690	27.2	7.9 10.0/32	317	BS	500/A/A	E	M+S
P235/55R17	99H	18464	44	775	1709	7.5	6.5~8.5	245	9.6	690	27.2	7.9 10.0/32	317	BS	500/A/A	E	M+S
P225/55R17	97H	11405	44	730	1609	7.0	6.0~8.0	233	9.2	680	26.8	7.9 10.0/32	313	BS	500/A/A	E	M+S
P225/55R17	97H	12950	44	730	1609	7.0	6.0~8.0	233	9.2	680	26.8	7.9 10.0/32	313	BS	500/A/A	E	M+S
P225/55R17	97H	17907	44	730	1609	7.0	6.0~8.0	233	9.2	680	26.8	7.9 10.0/32	313	BS	500/A/A	E	M+S
P215/55R17	94 V	11205	44	670	1477	7.0	6.0~7.5	226	8.9	668	26.3	7.9 10.0/32	309	BS	500/A/A	E	M+S
P215/55R17	94 V	12945	44	670	1477	7.0	6.0~7.5	226	8.9	668	26.3	7.9 10.0/32	309	BS	500/A/A	E	M+S
205/55R17	95 V XL	16041	50	690	1521	6.5	5.5~7.5	214	8.4	658	25.9	7.9 10.0/32	305	BS	500/A/A	E	M+S
P225/60R17	98H	11407	44	750	1653	6.5	6.0~8.0	228	9.0	702	27.6	7.9 10.0/32	322	BS	500/A/A	E	M+S
P225/60R17	99 V	12537	44	775	1709	6.5	6.0~8.0	228	9.0	702	27.6	7.9 10.0/32	321	BS	500/A/A		M+S
P215/60R17	96H	11207	44	710	1565	6.5	6.0~7.5	221	8.7	690	27.2	7.9 10.0/32	317	BS	500/A/A	E	M+S
215/60R17	96H	13649	44	710	1565	6.5	6.0~7.5	221	8.7	690	27.2	8.1 10.2/32	317	BS	480/A/A	E	M+S
P215/60R17	96H	17906	44	710	1565	6.5	6.0~7.5	221	8.7	690	27.2	7.9 10.0/32	317	BS	500/A/A	E	M+S

* Our company is entitled to make any change on any information in this catalogue, without further notice.
* All figures are for reference; our company is not responsible for printing errors.

CP672

COMFORT HIGH PERFORMANCE



4 Wide longitudinal grooves -
Improved drainage performance



Straight center semi dual rib -
Helps directional driving stability



5 random pitch variation -
Reduced pattern noise



Rigid shoulder block -
Enhanced cornering & handling

BENEFITS



**EXCELLENT
DRY PERFORMANCE**




**BETTER COMFORT &
LOW NOISE**



LONG LASTING TREAD LIFE

KEY PERFORMANCE INDICATORS

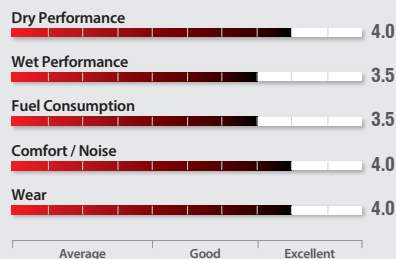

CP672

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.	SLR	S/W	UTQG	E	M+S
				kgs	lbs		Range	mm	inch	mm	inch	mm	/32"				
16 inch																	
P225/55R16	95 V	11260	44	690	1521	7.0	6.0~8.0	233	9.2	654	25.7	7.9 10.0/32	300	BS	500/A/A	E	M+S
P215/55R16	93 V	11259	44	650	1433	7.0	6.0~7.5	226	8.9	642	25.3	7.9 10.0/32	295	BS	500/A/A	E	M+S
P215/55R16	93 V	12943	44	650	1433	7.0	6.0~7.5	226	8.9	642	25.3	7.9 10.0/32	295	BS	500/A/A	E	M+S
P205/55R16	91 V	11044	44	615	1356	6.5	5.5~7.5	214	8.4	632	24.9	7.9 10.0/32	291	BS	500/A/A	E	M+S
P205/55R16	91 V	12941	44	615	1356	6.5	5.5~7.5	214	8.4	632	24.9	7.9 10.0/32	291	BS	500/A/A	E	M+S
P195/55R16	87 V	11403	44	545	1201	6.0	5.5~7.0	201	7.9	620	24.4	7.9 10.0/32	286	BS	500/A/A	E	M+S
P195/55R16	87 V	12940	44	545	1201	6.0	5.5~7.0	201	7.9	620	24.4	7.9 10.0/32	286	BS	500/A/A	E	M+S
P235/60R16	100 H	11055	44	800	1764	7.0	6.5~8.5	240	9.4	688	27.1	7.9 10.0/32	313	BS	500/A/A	E	M+S
P235/60R16	100 H	18450	44	800	1764	7.0	6.5~8.5	240	9.4	688	27.1	7.9 10.0/32	313	BS	500/A/A	E	M+S
P225/60R16	98 H	12954	44	730	1609	6.5	6.0~8.0	228	9.0	676	26.6	7.9 10.0/32	308	BS	500/A/A	E	M+S
P225/60R16	98 H	18348	44	750	1653	6.5	6.0~8.0	228	9.0	676	26.6	7.9 10.0/32	308	BS	500/A/A	E	
P225/60R16	98 H	18443	44	750	1653	6.5	6.0~8.0	228	9.0	676	26.6	7.9 10.0/32	308	BS	500/A/A	E	M+S
P215/60R16	95 H	11050	44	690	1521	6.5	6.0~7.5	221	8.7	664	26.1	7.9 10.0/32	304	BS	500/A/A	E	M+S
P215/60R16	95 H	12952	44	690	1521	6.5	6.0~7.5	221	8.7	664	26.1	7.9 10.0/32	304	BS	500/A/A	E	M+S
205/60R16	92 H	11261	44	630	1356	6.0	5.5~7.5	209	8.2	652	25.7	7.9 10.0/32	299	BS	500/A/A	E	M+S
205/60R16	92 H	12949	44	630	1389	6.0	5.5~7.5	209	8.2	652	25.7	7.9 10.0/32	299	BS	500/A/A	E	M+S
P215/65R16	98 H	11060	44	750	1653	6.5	6.0~7.5	221	8.7	686	27.0	7.9 10.0/32	312	BS	500/A/A	E	M+S
P215/65R16	98 H	18344	44	750	1653	6.5	6.0~7.5	221	8.7	686	27.0	7.9 10.0/32	312	BS	500/A/A	E	M+S
P205/65R16	95 H	11208	44	690	1521	6.0	5.5~7.5	209	8.2	672	26.5	7.9 10.0/32	307	BS	500/A/A	E	M+S
15 inch																	
P195/55R15	85 V	11255	44	515	1135	6.0	5.5~7.0	201	7.9	595	23.4	7.9 10.0/32	274	BS	460/A/A	E	M+S
P195/55R15	85 V	12938	44	515	1135	6.0	5.5~7.0	201	7.9	595	23.4	7.9 10.0/32	274	BS	460/A/A	E	M+S
P215/60R15	94 H	11049	44	670	1477	6.5	6.0~7.5	221	8.7	639	25.2	7.9 10.0/32	291	BS	500/A/A	E	M+S
P205/60R15	91 H	11048	44	615	1356	6.0	5.5~7.5	209	8.2	627	24.7	7.9 10.0/32	286	BS	500/A/A	E	M+S
P205/60R15	91 H	12947	44	615	1356	6.0	5.5~7.5	209	8.2	627	24.7	7.9 10.0/32	286	BS	500/A/A	E	M+S
P195/60R15	88 H	11047	44	560	1235	6.0	5.5~7.0	201	7.9	615	24.2	7.9 10.0/32	282	BS	460/A/A	E	M+S
P195/60R15	88 H	12944	44	560	1235	6.0	5.5~7.0	201	7.9	615	24.2	7.9 10.0/32	282	BS	500/A/A	E	M+S
P185/60R15	84 H	16294	44	500	1102	5.5	5.0~6.5	189	7.4	603	23.7	7.9 10.0/32	277	BS	460/A/A	E	M+S
P215/65R15	96 H	12963	44	710	1565	6.5	6.0~7.5	221	8.7	661	26.0	7.9 10.0/32	300	BS	500/A/A	E	M+S
P205/65R15	94 H	10665	44	670	1477	6.0	5.5~7.5	209	8.2	647	25.5	7.9 10.0/32	294	BS	500/A/A	E	M+S
P205/65R15	94 H	12961	44	670	1477	6.0	5.5~7.5	209	8.2	647	25.5	7.9 10.0/32	294	BS	500/A/A	E	M+S
P195/65R15	91 H	11058	44	615	1356	6.0	5.5~7.0	201	7.9	635	25.0	7.9 10.0/32	289	BS	460/A/A	E	M+S
P195/65R15	91 H	12959	44	615	1356	6.0	5.5~7.0	201	7.9	635	25.0	7.9 10.0/32	289	BS	460/A/A	E	M+S
P185/65R15	88 H	11057	44	560	1235	5.5	5.0~6.5	189	7.4	621	24.4	7.9 10.0/32	284	BS	460/A/A	E	M+S
P185/65R15	88 H	12957	44	560	1235	5.5	5.0~6.5	189	7.4	621	24.4	7.9 10.0/32	284	BS	460/A/A	E	M+S
P185/65R15	88 H	16293	44	560	1235	5.5	5.0~6.5	189	7.4	621	24.4	7.9 10.0/32	284	BS	460/A/A	E	M+S
14 inch																	
P185/60R14	82 H	12939	44	475	1047	5.5	5.0~6.5	189	7.4	578	22.8	7.9 10.0/32	264	BS	460/A/A	E	M+S
P185/60R14	82 H	16292	44	475	1047	5.5	5.0~6.5	189	7.4	578	22.8	7.9 10.0/32	264	BS	460/A/A	E	M+S
P185/65R14	86 H	16296	44	530	1168	5.5	5.0~6.5	189	7.4	596	23.5	7.9 10.0/32	271	BS	460/A/A	E	M+S
P175/65R14	82 H	16295	44	475	1047	5.0	5.0~6.0	177	7.0	584	23.0	7.4 9.3/32	267	BS	460/A/A	E	M+S
13 inch																	
175/60R13	77 H	16297	44	412	908	5.0	5.0~6.0	177	7.0	540	21.3	7.4 9.3/32	247	BS	460/A/A	E	M+S

• Our company is entitled to make any change on any information in this catalogue, without further notice.
• All figures are for reference; our company is not responsible for printing errors.

NPriz 4S

EUROPEAN ALL WEATHER



V shaped pattern design -
Rain & snow drainage performance



Saw toothed block edge -
Enhanced snow traction



Wider lateral groove -
Improved wet & snow performance



Optimum multi siping -
Improved 4 season performance

BENEFITS



PC / MID-SIZE

PC / COMPACT



**EXCELLENT
DRY PERFORMANCE**




**EXCELLENT
WET PERFORMANCE**



**EXCELLENT
SNOW PERFORMANCE**

KEY PERFORMANCE INDICATORS

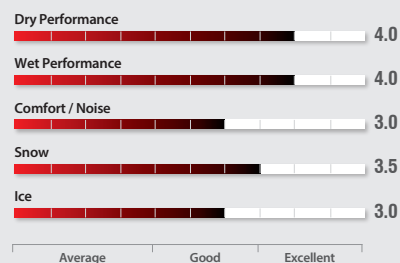

NPriz 4S

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.	SLR	S/W	UTQG	E	M+S
				kgs	lbs	Range	mm	inch	mm	inch	mm	/32"					

17 inch

225/45R17	94 V XL	14863	50	670	1477	7.5	7.0~8.5	225	8.9	634	25.0	8.2 10.3/32	295	BS	300/A/A	E	M+S
225/50R17	94 V	14866	44	670	1477	7.0	6.0~8.0	233	9.2	658	25.9	8.2 10.3/32	305	BS	300/A/A	E	M+S
225/50R17	98 V XL	14867	50	750	1653	7.0	6.0~8.0	233	9.2	658	25.9	8.2 10.3/32	305	BS	300/A/A	E	M+S
215/60R17	96 H	14880	44	710	1565	6.5	6.0~7.5	221	8.7	690	27.2	8.2 10.3/32	317	BS	300/A/A	E	M+S

16 inch

225/55R16	95 H	14871	44	690	1521	7.0	6.0~8.0	233	9.2	654	25.7	8.2 10.3/32	300	BS	300/A/A	E	M+S
215/55R16	97 V XL	14870	50	730	1609	7.0	6.0~7.5	226	8.9	642	25.3	8.2 10.3/32	295	BS	300/A/A	E	M+S
205/55R16	94 H XL	14873	50	670	1477	6.5	5.5~7.5	214	8.4	632	24.9	8.2 10.3/32	291	BS	300/A/A	E	M+S
205/55R16	94 V XL	14874	50	670	1477	6.5	5.5~7.5	214	8.4	632	24.9	8.2 10.3/32	291	BS	300/A/A	E	M+S
205/55R16	91 H	15041	44	615	1356	6.5	5.5~7.5	214	8.4	632	24.9	8.2 10.3/32	291	BS	300/A/A	E	M+S
195/55R16	91 H XL	14843	50	615	1356	6.0	5.5~7.0	201	7.9	620	24.4	8.2 10.3/32	286	BS	300/A/A	E	M+S
215/60R16	95 H	14879	44	690	1521	6.5	6.0~7.5	221	8.7	664	26.1	8.2 10.3/32	304	BS	300/A/A	E	M+S
205/60R16	96 H XL	14878	50	710	1565	6.0	5.5~7.5	209	8.2	652	25.7	8.2 10.3/32	299	BS	300/A/A	E	M+S
215/65R16	98 H	14853	44	750	1653	6.5	6.0~7.5	221	8.7	686	27.0	8.2 10.3/32	312	BS	300/A/A	E	M+S

15 inch

195/50R15	82 H	14865	44	475	1047	6.0	5.5~7.0	201	7.9	577	22.7	8.2 10.3/32	267	BS	300/A/A	E	M+S
195/55R15	85 H	14869	44	515	1135	6.0	5.5~7.0	201	7.9	595	23.4	8.2 10.3/32	274	BS	300/A/A	E	M+S
185/55R15	82 H	14868	44	475	1047	6.0	5.0~6.5	194	7.6	585	23.0	8.2 10.3/32	270	BS	300/A/A	E	M+S
205/60R15	91 H	14877	44	615	1356	6.0	5.5~7.5	209	8.2	627	24.7	8.2 10.3/32	286	BS	300/A/A	E	M+S
195/60R15	88 H	14876	44	560	1235	6.0	5.5~7.0	201	7.9	615	24.2	8.2 10.3/32	282	BS	300/A/A	E	M+S
185/60R15	88 H XL	14872	50	560	1235	5.5	5.0~6.5	189	7.4	603	23.7	8.2 10.3/32	277	BS	300/A/A	E	M+S
195/65R15	91 H	14881	44	615	1356	6.0	5.5~7.0	201	7.9	635	25.0	8.2 10.3/32	289	BS	300/A/A	E	M+S
195/65R15	91 T	14882	44	615	1356	6.0	5.5~7.0	201	7.9	635	25.0	8.2 10.3/32	289	BS	300/A/A	E	M+S
195/65R15	95 T XL	14883	50	690	1521	6.0	5.5~7.0	201	7.9	635	25.0	8.2 10.3/32	289	BS	300/A/A	E	M+S
195/65R15	91 V	14988	44	615	1356	6.0	5.5~7.0	201	7.9	635	25.0	8.2 10.3/32	289	BS	300/A/A	E	M+S
185/65R15	88 T	14850	44	560	1235	5.5	5.0~6.5	189	7.4	621	24.4	8.2 10.3/32	284	BS	300/A/A	E	M+S
185/65R15	88 H	14987	44	560	1235	5.5	5.0~6.5	189	7.4	621	24.4	8.2 10.3/32	284	BS	300/A/B	E	M+S
175/65R15	84 T	14848	44	500	1102	5.0	5.0~6.0	177	7.0	609	24.0	8.2 10.3/32	279	BS	300/A/A	E	M+S

14 inch

195/60R14	86 T	14875	44	530	1168	6.0	5.5~7.0	201	7.9	590	23.2	8.2 10.3/32	269	BS	300/A/A	E	M+S
185/60R14	82 T	14845	44	475	1047	5.5	5.0~6.5	189	7.4	578	22.8	8.2 10.3/32	264	BS	300/A/A	E	M+S
185/60R14	82 H	14986	44	475	1047	5.5	5.0~6.5	189	7.4	578	22.8	8.2 10.3/32	264	BS	300/A/A	E	M+S
165/60R14	75 H	14844	44	387	853	5.0	4.5~6.0	170	6.7	554	21.8	8.2 10.3/32	255	BS	300/A/A	E	M+S
185/65R14	86 T	14849	44	530	1168	5.5	5.0~6.5	189	7.4	596	23.5	8.2 10.3/32	271	BS	300/A/A	E	M+S
175/65R14	82 T	14847	44	475	1047	5.0	5.0~6.0	177	7.0	584	23.0	8.2 10.3/32	267	BS	300/A/A	E	M+S
165/65R14	79 T	15052	44	437	963	5.0	4.5~6.0	170	6.7	570	22.4	8.2 10.3/32	261	BS	300/A/A	E	M+S
155/65R14	75 T	14846	44	387	853	4.5	4.5~5.5	157	6.2	558	22.0	7.9 10.0/32	257	BS	300/A/A	E	M+S
175/70R14	84 T	15055	44	500	1102	5.0	4.5~6.0	177	7.0	602	23.7	8.3 10.5/32	274	BS	300/A/A	E	M+S

13 inch

175/65R13	80 T	15051	44	450	992	5.0	5.0~6.0	177	7.0	558	22.0	8.3 10.5/32	254	BS	300/A/A	E	M+S
175/70R13	82 T	15054	44	475	1047	5.0	4.5~6.0	177	7.0	576	22.7	8.3 10.5/32	261	BS	300/A/A	E	M+S
155/70R13	75 T	15053	44	387	853	4.5	4.0~5.0	157	6.2	548	21.6	7.9 10.0/32	250	BS	300/A/A	E	M+S

• Our company is entitled to make any change on any information in this catalogue, without further notice.
• All figures are for reference; our company is not responsible for printing errors.

Sport Utility Vehicle Commercial Light Truck


N'FERA RU1	36
N'FERA RU5	38
ROADIAN HP	42
ROADIAN HTX RH5	44
ROADIAN AT PRO RA8	48
ROADIAN AT 4X4	50
ROADIAN HT	52
ROADIAN CT8	54
CP321	56

ROADSTONE



N FERA RU1

SPORT PERFORMANCE SUV



3+1 asymmetric grooves -
Improved drainage performance



1 narrow groove on outside -
Handling & steering stability



Silent sipes -
Reduced pattern noise



In/Out balanced rib -
Stability during high speed
driving


BENEFITS



**EXCELLENT
DRY PERFORMANCE**

**EXCELLENT
WET PERFORMANCE**

**EXCELLENT
HANDLING PERFORMANCE**

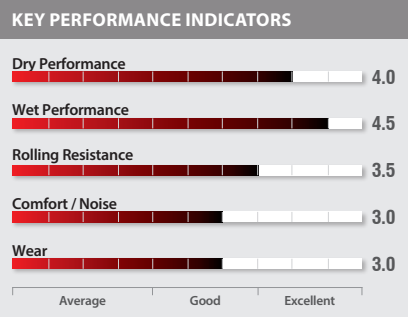

N FERA RU1

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width	S.W.		O.D.		T.D.	SLR	S/W	UTQG	E	M+S
				kgs	lbs		mm	inch	mm	inch						

20 inch

275/35ZR20	102Y XL	13616	50	850	1874	9.5	9.0~11.0	278	10.9	700	27.6	7.9	10.0/32	329	BS	320/AA/A	E
255/35ZR20	97Y XL	13615	50	730	1609	9.0	8.5~10.0	260	10.2	686	27.0	7.9	10.0/32	324	BS	320/AA/A	E
275/40ZR20	106Y XL	12316	50	950	2094	9.5	9.0~10.5	278	10.9	728	28.7	7.9	10.0/32	340	BS	320/AA/A	E
255/45ZR20	105W XL	14288	50	925	2039	8.5	8.0~9.5	255	10.0	738	29.1	7.9	10.0/32	344	BS	320/AA/A	E

19 inch

235/45ZR19	95W	12309	51	690	1521	8.0	7.5~9.0	236	9.3	695	27.4	7.9	10.0/32	325	BS	320/AA/A	E
255/55R19	111V XL	13623	50	1090	2403	8.0	7.0~9.0	265	10.4	763	30.0	7.9	10.0/32	351	BS	320/AA/A	E
235/55R19	105V XL	12317	50	925	2039	7.5	6.5~8.5	245	9.6	741	29.2	7.9	10.0/32	343	BS	320/AA/A	E
225/55R19	99H	13610	51	775	1709	7.0	6.0~8.0	233	9.2	731	28.8	7.9	10.0/32	339	BS	320/AA/A	E

18 inch

235/45ZR18	98W XL	12324	50	750	1653	8.0	7.5~9.0	236	9.3	669	26.3	7.9	10.0/32	312	BS	320/AA/A	E
255/55ZR18	109W XL	12301	50	1030	2271	8.0	7.0~9.0	265	10.4	737	29.0	7.9	10.0/32	338	BS	320/AA/A	E
235/55R18	100V	13622	51	800	1764	7.5	6.5~8.5	245	9.6	715	28.2	7.9	10.0/32	330	BS	320/AA/A	E
235/55R18	100V	17915	51	800	1764	7.5	6.5~8.5	245	9.6	715	28.2	7.9	10.0/32	330	BS	320/AA/A	E
235/60R18	103V	12328	51	875	1929	7.0	6.5~8.5	240	9.4	739	29.1	7.9	10.0/32	339	BS	320/AA/A	E
225/60ZR18	100W	17934	51	800	1764	6.5	6.0~8.0	228	9.0	727	28.6	7.9	10.0/32	334	BS	320/AA/A	E


17 inch

235/55R17	99V	13618	51	775	1709	7.5	6.5~8.5	245	9.6	690	27.2	7.9	10.0/32	317	BS	320/AA/A	E
255/60R17	106V	12318	51	950	2094	7.5	7.0~9.0	260	10.2	738	29.1	7.9	10.0/32	336	BS	320/AA/A	E
225/60R17	99H	13611	51	775	1709	6.5	6.0~8.0	228	9.0	702	27.6	7.9	10.0/32	322	BS	320/AA/A	E
225/60R17	99H	17924	51	775	1709	6.5	6.0~8.0	228	9.0	702	27.6	7.9	10.0/32	322	BS	320/AA/A	E

• Our company is entitled to make any change on any information in this catalogue, without further notice.
• All figures are for reference; our company is not responsible for printing errors.

N FERA RU5


LUXURY COMFORT SUV



4 Wide longitudinal grooves -
Improved drainage performance



Center block -
Stability during high speed
driving



Micro groove -
Optimized traction performance



Applying 2 ribs -
Delivers higher stability

BENEFITS



**EXCELLENT
DRY PERFORMANCE**




**EXCELLENT
WET PERFORMANCE**



BETTER COMFORT

KEY PERFORMANCE INDICATORS

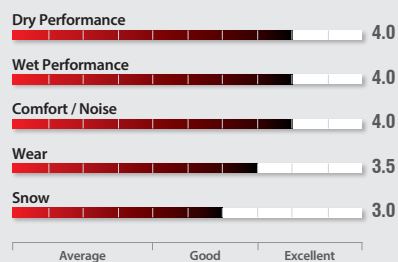

N FERA RU5

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.		SLR.	S/W	UTQG	E	M+S
				kgs	lbs													
22 inch																		
275/40ZR22	108 Y XL	10431	50	1000	2205	9.5	9.0~11.0	278	10.9	779	30.7	8.3	10.5/32	366	BS	500/A/A	E	M+S
20 inch																		
315/35ZR20	110W XL	14023	50	1060	2337	11.0	10.5~12.5	320	12.6	728	28.7	7.9	10.0/32	340	BS	500/A/A	E	M+S
295/35ZR20	105 Y XL	10418	50	925	2039	10.5	10.0~11.5	301	11.9	714	28.1	8.3	10.5/32	335	BS	500/A/A	E	M+S
275/40ZR20	106W XL	12617	50	950	2094	9.5	9.0~10.5	278	10.9	728	28.7	7.9	10.0/32	340	BS	500/A/A	E	M+S
255/40ZR20	101 Y XL	10422	50	825	1819	9.0	8.5~10.0	260	10.2	712	28.0	8.3	10.5/32	334	BS	500/A/A	E	M+S
275/45R20	110 V XL	12608	50	1060	2337	9.0	8.5~10.5	273	10.7	756	29.8	7.9	10.0/32	351	BS	500/A/A	E	M+S
255/45R20	105 V XL	12606	50	925	2039	8.5	8.0~9.5	255	10.0	738	29.1	7.9	10.0/32	344	BS	500/A/A	E	M+S
285/50ZR20	116W XL	10423	50	1250	2756	9.0	8.0~10.0	297	11.7	794	31.3	8.3	10.5/32	366	BS	500/A/A	E	M+S
275/50ZR20	113W XL	10424	50	1150	2535	8.5	7.5~9.5	284	11.2	784	30.9	8.3	10.5/32	362	BS	500/A/A	E	M+S
265/50R20	111 V XL	14021	50	1090	2403	8.5	7.5~9.5	277	10.9	774	30.5	7.9	10.0/32	358	BS	500/A/A	E	M+S
255/50ZR20	109W XL	14012	50	1030	2271	8.0	7.0~9.0	265	10.4	764	30.1	7.9	10.0/32	354	BS	500/A/A	E	M+S
245/50R20	102 V	14070	51	850	1874	7.5	7.0~8.5	253	10.0	754	29.7	7.9	10.0/32	350	BS	500/A/A	E	M+S
255/55R20	107 V	15092	51	975	2149	8.0	7.0~9.0	265	10.4	788	31.0	7.9	10.0/32	364	BS	500/A/A	E	M+S
235/55R20	105 V XL	14016	50	925	2039	7.5	6.5~8.5	245	9.6	766	30.2	7.9	10.0/32	355	BS	500/A/A	E	M+S
19 inch																		
255/50ZR19	107W XL	14434	50	975	2149	8.0	7.0~9.0	265	10.4	739	29.1	7.9	10.0/32	342	BS	500/A/A	E	M+S
235/50R19	103 V XL	14058	50	875	1929	7.5	6.5~8.5	245	9.6	719	28.3	7.9	10.0/32	334	BS	500/A/A	E	M+S
275/55R19	111 V	14057	51	1090	2403	8.5	7.5~9.5	284	11.2	785	30.9	7.9	10.0/32	360	BS	500/A/A	E	M+S
255/55ZR19	111W XL	14034	50	1090	2403	8.0	7.0~9.0	265	10.4	763	30.0	7.9	10.0/32	351	BS	500/A/A	E	M+S
245/55R19	103 V	14059	51	875	1929	7.5	7.0~8.5	253	10.0	753	29.6	7.9	10.0/32	347	BS	500/A/A	E	M+S
235/55ZR19	105W XL	13122	50	925	2039	7.5	6.5~8.5	245	9.6	741	29.2	7.9	10.0/32	343	BS	500/A/A	E	M+S

• Our company is entitled to make any change on any information in this catalogue, without further notice.
• All figures are for reference; our company is not responsible for printing errors.

N FERA RU5

LUXURY COMFORT SUV



4 Wide longitudinal grooves -
Improved drainage performance



Center block -
Stability during high speed
driving



Micro groove -
Optimized traction performance



Applying 2 ribs -
Delivers higher stability

BENEFITS



**EXCELLENT
DRY PERFORMANCE**




**EXCELLENT
WET PERFORMANCE**



BETTER COMFORT

KEY PERFORMANCE INDICATORS

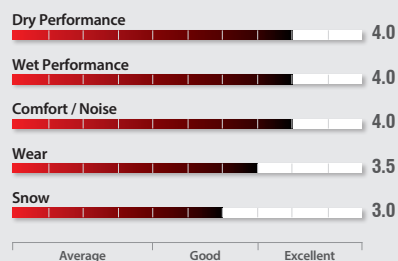

N FERA RU5

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.		SLR	S/W	UTQG	E	M+S
				kgs	lbs	Range	mm	inch	mm	inch	mm	/32"	mm					

18 inch

255/55R18	109 V XL	12605	50	1030	2271	8.0	7.0~9.0	265	10.4	737	29.0	7.9	10.0/32	338	BS	500/A/A	E	M+S
P235/55R18	102 V XL	14435	50	850	1874	7.5	6.5~8.5	245	9.6	715	28.2	7.9	10.0/32	330	BS	500/A/A	E	M+S
225/55R18	98 V	13120	51	750	1653	7.0	6.0~8.0	233	9.2	705	27.8	7.9	10.0/32	326	BS	500/A/A	E	M+S
225/55R18	102 V XL	14068	50	850	1874	7.0	6.0~8.0	233	9.2	705	27.8	7.9	10.0/32	326	BS	500/A/A	E	M+S
225/55R18	98 V	18440	51	750	1653	7.0	6.0~8.0	233	9.2	705	27.8	7.9	10.0/32	326	BS	500/A/A	E	M+S
215/55R18	99 V XL	16368	50	775	1709	7.0	6.0~7.5	226	8.9	693	27.3	7.5	9.4/32	315	BS	500/A/A	E	M+S
285/60R18	116 V	14022	51	1250	2756	8.5	8.0~10.0	292	11.5	799	31.5	7.9	10.0/32	362	BS	500/A/A	E	M+S
P265/60R18	109 V	12615	51	1030	2271	8.0	7.5~9.5	272	10.7	775	30.5	7.9	10.0/32	353	BS	500/A/A	E	M+S
255/60R18	112 V XL	14391	50	1120	2469	7.5	7.0~9.0	260	10.2	763	30.0	7.9	10.0/32	348	BS	500/A/A	E	M+S
P245/60R18	104 V	12613	51	900	1984	7.0	7.0~8.5	248	9.8	751	29.6	7.9	10.0/32	344	BS	500/A/A	E	M+S
235/60R18	107 V XL	12612	50	975	2149	7.0	6.5~8.5	240	9.4	739	29.1	7.9	10.0/32	339	BS	500/A/A	E	M+S
235/65R18	110 V XL	14011	50	1060	2337	7.0	6.5~8.5	240	9.4	763	30.0	7.9	10.0/32	348	BS	500/A/A	E	M+S

17 inch

235/55R17	103 V XL	14010	50	875	1929	7.5	6.5~8.5	245	9.6	690	27.2	7.9	10.0/32	317	BS	500/A/A	E	M+S
P235/60R17	103 V XL	12611	50	875	1929	7.0	6.5~8.5	240	9.4	714	28.1	7.9	10.0/32	326	BS	500/A/A	E	M+S
235/60R17	106 V XL	15045	50	950	2094	7.0	6.5~8.5	240	9.4	714	28.1	7.9	10.0/32	326	BS	500/A/A	E	M+S
225/60R17	103 V XL	13119	50	875	1929	6.5	6.0~8.0	228	9.0	702	27.6	7.9	10.0/32	322	BS	500/A/A	E	M+S
235/65R17	108 V XL	12600	50	1000	2205	7.0	6.5~8.5	240	9.4	738	29.1	7.9	10.0/32	336	BS	500/A/A	E	M+S
225/65R17	106 V XL	14009	50	950	2094	6.5	6.0~8.0	228	9.0	724	28.5	7.9	10.0/32	330	BS	500/A/A	E	M+S

16 inch

235/60R16	100 V	14015	51	800	1764	7.0	6.5~8.5	240	9.4	688	27.1	7.9	10.0/32	313	BS	500/A/A	E	M+S
215/65R16	102 H XL	14014	50	850	1874	6.5	6.0~7.5	221	8.7	686	27.0	7.9	10.0/32	312	BS	500/A/A	E	M+S

* Our company is entitled to make any change on any information in this catalogue, without further notice.
* All figures are for reference; our company is not responsible for printing errors.

ROADIAN HP

LUXURY SUV (TUNE-UP)



V shaped pattern -
Enhanced grip on any roads



5 random pitch variation -
Reduced pattern noise



Wide & deep directional grooves -
Excellent drainage & braking



Large shoulder blocks -
Maximize cornering grip

BENEFITS




**EXCELLENT
DRY PERFORMANCE**



**EXCELLENT
HANDLING PERFORMANCE**

KEY PERFORMANCE INDICATORS

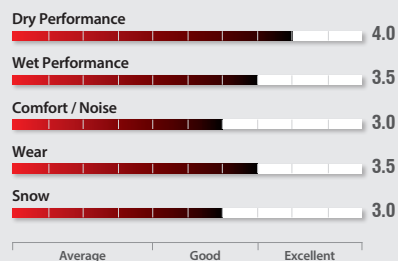

ROADIAN HP

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.		SLR	S/W	UTQG	E	M+S
				kgs	lbs	Range		mm	inch	mm	inch	mm	/32"					
22 inch																		
285/35R22	106 V XL	15472	50	950	2094	10.0	9.5~11.0	290	11.4	759	29.9	8.7	11.0/32	358	BS	460/A/A	E	M+S
265/35R22	102 V XL	15456	50	850	1874	9.5	9.0~10.5	271	10.7	745	29.3	8.7	11.0/32	353	BS	460/A/A	E	M+S
285/45R22	114 V XL	15466	50	1180	2601	9.5	9.0~10.5	285	11.2	815	32.1	8.7	11.0/32	380	BS	460/A/A	E	M+S
20 inch																		
275/40R20	106 V XL	15470	50	950	2094	9.5	9.0~10.5	278	10.9	728	28.7	8.7	11.0/32	340	BS	460/A/A	E	M+S
295/45R20	114 V XL	15459	50	1180	2601	10.0	9.5~11.0	296	11.7	774	30.5	8.7	11.0/32	358	BS	460/A/A	E	M+S
275/45R20	110 V XL	15454	50	1060	2337	9.0	8.5~10.5	273	10.7	756	29.8	8.7	11.0/32	351	BS	460/A/A	E	M+S
265/45R20	108 V XL	15468	50	1000	2205	9.0	8.5~10.0	266	10.5	746	29.4	8.7	11.0/32	347	BS	460/A/A	E	M+S
285/50R20	116 V XL	15473	50	1250	2756	9.0	8.0~10.0	297	11.7	794	31.3	8.7	11.0/32	366	BS	460/A/A	E	M+S
265/50R20	111 V XL	15469	50	1090	2403	8.5	7.5~9.5	277	10.9	774	30.5	8.7	11.0/32	358	BS	460/A/A	E	M+S
255/50R20	109 V XL	15467	50	1030	2271	8.0	7.0~9.0	265	10.4	764	30.1	8.7	11.0/32	354	BS	460/A/A	E	M+S
275/55R20	117 V XL	15471	50	1285	2833	8.5	7.5~9.5	284	11.2	810	31.9	8.7	11.0/32	372	BS	460/A/A	E	M+S
19 inch																		
285/45R19	111 V XL	11009	50	1090	2403	9.5	9.0~10.5	285	11.2	739	29.1	8.7	11.0/32	342	BS	460/A/A	E	M+S
255/50R19	107 V XL	11010	50	975	2149	8.0	7.0~9.0	265	10.4	739	29.1	8.7	11.0/32	342	BS	460/A/A	E	M+S
18 inch																		
255/55R18	109 V XL	15558	50	1030	2271	8.0	7.0~9.0	265	10.4	737	29.0	8.7	11.0/32	338	BS	460/A/A	E	M+S
285/60R18	116 V	15455	44	1250	2756	8.5	8.0~10.0	292	11.5	799	31.5	8.7	11.0/32	362	BS	460/A/A	E	M+S
265/60R18	110 H	15608	44	1060	2337	8.0	7.5~9.5	272	10.7	775	30.5	8.7	11.0/32	353	BS	460/A/A	E	M+S
17 inch																		
275/55R17	109 V	11577	44	1030	2271	8.5	7.5~9.5	284	11.2	734	28.9	8.7	11.0/32	334	BS	460/A/A	E	M+S
255/60R17	106 V	11006	44	950	2094	7.5	7.0~9.0	260	10.2	738	29.1	8.7	11.0/32	336	BS	460/A/A	E	M+S
255/65R17	114 H XL	11576	50	1180	2601	7.5	7.0~9.0	260	10.2	764	30.1	8.7	11.0/32	346	BS	460/A/A	E	M+S
235/65R17	108 V XL	15465	50	1000	2205	7.0	6.5~8.5	240	9.4	738	29.1	8.7	11.0/32	336	BS	460/A/A	E	M+S
16 inch																		
235/60R16	100 V	11004	44	800	1764	7.0	6.5~8.5	240	9.4	688	27.1	8.7	11.0/32	313	BS	460/A/A	E	M+S
235/60R16	100 V	17937	44	800	1764	7.0	6.5~8.5	240	9.4	688	27.1	8.7	11.0/32	313	BS	460/A/A	E	M+S
215/65R16	102 H XL	11575	50	850	1874	6.5	6.0~7.5	221	8.7	686	27.0	8.7	11.0/32	312	BS	460/A/A	E	M+S

• Our company is entitled to make any change on any information in this catalogue, without further notice.
• All figures are for reference; our company is not responsible for printing errors.

ROADIAN HTX RH5

LUXURY HIGHWAY TERRAIN SUV / LTR



Increased sipe density with zigzag tread - Enhanced traction & braking



Large shoulder block - Enhanced handling performance



Unique sipe in groove - Mud extraction performance




Multi sequenced center & shoulder rib - Increased noise reduction & wear protection

BENEFITS

SUV



PICK UP

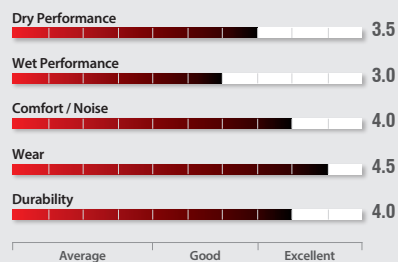**BETTER COMFORT & LOW NOISE****IMPROVED DURABILITY****LONG LASTING TREAD LIFE****KEY PERFORMANCE INDICATORS****ROADIAN HTX RH5**

Size	LI & SR	Code	P R	Max. Psi	Max. Load				Rim Width	S.W.		O.D.		T.D.		SLR	S/W	UTQG	E	M+S	
					kgs		lbs			mm	inch	mm	inch	mm	/32"						
					S	D	S	D													
20 inch																					
275/55R20	113 T	13145	4	51	1150		2535		8.5	7.5~9.5	284	11.2	810	31.9	9.5	12.0/32	372	BS	640/A/A	E	M+S
275/60R20	115 S	13144	4	51	1215		2679		8.0	7.5~9.5	279	11.0	838	33.0	9.5	12.0/32	383	BS	640/A/A	E	M+S
19 inch																					
255/60R19	109 H	14327	4	51	1030		2271		7.5	7.0~9.0	260	10.2	789	31.1	9.5	12.0/32	361	BS	640/A/A	E	M+S
18 inch																					
235/55R18	104 V XL	13372	4	50	900		1984		7.5	6.5~8.5	245	9.6	715	28.2	8.7	11.0/32	330	BS	640/A/A	E	M+S
285/60R18	116 V	13667	4	51	1250		2756		8.5	8.0~10.0	292	11.5	799	31.5	9.5	12.0/32	362	BS	640/A/A	E	M+S
265/60R18	110 H	13147	4	51	1060		2337		8.0	7.5~9.5	272	10.7	775	30.5	9.5	12.0/32	353	BS	640/A/A	E	M+S
245/60R18	105 H	13140	4	51	925		2039		7.0	7.0~8.5	248	9.8	751	29.6	8.7	11.0/32	344	BS	640/A/A	E	M+S
235/60R18	103 V	13136	4	51	875		1929		7.0	6.5~8.5	240	9.4	739	29.1	8.7	11.0/32	339	BS	640/A/A	E	M+S
275/65R18	116 T	11720	4	51	1250		2756		8.0	7.5~9.5	279	11.0	815	32.1	9.5	12.0/32	369	BS	640/A/A	E	M+S
265/65R18	114 S	13139	4	51	1180		2601		8.0	7.5~9.5	272	10.7	801	31.5	9.5	12.0/32	363	BS	640/A/A	E	M+S
235/65R18	110 H XL	14398	4	50	1060		2337		7.0	6.5~8.5	240	9.4	763	30.0	8.7	11.0/32	348	BS	640/A/A	E	M+S
265/70R18	116 S	13670	4	51	1250		2756		8.0	7.0~9.0	272	10.7	829	32.6	9.5	12.0/32	374	BS	640/A/A	E	M+S
255/70R18	113 T	13134	4	51	1150		2535		7.5	6.5~8.5	260	10.2	815	32.1	9.5	12.0/32	369	BS	640/A/A	E	M+S
17 inch																					
235/60R17	102 V	14680	4	51	850		1874		7.0	6.5~8.5	240	9.4	714	28.1	8.7	11.0/32	326	BS	640/A/A	E	M+S
225/60R17	99 V	14684	4	51	775		1709		6.5	6.0~8.0	228	9.0	702	27.6	8.7	11.0/32	322	BS	640/A/A	E	M+S
285/65R17	116 S	13669	4	51	1250		2756		8.5	8.0~10.0	292	11.5	802	31.6	9.5	12.0/32	361	BS	640/A/A	E	M+S
275/65R17	115 T	13668	4	51	1215		2679		8.0	7.5~9.5	279	11.0	790	31.1	9.5	12.0/32	356	BS	640/A/A	E	M+S
265/65R17	112 H	13141	4	51	1120		2469		8.0	7.5~9.5	272	10.7	776	30.6	9.5	12.0/32	351	BS	640/A/A	E	M+S
245/65R17	111 H XL	14396	4	50	1090		2403		7.0	7.0~8.5	248	9.8	750	29.5	8.7	11.0/32	341	WS	640/A/A	E	M+S
235/65R17	108 H XL	14399	4	50	1000		2205		7.0	6.5~8.5	240	9.4	738	29.1	8.7	11.0/32	336	BS	640/A/A	E	M+S
225/65R17	102 H	13131	4	51	850		1874		6.5	6.0~8.0	228	9.0	724	28.5	8.7	11.0/32	330	BS	640/A/A	E	M+S
* 265/70R17	115 T SL	11455	4	51	1215		2679		8.0	7.0~9.0	270	10.6	802	31.6	9.5	12.0/32	361	WS	640/A/B	E	M+S
245/70R17	110 T	11729	4	51	1060		2337		7.0	6.5~8.0	248	9.8	776	30.6	9.5	12.0/32	351	WS	640/A/A	E	M+S

*Available from the 1st Quarter of 2022

• Our company is entitled to make any change on any information in this catalogue, without further notice.
 • All figures are for reference; our company is not responsible for printing errors.

ROADIAN HTX RH5

LUXURY HIGHWAY TERRAIN SUV / LTR



Increased sipe density with zigzag tread - Enhanced traction & braking



Large shoulder block - Enhanced handling performance



Unique sipe in groove - Mud extraction performance




Multi sequenced center & shoulder rib - Increased noise reduction & wear protection

BENEFITS**BETTER COMFORT & LOW NOISE****IMPROVED DURABILITY****LONG LASTING TREAD LIFE**

SUV



PICK UP

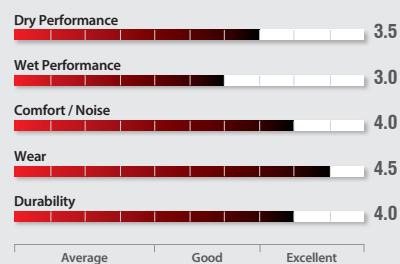KEY PERFORMANCE INDICATORS**ROADIAN HTX RH5**

Size	LI & SR	Code	P	R	Max. Load				Rim Width		S.W.		O.D.		T.D.		SLR	S/W	UTQG	E	M+S
					kgs		lbs		Range	mm	inch	mm	inch	mm	/32"	mm					
					S	D	S	D													
16 inch																					
275/70R16	114 S	10128	4	51	1180	2601	8.0	7.0~9.0	277	10.9	790	31.1	9.5	12.0/32	353	BS	640/A/A	E	M+S		
275/70R16	114 S	13970	4	51	1180	2601	8.0	7.0~9.0	279	11.0	792	31.2	9.5	12.0/32	353	BS	640/A/A	E	M+S		
265/70R16	112 S	11716	4	51	1120	2469	8.0	7.0~9.0	272	10.7	778	30.6	9.5	12.0/32	348	WS	640/A/A	E	M+S		
* 255/70R16	111 S	11714	4	51	1090	2403	7.5	6.5~8.5	260	10.2	764	30.1	9.5	12.0/32	343	WS	640/A/A	E	M+S		
245/70R16	111 T XL	14397	4	50	1090	2403	7.0	6.5~8.0	248	9.8	750	29.5	9.5	12.0/32	337	WS	640/A/A	E	M+S		
235/70R16	106 T	11725	4	51	950	2094	7.0	6.0~8.0	240	9.4	736	29.0	9.5	12.0/32	332	WS	640/A/A	E	M+S		
225/70R16	103 T	12692	4	51	875	1929	6.5	6.0~7.5	228	9.0	722	28.4	9.5	12.0/32	326	WS	640/A/A	E	M+S		
265/75R16	116 T	13127	4	51	1250	2756	7.5	7.0~9.0	267	10.5	804	31.7	9.5	12.0/32	358	WS	640/A/A	E	M+S		
LT245/75R16	120/116 Q	11851	10	80	1380 1260	3042 2778	7.0	6.5~8.0	248	9.8	774	30.5	10.7	13.5/32	346	BS		E	M+S		
245/75R16	111 S	13130	4	51	1090	2403	7.0	6.5~8.0	248	9.8	774	30.5	9.5	12.0/32	346	WS	640/A/A	E	M+S		
LT235/85R16	120/116 Q	11859	10	80	1380 1260	3042 2778	6.5	6.0~7.5	235	9.3	806	31.7	10.7	13.5/32	359	BS		E	M+S		
15 inch																					
31x10.5R15LT	109 S	14007	6	50	1030	2270	8.5	7.0~9.0	268	10.6	775	30.5	10.7	13.5/32	344	BS		E	M+S		
265/70R15	112 S	13132	4	51	1120	2469	8.0	7.0~9.0	272	10.7	753	29.6	9.5	12.0/32	335	WS	640/A/A	E	M+S		
LT255/70R15	113/110 S	13971	8	65	1150 1060	2535 2335	7.5	6.5~8.0	260	10.2	739	29.1	10.7	13.5/32	330	BS		E	M+S		
* 255/70R15	108 H	15057	4	51	1000	2205	7.5	6.5~8.5	260	10.2	739	29.1	9.5	12.0/32	330	BS	640/A/A	E	M+S		
225/70R15	100 S	13137	4	51	800	1764	6.5	6.0~7.5	228	9.0	697	27.4	9.5	12.0/32	314	WS	640/A/A	E	M+S		
235/75R15	109 S XL	13128	4	50	1030	2271	6.5	6.0~8.0	235	9.3	733	28.9	9.5	12.0/32	328	WS	640/A/A	E	M+S		


*Available from the 1st Quarter of 2022

• Our company is entitled to make any change on any information in this catalogue, without further notice.

• All figures are for reference; our company is not responsible for printing errors.

ROADIAN AT PRO RA8

PREMIUM ALL TERRAIN SUV / LTR

Dual block -
Prevents gravel from being
caughtMicro grooves -
Enhanced traction performanceStaggered center rib -
Biting edges on off roadsWide shoulder block -
Enhanced handling performance

SUV


LTV

BENEFITS

SUV



PICK UP

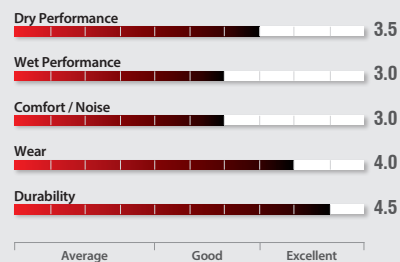**IMPROVED DURABILITY****LONG LASTING TREAD LIFE****EXCELLENT OFF ROAD
PERFORMANCE****KEY PERFORMANCE INDICATORS****ROADIAN AT PRO RA8**

Size	LI & SR	Code	P	R	Max. Psi	Max. Load				Rim Width		S.W.		O.D.		T.D.		SLR	S/W	UTQG	E	M+S
						kgs		lbs		Range	mm	inch	mm	inch	mm	/32"	mm					
						S	D	S	D													
20 inch																						
 265/50R20	111 T XL	14729	4	50	1090		2403		8.5	7.5~9.5	277	10.9	774	30.5	9.9	12.5/32	358	BS	560/A/B	E	M+S	
 275/55R20	117 T XL	12783	4	50	1285		2833		8.5	7.5~9.5	284	11.2	810	31.9	9.9	12.5/32	372	BS	560/A/B	E	M+S	
18 inch																						
 265/60R18	110 T	13123	4	51	1060		2337		8.0	7.5~9.5	272	10.7	775	30.5	10.3	13.0/32	353	BS	560/A/B	E	M+S	
17 inch																						
 265/65R17	112 T	12785	4	51	1120		2469		8.0	7.5~9.5	272	10.7	776	30.6	10.3	13.0/32	351	WS	560/A/B	E	M+S	
	265/65R17	112 T	13676	4	51	1120		2469		8.0	7.5~9.5	272	10.7	776	30.6	10.3	13.0/32	351	BS	560/A/B	E	M+S
 245/65R17	111 S XL	14436	4	50	1090		2403		7.0	7.0~8.5	248	9.8	750	29.5	10.3	13.0/32	341	BS	560/A/B	E	M+S	
 *P285/70R17	117 T	16061	4	51	1285		2833		8.5	7.5~9.5	292	11.5	836	32.9	10.3	13.0/32	374	BS	560/A/B	E	M+S	
16 inch																						
	275/70R16	114 S	13205	4	51	1180		2601		8.0	7.0~9.0	279	11.0	792	31.2	10.3	13.0/32	353	BS	560/A/B	E	M+S
 265/70R16	112 S	12758	4	51	1120		2469		8.0	7.0~9.0	272	10.7	778	30.6	10.3	13.0/32	348	WS	560/A/B	E	M+S	
	LT265/70R16	117/114 S	13221	8	65	1285	1180	2835	2600	8.0	7.0~8.5	272	10.7	778	30.6	12.7	16.0/32	348	BS		E	M+S
 255/70R16	111 S	12760	4	51	1090		2403		7.5	6.5~8.5	260	10.2	764	30.1	10.3	13.0/32	343	WS	560/A/B	E	M+S	
	245/70R16	107 S	13226	4	51	975		2149		7.0	6.5~8.0	248	9.8	750	29.5	10.3	13.0/32	337	BS	560/A/B	E	M+S
 245/70R16	111 S XL	14393	4	50	1090		2403		7.0	6.5~8.0	248	9.8	750	29.5	10.3	13.0/32	337	BS	560/A/B	E	M+S	
 235/70R16	106 S	12764	4	51	950		2094		7.0	6.0~8.0	240	9.4	736	29.0	10.3	13.0/32	332	WS	560/A/B	E	M+S	
	235/70R16	106 S	13216	4	51	950		2094		7.0	6.0~8.0	240	9.4	736	29.0	10.3	13.0/32	332	BS	560/A/B	E	M+S
	225/70R16	103 T	13203	4	51	875		1929		6.5	6.0~7.5	228	9.0	722	28.4	10.3	13.0/32	326	BS	560/A/B	E	M+S
 265/75R16	116 S	12759	4	51	1250		2756		7.5	7.0~9.0	267	10.5	804	31.7	10.3	13.0/32	358	WS	560/A/B	E	M+S	
	LT265/75R16	123/120 R	13223	10	80	1550	1400	3415	3085	7.5	7.0~8.0	267	10.5	804	31.7	12.7	16.0/32	358	BS		E	M+S
15 inch																						
	31x10.5R15LT	109 S	13224	6	50	1030		2270		8.5	7.0~9.0	268	10.6	775	30.5	12.7	16.0/32	344	BS		E	M+S
	LT235/75R15	104/101 S	13219	6	50	900	825	1985	1820	6.5	6.0~7.0	235	9.3	733	28.9	12.7	16.0/32	328	BS		E	M+S
	LT215/75R15	100/97 S	13206	6	50	800	730	1765	1610	6.0	5.5~7.0	216	8.5	703	27.7	12.7	16.0/32	316	BS		E	M+S

*Available from the 2nd Quarter of 2022

• Our company is entitled to make any change on any information in this catalogue, without further notice.

• All figures are for reference; our company is not responsible for printing errors.

Meet the severe snow service requirements of the USTMA (U.S. Tire Manufacturers Association) and RAC (Rubber Association of Canada) and are branded with three-peak mountain snowflake (3PMSF) symbol.

ROADIAN AT 4x4

PREMIUM ALL TERRAIN TRUCK, 4X4 & SUV




Solid & Wide Center Block - Wide tread center block and solid block shape make good wear and steering performances



Optimized Groove Ratio - Optimal groove see-through makes balanced on & off road driving performances



Single Pitch Type - Single pitch type provides good handling and protects from irregular wear



Raised Off Shoulder Design - Raised off shoulder profile can protect abrasive shoulder wear on excessive driving

BENEFITS



IMPROVED HANDLING & BRAKING PERFORMANCE




ENHANCED DRIVING DURABILITY



IMPROVED FUEL CONSUMPTION

KEY PERFORMANCE INDICATORS

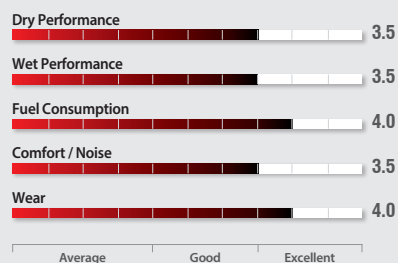

ROADIAN AT 4x4

Size	LI & SR	Code	P R	Max. Psi	Max. Load				Rim Width	S.W.		O.D.		T.D.		SLR.	S/W	E	M+S	
					kgs		lbs			mm	inch	mm	inch	mm	/32"					mm
					S	D	S	D												
20 inch																				
285/50R20	116 S XL	16702	4	50	1250		2756		9.0	8.0~10.0	297	11.7	794	31.3	9.0	11.3/32	366	BS	E M+S	
265/50R20	111 T XL	16701	4	50	1090		2403		8.5	7.5~9.5	277	10.9	774	30.5	9.0	11.3/32	358	BS	E M+S	
17 inch																				
265/65R17	112 T	16424	4	51	1120		2469		8.0	7.5~9.5	272	10.7	776	30.6	9.0	11.3/32	351	BS	E M+S	
245/65R17	111 T XL	16420	4	50	1090		2403		7.0	7.0~8.5	248	9.8	750	29.5	9.0	11.3/32	341	BS	E M+S	
16 inch																				
265/70R16	112 H	16426	4	51	1120		2469		8.0	7.0~9.0	272	10.7	778	30.6	9.0	11.3/32	348	BS	E M+S	
245/70R16	107 T	16421	4	51	975		2149		7.0	6.5~8.0	248	9.8	750	29.5	9.0	11.3/32	337	BS	E M+S	
235/70R16	106 T	16417	4	51	950		2094		7.0	6.0~8.0	240	9.4	736	29.0	9.0	11.3/32	332	BS	E M+S	
LT265/75R16	123/120 R	16427	10	80	1550	1400	3415 3085		7.5	7.0~8.0	267	10.5	804	31.7	10.7	13.5/32	358	BS	E M+S	
LT225/75R16	115/112 S	16416	10	80	1215	1120	2680 2470		6.0	6.0~7.0	223	8.8	744	29.3	10.7	13.5/32	335	BS	E M+S	
205/80R16	104 T XL	16414	4	50	900		1984		5.5	5.0~6.5	203	8.0	734	28.9	9.0	11.3/32	331	BS	E M+S	
LT235/85R16	120/116 R	16419	10	80	1380	1260	3042 2778		6.5	6.0~7.5	235	9.3	806	31.7	10.7	13.5/32	359	BS	E M+S	
205R16C	110/108 S	16415	8	65	1060	1000	2337 2205		6.0	5.5~6.5	208	8.2	736	29.0	10.0	12.6/32	332	BS	E M+S	
16 inch																				
31x10.5R15LT	109 S	16428	6	50	1030		2270		8.5	7.0~9.0	268	10.6	775	30.5	10.7	13.5/32	344	BS	E M+S	
265/70R15	112 T	16425	4	51	1120		2469		8.0	7.0~9.0	272	10.7	753	29.6	9.0	11.3/32	335	BS	E M+S	
225/70R15C	112/110 R	17447	8	65	1120	1060	2469 2337		6.5	6.0~7.0	228	9.0	697	27.4	10.0	12.6/32	314	BS	E M+S	
205/70R15	96 T	16413	4	51	710		1565		6.0	5.0~7.0	209	8.2	669	26.3	9.0	11.3/32	303	BS	E M+S	
205/70R15C	104/102 T	17449	6	54	900	850	1984 1874		6.0	5.5~6.5	209	8.2	669	26.3	10.0	12.6/32	303	BS	E M+S	
LT235/75R15	104/101 S	16418	6	50	900	825	1985 1820		6.5	6.0~7.0	235	9.3	733	28.9	10.7	13.5/32	328	BS	E M+S	
14 inch																				
205/70R14C	102/100 T	17448	8	65	850	800	1874 1764		6.0	5.5~6.5	209	8.2	644	25.4	10.0	12.6/32	290	BS	E M+S	

• Our company is entitled to make any change on any information in this catalogue, without further notice.

• All figures are for reference; our company is not responsible for printing errors.

ROADIAN HT


HIGHWAY TERRAIN SUV / LTR

4 Wide longitudinal grooves -
Improved drainage performanceWell balanced kerf -
Improved off road performanceShoulder blocks -
Precise handling & cornering5 random pitch variation -
Reduced pattern noise

BENEFITS

**IMPROVED DURABILITY****LONG LASTING TREAD LIFE****BETTER COMFORT &
LOW NOISE**

KEY PERFORMANCE INDICATORS

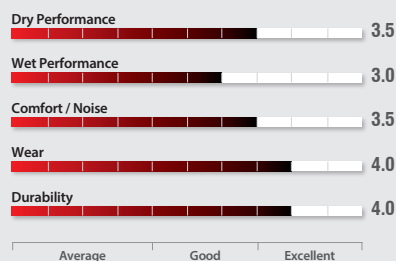

ROADIAN HT

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.		SLR	S/W	UTQG	E	M+S
				kgs	lbs	Range	mm	inch	mm	inch	mm	/32"	mm					

18 inch

P245/60R18	104H	11008	44	900	1984	7.0	7.0~8.5	248	9.8	751	29.6	9.0	11.3/32	344	BS	520/A/B	E	M+S
P235/60R18	102H	11007	44	850	1874	7.0	6.5~8.5	240	9.4	739	29.1	9.0	11.3/32	339	BS	520/A/B	E	M+S
P235/65R18	104H	11214	44	900	1984	7.0	6.5~8.5	240	9.4	763	30.0	9.0	11.3/32	348	BS	520/A/B	E	M+S

17 inch

P235/60R17	102S	11109	44	850	1874	7.0	6.5~8.5	240	9.4	714	28.1	9.0	11.3/32	326	WS	520/A/B	E	M+S
P265/65R17	110S	11113	44	1060	2337	8.0	7.5~9.5	272	10.7	776	30.6	9.0	11.3/32	351	WS	520/A/B	E	M+S
P265/65R17	112S	12521	44	1120	2469	8.0	7.5~9.5	272	10.7	776	30.6	9.0	11.3/32	351	BS	520/A/B	E	M+S
P245/65R17	105S	14952	44	925	2039	7.0	7.0~8.5	248	9.8	750	29.5	9.0	11.3/32	341	WS	520/A/B	E	M+S
P235/65R17	104S	12515	44	900	1984	7.0	6.5~8.5	240	9.4	738	29.1	9.0	11.3/32	336	BS	520/A/B	E	M+S
P235/65R17	103S	14859	44	875	1929	7.0	6.5~8.5	240	9.4	738	29.1	9.0	11.3/32	336	WS	520/A/B	E	M+S
P225/65R17	100H	11213	44	800	1764	6.5	6.0~8.0	228	9.0	724	28.5	9.0	11.3/32	330	BS	520/A/B	E	M+S

16 inch

P275/70R16	114S	14860	44	1180	2601	8.0	7.0~9.0	279	11.0	792	31.2	9.5	12.0/32	353	WS	520/A/B	E	M+S
P265/70R16	112S	12520	44	1120	2469	8.0	7.0~9.0	272	10.7	778	30.6	9.5	12.0/32	348	BS	520/A/B	E	M+S
P265/70R16	112S	14857	44	1120	2469	8.0	7.0~9.0	272	10.7	778	30.6	9.5	12.0/32	348	WS	520/A/B	E	M+S
P255/70R16	109S	14856	44	1030	2271	7.5	6.5~8.5	260	10.2	764	30.1	9.5	12.0/32	343	WS	520/A/B	E	M+S
P245/70R16	107S	12516	44	975	2149	7.0	6.5~8.0	248	9.8	750	29.5	9.5	12.0/32	337	BS	520/A/B	E	M+S
P245/70R16	107S	14855	44	975	2149	7.0	6.5~8.0	248	9.8	750	29.5	9.5	12.0/32	337	WS	520/A/B	E	M+S
P235/70R16	106S	12514	44	950	2094	7.0	6.0~8.0	240	9.4	736	29.0	9.5	12.0/32	332	BS	520/A/B	E	M+S
P235/70R16	104S	14854	44	900	1984	7.0	6.0~8.0	240	9.4	736	29.0	9.5	12.0/32	332	WS	520/A/B	E	M+S
P225/70R16	103T	11958	44	875	1929	6.5	6.0~7.5	228	9.0	722	28.4	9.5	12.0/32	326	BS	520/A/B	E	M+S
P245/75R16	109S	14443	44	1030	2271	7.0	6.0~8.0	248	9.8	774	30.5	9.5	12.0/32	346	WS	520/A/B	E	M+S
P225/75R16	104S	14553	44	900	1984	6.0	6.0~7.5	223	8.8	744	29.3	9.5	12.0/32	335	WS	520/A/B	E	M+S

15 inch

P265/70R15	112S	12519	44	1120	2469	8.0	7.0~9.0	272	10.7	753	29.6	9.5	12.0/32	335	BS	520/A/B	E	M+S
P265/70R15	110S	14429	44	1060	2337	8.0	7.0~9.0	272	10.7	753	29.6	9.5	12.0/32	335	WS	520/A/B	E	M+S
P255/70R15	108S	14428	44	990	2183	7.5	6.5~8.5	260	10.2	739	29.1	9.5	12.0/32	330	WS	520/A/B	E	M+S
P235/75R15	105S	14747	44	920	2028	6.5	5.5~7.0	235	9.3	733	28.9	9.5	12.0/32	328	WS	520/A/B	E	M+S
P225/75R15	102S	11212	44	850	1874	6.0	5.5~7.0	223	8.8	719	28.3	9.5	12.0/32	322	WS	520/A/B	E	M+S
P215/75R15	100S	14546	44	790	1742	6.0	5.5~7.0	216	8.5	703	27.7	9.5	12.0/32	316	WS	520/A/B	E	M+S

• Our company is entitled to make any change on any information in this catalogue, without further notice.
• All figures are for reference; our company is not responsible for printing errors.

ROADIAN CT8

COMMERCIAL LTR



Rib type shoulder blocks -
Given the heavy load of LTR



Square shaped dimple -
Delivers better durability



Biting edge -
Improved traction



Straight groove -
Improved drainage performance

BENEFITS



**EXCELLENT
WET PERFORMANCE**




IMPROVED STABILITY



LONG LASTING TREAD LIFE

KEY PERFORMANCE INDICATORS

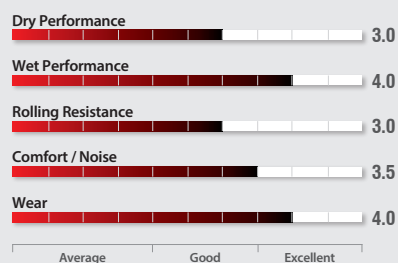

ROADIAN CT8

Size	LI & SR	Code	P R	Max. Psi	Max. Load				Rim Width		S.W.		O.D.		T.D.		SLR	S/W	E	M+S
					kgs		lbs				mm	inch	mm	inch	mm	/32"				
					S	D	S	D												
17 inch																				
* 225/70R17C	108/106 S	10439	6	47	1000	950	2205	2094	6.5	6.0~7.0	228	9.0	748	29.4	9.2	11.6/32	340	BS	E	M+S
16 inch																				
205/75R16C	113/111 R	13795	10	76	1150	1090	2535	2403	5.5	5.5~6.5	203	8.0	714	28.1	9.1	11.5/32	323	BS	E	
205R16C	110/108 S	15065	8	65	1060	1000	2337	2205	6.0	5.5~6.5	208	8.2	736	29.0	9.1	11.5/32	332	BS	E	
15 inch																				
225/70R15C	112/110 R	15064	8	65	1120	1060	2469	2337	6.5	6.0~7.0	228	9.0	697	27.4	9.1	11.5/32	314	BS	E	
225/70R15C	112/110 T	17275	8	65	1120	1060	2469	2337	6.5	6.0~7.0	228	9.0	697	27.4	9.1	11.5/32	314	BS	E	
205/70R15C	106/104 T	13784	8	65	950	900	2094	1984	6.0	5.5~6.5	209	8.2	669	26.3	9.1	11.5/32	303	BS	E	
205/70R15C	104/102 T	15063	6	54	900	850	1984	1874	6.0	5.5~6.5	209	8.2	669	26.3	9.1	11.5/32	303	BS	E	
195R15C	106/104 R	13283	8	65	950	900	2095	1985	5.5	5.0~6.5	198	7.8	691	27.2	9.6	12.1/32	311	BS	E	
195R15C	106/104 R	14506	8	65	950	900	2095	1985	5.5	5.0~6.0	198	7.8	690	27.2	9.6	12.1/32	323	BS	E	
14 inch																				
175/70R14C	95/93 T	13809	6	54	690	650	1521	1433	5.0	4.5~5.5	177	7.0	602	23.7	8.3	10.5/32	274	BS	E	
195R14C	106/104 R	13780	8	65	950	900	2094	1984	5.5	5.0~6.0	198	7.8	666	26.2	8.7	11.0/32	299	BS	E	
195R14C	106/104 R	16050	8	65	950	900	2094	1984	5.5	5.0~6.0	198	7.8	666	26.2	8.7	11.0/32	299	BS	E	
185R14C	102/100 T	13781	8	65	850	800	1874	1764	5.5	5.0~6.0	188	7.4	650	25.6	8.3	10.5/32	293	BS	E	
185R14C	102/100 T	14502	8	65	850	800	1874	1764	5.5	5.0~6.0	188	7.4	650	25.6	8.3	10.5/32	293	BS	E	
13 inch																				
155R13C	90/88 R	14508	8	65	600	560	1323	1235	4.5	4.0~5.0	157	6.2	582	22.9	7.9	10.0/32	263	BS	E	
145R13C	91/89 R	14732	10	80	615	580	1356	1168	4.0	3.5~4.5	147	5.8	562	22.1	7.9	10.0/32	255	BS	E	


*Available from the 2nd Quarter of 2022

• Our company is entitled to make any change on any information in this catalogue, without further notice.

• All figures are for reference; our company is not responsible for printing errors.

CP321

COMMERCIAL LTR



Enhanced shoulder block stiffness -
Excellent handling performance



Solid shoulder block -
Provides handling performance



Interlocking intermediate ribs -
Provides comfort & quiet ride



Premium tread compound -
Excellent wear & traction
performance

BENEFITS




**EXCELLENT
WET PERFORMANCE**



LONG LASTING TREAD LIFE

KEY PERFORMANCE INDICATORS

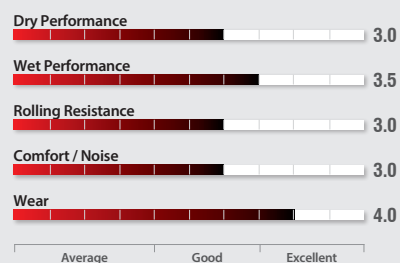

CP321

Size	LI & SR	Code	P R	Max. Psi	Max. Load				Rim Width	S.W.		O.D.		T.D.		SLR	S/W	E	M
					kgs		lbs			mm	inch	mm	inch	mm	/32 "				
					S	D	S	D											

16 inch

195/60R16C	99/97 T	11219	6	54	775	730	1709	1609	6.0	5.5~6.5	201	7.9	640	25.2	8.7	11.0/32	294	BS	E
235/65R16C	115/113 T	12637	8	69	1215	1150	2679	2535	7.0	6.5~7.5	240	9.4	712	28.0	9.2	11.6/32	322	BS	E
225/65R16C	112/110 T	11225	8	70	1120	1060	2469	2337	6.5	6.0~7.0	228	9.0	698	27.5	9.2	11.6/32	317	BS	E
215/65R16C	109/107 T	11224	8	70	1030	975	2271	2149	6.5	6.0~7.0	221	8.7	686	27.0	9.2	11.6/32	312	BS	E
205/65R16C	107/105 R	11111	8	70	975	925	2149	2039	6.0	5.5~6.5	209	8.2	672	26.5	9.2	11.6/32	307	BS	E
195/65R16C	104/102 T	11110	8	70	900	850	1984	1874	6.0	5.5~6.0	201	7.9	660	26.0	8.7	11.0/32	302	BS	E
215/75R16C	116/114 Q	10698	10	85	1250	1180	2756	2601	6.0	5.5~7.0	216	8.5	728	28.7	11.5	14.5/32	329	BS	E
205/75R16C	110/108 R	13352	6	70	1060	1000	2337	2205	5.5	5.5~6.5	203	8.0	714	28.1	11.5	14.5/32	323	BS	E
195/75R16C	110/108 Q	10697	10	85	1060	1000	2337	2205	5.5	5.0~6.0	196	7.7	698	27.5	10.5	13.2/32	317	BS	E
185/75R16C	104/102 T	11227	8	70	900	850	1984	1874	5.0	5.0~6.0	184	7.2	684	26.9	10.7	13.5/32	311	BS	E

15 inch

225/70R15C	112/110 R	11446	8	65	1120	1060	2469	2337	6.5	6.0~7.0	228	9.0	697	27.4	9.8	12.3/32	314	BS	E
195/70R15C	104/102 S	13419	8	65	900	850	1984	1875	6.0	5.0~6.0	201	7.9	655	25.8	9.4	11.8/32	297	BS	E
195/70R15C	104/102 S	14763	8	65	900	850	1984	1875	6.0	5.0~6.0	201	7.9	655	25.8	9.4	11.8/32	297	BS	E

14 inch

175/65R14C	90/88 T	11223	6	54	600	560	1323	1235	5.0	5.0~5.5	177	7.0	584	23.0	8.7	11.0/32	267	BS	E
------------	---------	-------	---	----	-----	-----	------	------	-----	---------	-----	-----	-----	------	-----	---------	-----	----	---

12 inch

145R12LT	80/78 R	13289	6	51	450	425	992	937	4.0	3.5~4.0	147	5.8	543	21.4	6.6	8.2/32	245	BS	
----------	---------	-------	---	----	-----	-----	-----	-----	-----	---------	-----	-----	-----	------	-----	--------	-----	----	--

• Our company is entitled to make any change on any information in this catalogue, without further notice.
• All figures are for reference; our company is not responsible for printing errors.

Winter Tire

<i>EUROVIS Alpine WH1</i>	60
<i>WINGUARD Sport</i>	64
<i>WINGUARD ice Plus</i>	66
<i>WINGUARD ice SUV</i>	68
<i>WINGUARD ice</i>	70
<i>WINGUARD SUV</i>	72
<i>WINGUARD Winspike</i>	74
<i>WINGUARD Winspike SUV</i>	76



EUROVIS Alpine^{WH1}


ALPINE / STUDLESS PCR

3 straight grooves -
Improved drainage performanceFluid lines & block edge -
Improved noise & wear
performanceLarge number of multi sipe -
Enhanced grip on slush & icy road5 random pitch variation -
Reduced pattern noise**BENEFITS**

PC / MID-SIZE



PC / COMPACT

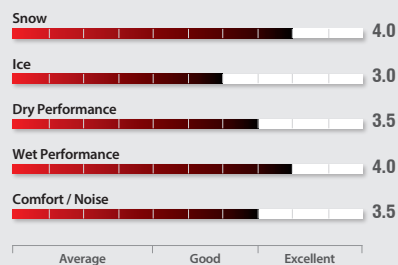**EXCELLENT
SNOW PERFORMANCE****EXCELLENT
DRY PERFORMANCE****EXCELLENT
WET PERFORMANCE****KEY PERFORMANCE INDICATORS****EUROVIS Alpine^{WH1}**

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.		SLR	S/W	E	M+S
				kgs	lbs	Range		mm	inch	mm	inch	mm	/32"				
16 inch																	
225/55R16	95 H	15383	44	690	1521	7.0	6.0~8.0	233	9.2	654	25.7	8.2	10.3/32	300	BS	E	M+S
215/55R16	93 H	15303	44	650	1433	7.0	6.0~7.5	226	8.9	642	25.3	8.2	10.3/32	295	BS	E	M+S
205/55R16	91 T	15297	44	615	1356	6.5	5.5~7.5	214	8.4	632	24.9	8.2	10.3/32	291	BS	E	M+S
205/55R16	91 H	15300	44	615	1356	6.5	5.5~7.5	214	8.4	632	24.9	8.2	10.3/32	291	BS	E	M+S
195/55R16	87 T	15279	44	545	1201	6.0	5.5~7.0	201	7.9	620	24.4	8.2	10.3/32	286	BS	E	M+S
185/55R16	87 T XL	15302	50	545	1201	6.0	5.0~6.5	194	7.6	610	24.0	8.2	10.3/32	283	BS	E	M+S
235/60R16	100 H	15296	44	800	1764	7.0	6.5~8.5	240	9.4	688	27.1	8.2	10.3/32	313	BS	E	M+S
215/60R16	99 H XL	15288	50	775	1709	6.5	6.0~7.5	221	8.7	664	26.1	8.2	10.3/32	304	BS	E	M+S
205/60R16	92 H	15295	44	630	1389	6.0	5.5~7.5	209	8.2	652	25.7	8.2	10.3/32	299	BS	E	M+S
195/60R16	89 H	15287	44	580	1279	6.0	5.5~7.0	201	7.9	640	25.2	8.2	10.3/32	294	BS	E	M+S
185/60R16	86 H	15289	44	530	1168	5.5	5.0~6.5	189	7.4	628	24.7	8.2	10.3/32	290	BS	E	M+S
215/65R16	98 H	15284	44	750	1653	6.5	6.0~7.5	221	8.7	686	27.0	8.2	10.3/32	312	BS	E	M+S
225/70R16	103 H	15305	44	875	1929	6.5	6.0~7.5	228	9.0	722	28.4	8.2	10.3/32	326	BS	E	M+S
215/70R16	100 T	15304	44	800	1764	6.5	5.5~7.0	221	8.7	708	27.9	8.2	10.3/32	321	BS	E	M+S

15 inch

195/50R15	82 H	15371	44	475	1047	6.0	5.5~7.0	201	7.9	577	22.7	8.2	10.3/32	267	BS	E	M+S
195/55R15	85 H	15301	44	515	1135	6.0	5.5~7.0	201	7.9	595	23.4	8.2	10.3/32	274	BS	E	M+S
185/55R15	86 H XL	15373	50	530	1168	6.0	5.0~6.5	194	7.6	585	23.0	8.2	10.3/32	270	BS	E	M+S
205/60R15	91 T	15292	44	615	1356	6.0	5.5~7.5	209	8.2	627	24.7	8.2	10.3/32	286	BS	E	M+S
195/60R15	88 H	15291	44	560	1235	6.0	5.5~7.0	201	7.9	615	24.2	8.2	10.3/32	282	BS	E	M+S
195/60R15	88 T SL	15298	44	560	1235	6.0	5.5~7.0	199	7.8	613	24.1	8.2	10.5/32	281	BS	E	M+S
185/60R15	88 T XL	15378	50	560	1235	5.5	5.0~6.5	189	7.4	603	23.7	8.2	10.3/32	277	BS	E	M+S
175/60R15	81 H	15376	44	462	1019	5.0	5.0~6.0	177	7.0	591	23.3	8.2	10.3/32	272	BS	E	M+S
205/65R15	94 H	15282	44	670	1477	6.0	5.5~7.5	209	8.2	647	25.5	8.2	10.3/32	294	BS	E	M+S
195/65R15	91 H	15280	44	615	1356	6.0	5.5~7.0	201	7.9	635	25.0	8.2	10.3/32	289	BS	E	M+S
195/65R15	91 T	15293	44	615	1356	6.0	5.5~7.0	201	7.9	635	25.0	8.2	10.3/32	289	BS	E	M+S
195/65R15	95 T XL	15381	50	690	1521	6.0	5.5~7.0	201	7.9	635	25.0	8.2	10.3/32	290	BS	E	M+S
185/65R15	88 H	15294	44	560	1235	5.5	5.0~6.5	189	7.4	621	24.4	8.2	10.3/32	284	BS	E	M+S
185/65R15	92 T XL	15380	50	630	1389	5.5	5.0~6.5	189	7.4	621	24.4	8.2	10.3/32	284	BS	E	M+S
175/65R15	84 T	15283	44	500	1102	5.0	5.0~6.0	177	7.0	609	24.0	8.2	10.3/32	279	BS	E	M+S

• Our company is entitled to make any change on any information in this catalogue, without further notice.

• All figures are for reference; our company is not responsible for printing errors.

EUROVIS Alpine^{WH1}

ALPINE / STUDLESS PCR



3 straight grooves -
Improved drainage performance



Fluid lines & block edge -
Improved noise & wear
performance



Large number of multi sipe -
Enhanced grip on slush & icy road



5 random pitch variation -
Reduced pattern noise

BENEFITS



PC / MID-SIZE



PC / COMPACT



**EXCELLENT
SNOW PERFORMANCE**




**EXCELLENT
DRY PERFORMANCE**



**EXCELLENT
WET PERFORMANCE**

KEY PERFORMANCE INDICATORS

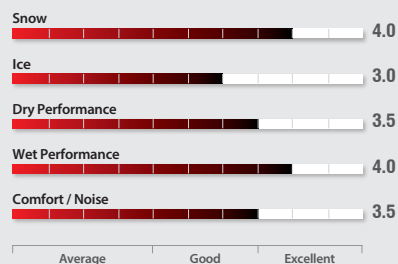

EUROVIS Alpine^{WH1}

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.		SLR	S/W	E	M+S
				kgs	lbs		Range	mm	inch	mm	inch	mm	/32"				
14 inch																	
185/55R14	80 T	15365	44	450	992	6.0	5.0~6.5	194	7.6	560	22.0	8.2	10.3/32	257	BS	E	M+S
185/60R14	82 T	15290	44	475	1047	5.5	5.0~6.5	189	7.4	578	22.8	8.2	10.3/32	264	BS	E	M+S
185/65R14	86 T	15286	44	530	1168	5.5	5.0~6.5	189	7.4	596	23.5	8.2	10.3/32	271	BS	E	M+S
175/65R14	82 T	15285	44	475	1047	5.0	5.0~6.0	177	7.0	584	23.0	8.2	10.3/32	267	BS	E	M+S
175/65R14	86 T XL	15299	50	530	1168	5.0	5.0~6.0	177	7.0	584	23.0	8.2	10.3/32	267	BS	E	M+S
195/70R14	91 T	15370	44	615	1356	6.0	5.0~6.5	201	7.9	630	24.8	8.2	10.3/32	285	BS	E	M+S
185/70R14	88 T	15308	44	560	1235	5.5	4.5~6.0	189	7.4	616	24.3	8.2	10.3/32	279	BS	E	M+S
175/70R14	88 T XL	15306	50	560	1235	5.0	4.5~6.0	177	7.0	602	23.7	8.2	10.3/32	274	BS	E	M+S
165/70R14	81 T	15369	44	462	1019	5.0	4.0~5.5	170	6.7	588	23.2	8.2	10.3/32	268	BS	E	M+S

13 inch

155/70R13	75 T	15363	44	387	853	4.5 4.0~5.0	157	6.2	548	21.6	8.2	10.3/32	250	BS	E	M+S
145/70R13	71 T	15362	44	345	761	4.5 3.5~5.0	150	5.9	534	21.0	8.2	10.3/32	244	BS	E	M+S
155/80R13	79 T	15364	44	437	963	4.5 4.0~5.0	157	6.2	578	22.8	8.2	10.3/32	262	BS	E	M+S

• Our company is entitled to make any change on any information in this catalogue, without further notice.

• All figures are for reference; our company is not responsible for printing errors.

WINGUARD Sport

ULTRA-HIGH PERFORMANCE ALPINE / STUDLESS PCR



4 Wide longitudinal grooves -
Improved drainage performance



Balanced asymmetric design -
Improved traction & cornering



High density multi sipe -
Enhanced grip & braking



5 random pitch variation -
Reduced pattern noise

BENEFITS



**EXCELLENT
HANDLING PERFORMANCE**




**EXCELLENT
DRY PERFORMANCE**



**EXCELLENT
WET PERFORMANCE**

KEY PERFORMANCE INDICATORS

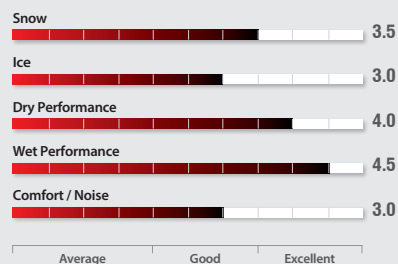

WINGUARD Sport

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.		SLR	S/W	E	M+S
				kgs	lbs	Range	mm	inch	mm	inch	mm	/32"	mm				

19 inch

255/35R19	96 V XL	14128	50	710	1565	9.0	8.5~10.0	260	10.2	661	26.0	8.7	11.0/32	311	BS	E	M+S
275/40R19	105 V XL	13097	50	925	2039	9.5	9.0~10.5	278	10.9	703	27.7	8.7	11.0/32	328	BS	E	M+S
245/40R19	98 V XL	13096	50	750	1653	8.5	8.0~9.5	248	9.8	679	26.7	8.7	11.0/32	318	BS	E	M+S
245/45R19	102 V XL	13100	50	850	1874	8.0	7.5~9.0	243	9.6	703	27.7	8.7	11.0/32	328	BS	E	M+S
235/55R19	105 V XL	14141	50	925	2039	7.5	6.5~8.5	245	9.6	741	29.2	8.7	11.0/32	343	BS	E	M+S

18 inch

255/35R18	94 V XL	14126	50	670	1477	9.0	8.5~10.0	260	10.2	635	25.0	8.7	11.0/32	298	BS	E	M+S
225/40R18	92 V XL	10280	50	630	1389	8.0	7.5~9.0	230	9.1	637	25.1	8.7	11.0/32	299	BS	E	M+S
255/45R18	103 V XL	14125	50	875	1929	8.5	8.0~9.5	255	10.0	687	27.0	8.7	11.0/32	319	BS	E	M+S
245/45R18	100 V XL	13099	50	800	1764	8.0	7.5~9.0	243	9.6	677	26.7	8.7	11.0/32	315	BS	E	M+S
235/45R18	98 V XL	14139	50	750	1653	8.0	7.5~9.0	236	9.3	669	26.3	8.7	11.0/32	312	BS	E	M+S

17 inch

225/45R17	94 V XL	10047	50	670	1477	7.5	7.0~8.5	225	8.9	634	25.0	8.7	11.0/32	295	BS	E	M+S
215/45R17	91 V XL	10242	50	615	1356	7.0	7.0~8.0	213	8.4	626	24.6	8.7	11.0/32	292	BS	E	M+S
205/45R17	88 V XL	14138	50	560	1235	7.0	6.5~7.5	206	8.1	616	24.3	8.7	11.0/32	288	BS	E	M+S
225/50R17	98 V XL	11063	50	750	1653	7.0	6.0~8.0	233	9.2	658	25.9	8.7	11.0/32	305	BS	E	M+S
215/50R17	95 V XL	13101	50	690	1521	7.0	6.0~7.5	226	8.9	648	25.5	8.7	11.0/32	301	BS	E	M+S
205/50R17	93 V XL	10239	50	650	1433	6.5	5.5~7.5	214	8.4	638	25.1	8.7	11.0/32	297	BS	E	M+S
225/55R17	101 V XL	10292	50	825	1819	7.0	6.0~8.0	233	9.2	680	26.8	8.7	11.0/32	313	BS	E	M+S
215/55R17	98 V XL	13103	50	750	1653	7.0	6.0~7.5	226	8.9	668	26.3	8.7	11.0/32	309	BS	E	M+S
215/60R17	96 H	14142	44	710	1565	6.5	6.0~7.5	221	8.7	690	27.2	8.7	11.0/32	317	BS	E	M+S

16 inch

195/45R16	84 H XL	14137	50	500	1102	6.5	6.0~7.5	195	7.7	582	22.9	8.7	11.0/32	272	BS	E	M+S
225/55R16	99 H XL	11434	50	775	1709	7.0	6.0~8.0	233	9.2	654	25.7	8.7	11.0/32	300	BS	E	M+S
215/55R16	97 H XL	11435	50	730	1609	7.0	6.0~7.5	226	8.9	642	25.3	8.7	11.0/32	295	BS	E	M+S
205/55R16	94 V XL	11064	50	670	1477	6.5	5.5~7.5	214	8.4	632	24.9	8.7	11.0/32	291	BS	E	M+S


15 inch

185/60R15	84 T	11438	44	500	1102	5.5	5.0~6.5	189	7.4	603	23.7	8.7	11.0/32	277	BS	E	M+S
-----------	------	-------	----	-----	------	-----	---------	-----	-----	-----	------	-----	---------	-----	----	---	-----

• Our company is entitled to make any change on any information in this catalogue, without further notice.
• All figures are for reference; our company is not responsible for printing errors.

WINGUARD *ice Plus*

PREMIUM NORDIC FRICTION STUDLESS



4Groove + V Groove -
Eliminate snow, slush and water
quickly with V-shape 4 Grooves



Micro Sipe - Improves
performance on ice and snow
with its multiple micro sipes



3D shoulder Design - Provides better
traction on snow with its unique 3D "winter
concept" pattern design on shoulder



3D kerf - A 3D kerf pattern provides
balanced grip force and better
stiffness within the tread block

BENEFITS

PC / FULL-SIZE



PC / MID-SIZE



PC / COMPACT




**EXCELLENT HANDLING &
DRIVING STABILITY**



**IMPROVED ICE TRACTION
PERFORMANCE**



**ENHANCED WET HANDLING
& BRAKING**

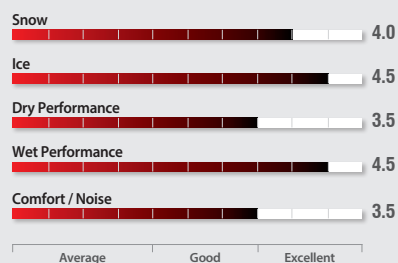KEY PERFORMANCE INDICATORS**WINGUARD** *ice Plus*


Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.		SLR	S/W	E	M+S
				kgs	lbs	Range		mm	inch	mm	inch	mm	/32"				
19 inch																	
245/45R19	102 T XL	16125	50	850	1874	8.0	7.5~9.0	243	9.6	703	27.7	8.7	11.0/32	328	BS	E	M+S
18 inch																	
245/40R18	97 T XL	16118	50	730	1609	8.5	8.0~9.5	248	9.8	653	25.7	8.7	11.0/32	306	BS	E	M+S
235/40R18	95 T XL	16117	50	690	1521	8.5	8.0~9.5	241	9.5	645	25.4	8.7	11.0/32	302	BS	E	M+S
245/45R18	100 T XL	16124	50	800	1764	8.0	7.5~9.0	243	9.6	677	26.7	8.7	11.0/32	315	BS	E	M+S
235/45R18	98 T XL	18548	50	750	1653	8.0	7.5~9.0	236	9.3	669	26.3	8.7	11.0/32	312	BS	E	M+S
225/45R18	95 T XL	16121	50	690	1521	7.5	7.0~8.5	225	8.9	659	25.9	8.7	11.0/32	308	BS	E	M+S
235/50R18	97 T	18539	51	730	1609	7.5	6.5~8.5	245	9.6	693	27.3	8.7	11.0/32	321	BS	E	M+S
17 inch																	
245/45R17	99 T XL	16123	50	775	1709	8.0	7.5~9.0	243	9.6	652	25.7	8.7	11.0/32	302	BS	E	M+S
235/45R17	97 T XL	16122	50	730	1609	8.0	7.5~9.0	236	9.3	644	25.4	8.7	11.0/32	299	BS	E	M+S
225/45R17	94 T XL	16120	50	670	1477	7.5	7.0~8.5	225	8.9	634	25.0	8.7	11.0/32	295	BS	E	M+S
225/50R17	98 T XL	16129	50	750	1653	7.0	6.0~8.0	233	9.2	658	25.9	8.7	11.0/32	305	BS	E	M+S
215/50R17	95 T XL	16128	50	690	1521	7.0	6.0~7.5	226	8.9	648	25.5	8.7	11.0/32	301	BS	E	M+S
205/50R17	93 T XL	16127	50	650	1433	6.5	5.5~7.5	214	8.4	638	25.1	8.7	11.0/32	297	BS	E	M+S
235/55R17	99 T	16137	51	775	1709	7.5	6.5~8.5	245	9.6	690	27.2	8.7	11.0/32	317	BS	E	M+S
225/55R17	101 T XL	16136	50	825	1819	7.0	6.0~8.0	233	9.2	680	26.8	8.7	11.0/32	313	BS	E	M+S
16 inch																	
225/55R16	99 T XL	16135	50	775	1709	7.0	6.0~8.0	233	9.2	654	25.7	8.7	11.0/32	300	BS	E	M+S
15 inch																	
185/55R15	86 T XL	16130	50	530	1168	6.0	5.0~6.5	194	7.6	585	23.0	8.7	11.0/32	270	BS	E	M+S
185/60R15	88 T XL	16139	50	560	1235	5.5	5.0~6.5	189	7.4	603	23.7	8.7	11.0/32	277	BS	E	M+S
14 inch																	
175/70R14	88 T XL	16150	50	560	1235	5.0	4.5~6.0	177	7.0	602	23.7	8.7	11.0/32	274	BS	E	M+S

* Our company is entitled to make any change on any information in this catalogue, without further notice.

* All figures are for reference; our company is not responsible for printing errors.

WINGUARD ice SUV

NORDIC / STUDLESS SUV



Dual V shape -
Enhanced grip & braking



3D block -
Prevents abnormal wear



4 grooves + 2 semi grooves -
Drainage of snow, slush and water



Shoulder stiffness -
Enhanced durability

BENEFITS



**EXCELLENT
SNOW PERFORMANCE**




**EXCELLENT
ICE PERFORMANCE**



**BETTER COMFORT &
LOW NOISE**

KEY PERFORMANCE INDICATORS

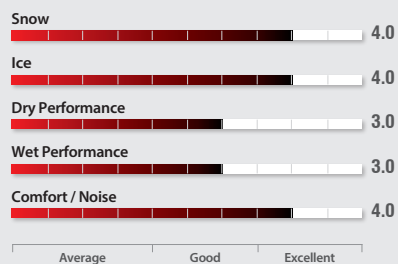

WINGUARD ice SUV

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.		SLR.	S/W	E	M+S
				kgs	lbs	Range		mm	inch	mm	inch	mm	/32"				
20 inch																	
285/50R20	116 T XL	16347	50	1250	2756	9.0	8.0~10.0	297	11.7	794	31.3	9.1	11.5/32	366	BS	E	M+S
265/50R20	111 T XL	16346	50	1090	2403	8.5	7.5~9.5	277	10.9	774	30.5	9.1	11.5/32	358	BS	E	M+S
18 inch																	
235/55R18	100 Q	13930	51	800	1764	7.5	6.5~8.5	245	9.6	715	28.2	9.1	11.5/32	330	BS	E	M+S
285/60R18	116 Q	13947	51	1250	2756	8.5	8.0~10.0	292	11.5	799	31.5	9.1	11.5/32	362	BS	E	M+S
265/60R18	110 Q	13945	51	1060	2337	8.0	7.5~9.5	272	10.7	775	30.5	9.1	11.5/32	353	BS	E	M+S
235/60R18	103 Q	13931	51	875	1929	7.0	6.5~8.5	240	9.4	739	29.1	9.1	11.5/32	339	BS	E	M+S
225/60R18	100 T	18538	51	800	1764	6.5	6.0~8.0	228	9.0	727	28.6	9.1	11.5/32	334	BS	E	M+S
17 inch																	
225/60R17	103 Q XL	13936	50	875	1929	6.5	6.0~8.0	228	9.0	702	27.6	9.1	11.5/32	322	BS	E	M+S
265/65R17	112 Q	13946	51	1120	2469	8.0	7.5~9.5	272	10.7	776	30.6	9.1	11.5/32	351	BS	E	M+S
235/65R17	108 Q XL	13305	50	1000	2205	7.0	6.5~8.5	240	9.4	738	29.1	9.1	11.5/32	336	BS	E	M+S
225/65R17	102 Q	13301	51	850	1874	6.5	6.0~8.0	228	9.0	724	28.5	9.1	11.5/32	330	BS	E	M+S
16 inch																	
215/65R16	98 Q	13303	51	750	1653	6.5	6.0~7.5	221	8.7	686	27.0	9.1	11.5/32	312	BS	E	M+S
265/70R16	112 Q	13302	51	1120	2469	8.0	7.0~9.0	272	10.7	778	30.6	9.1	11.5/32	348	BS	E	M+S
245/70R16	107 Q	13944	51	975	2149	7.0	6.5~8.0	248	9.8	750	29.5	9.1	11.5/32	337	BS	E	M+S
225/70R16	103 Q	13929	51	875	1929	6.5	6.0~7.5	228	9.0	722	28.4	9.1	11.5/32	326	BS	E	M+S
215/70R16	100 Q	13304	51	800	1764	6.5	5.5~7.0	221	8.7	708	27.9	9.1	11.5/32	321	BS	E	M+S
235/75R16	108 Q	18543	50	1000	2205	6.5	6.0~8.0	235	9.3	758	29.8	9.1	11.5/32	340	BS	E	M+S
225/75R16	104 T	18542	51	900	1984	6.0	6.0~7.5	223	8.8	744	29.3	9.1	11.5/32	335	BS	E	M+S

• Our company is entitled to make any change on any information in this catalogue, without further notice.
• All figures are for reference; our company is not responsible for printing errors.

WINGUARD ice

NORDIC / STUDLESS PCR

4 Wide longitudinal grooves -
Improved drainage performanceShoulder design - Enhanced
traction and driving controlSaw shaped multi sipe groove -
Enhanced snow & ice performanceCenter block design -
Enhanced straight driving
performance**BENEFITS**


PC / MID-SIZE



PC / COMPACT



PC / SMALL CAR

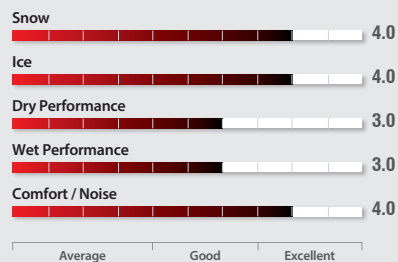**EXCELLENT
SNOW PERFORMANCE****EXCELLENT
ICE PERFORMANCE****BETTER COMFORT &
LOW NOISE****KEY PERFORMANCE INDICATORS****WINGUARD ice**

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.		SLR	S/W	E	M+S
				kgs	lbs	Range		mm	inch	mm	inch	mm	/32"				

17 inch

215/45R17	87 Q	11141	44	545	1201	7.0	7.0~8.0	213	8.4	626	24.6	8.7	11.0/32	292	BS	E	M+S
215/55R17	94 Q	13068	44	670	1477	7.0	6.0~7.5	226	8.9	668	26.3	8.7	11.0/32	309	BS	E	M+S
215/60R17	96 Q	13072	44	710	1565	6.5	6.0~7.5	221	8.7	690	27.2	8.7	11.0/32	317	BS	E	M+S

16 inch

215/55R16	93 Q	11805	44	650	1433	7.0	6.0~7.5	226	8.9	642	25.3	8.7	11.0/32	295	BS	E	M+S
205/55R16	91 Q	11802	44	615	1356	6.5	5.5~7.5	214	8.4	632	24.9	8.7	11.0/32	291	BS	E	M+S
195/55R16	87 Q	15056	44	545	1201	6.0	5.5~7.0	201	7.9	620	24.4	8.7	11.0/32	286	BS	E	M+S
215/60R16	95 Q	12015	44	690	1521	6.5	6.0~7.5	221	8.7	664	26.1	8.7	11.0/32	304	BS	E	M+S
205/60R16	92 Q	11799	44	630	1389	6.0	5.5~7.5	209	8.2	652	25.7	8.7	11.0/32	299	BS	E	M+S
215/65R16	98 Q	13079	44	750	1653	6.5	6.0~7.5	221	8.7	686	27.0	8.7	11.0/32	312	BS	E	M+S
205/65R16	95 Q	13077	44	690	1521	6.0	5.5~7.5	209	8.2	672	26.5	8.7	11.0/32	307	BS	E	M+S

15 inch

195/50R15	82 Q	11804	44	475	1047	6.0	5.5~7.0	201	7.9	577	22.7	9.1	11.5/32	267	BS	E	M+S
195/55R15	85 Q	11803	44	515	1135	6.0	5.5~7.0	201	7.9	595	23.4	8.7	11.0/32	274	BS	E	M+S
195/60R15	88 Q	11956	44	560	1235	6.0	5.5~7.0	201	7.9	615	24.2	8.7	11.0/32	282	BS	E	M+S
215/65R15	96 Q	13078	44	710	1565	6.5	6.0~7.5	221	8.7	661	26.0	8.7	11.0/32	300	BS	E	M+S
205/65R15	94 Q	12016	44	670	1477	6.0	5.5~7.5	209	8.2	647	25.5	8.7	11.0/32	294	BS	E	M+S
195/65R15	91 Q	12011	44	615	1356	6.0	5.5~7.0	201	7.9	635	25.0	8.7	11.0/32	289	BS	E	M+S
185/65R15	88 Q	12012	44	560	1235	5.5	5.0~6.5	189	7.4	621	24.4	8.7	11.0/32	284	BS	E	M+S
175/65R15	84 Q	13085	44	500	1102	5.0	5.0~6.0	177	7.0	609	24.0	8.7	11.0/32	279	BS	E	M+S
205/70R15	96 Q	13082	44	710	1565	6.0	5.0~7.0	209	8.2	669	26.3	8.7	11.0/32	303	BS	E	M+S

14 inch

185/60R14	82 Q	11798	44	475	1047	5.5	5.0~6.5	189	7.4	578	22.8	8.7	11.0/32	264	BS	E	M+S
165/60R14	79 Q XL	13597	50	437	963	5.0	4.5~6.0	170	6.7	554	21.8	8.7	11.0/32	255	BS	E	M+S
185/65R14	86 Q	12013	44	530	1168	5.5	5.0~6.5	189	7.4	596	23.5	8.7	11.0/32	271	BS	E	M+S
175/65R14	82 Q	12014	44	475	1047	5.0	5.0~6.0	177	7.0	584	23.0	8.7	11.0/32	267	BS	E	M+S
195/70R14	91 Q	13081	44	615	1356	6.0	5.0~6.5	201	7.9	630	24.8	8.7	11.0/32	285	BS	E	M+S
185/70R14	88 Q	11807	44	560	1235	5.5	4.5~6.0	189	7.4	616	24.3	8.7	11.0/32	279	BS	E	M+S


13 inch

155/65R13	73 Q	13074	44	365	805	4.5	4.5~5.5	157	6.2	532	20.9	8.7	11.0/32	244	BS	E	M+S
175/70R13	82 Q	11806	44	475	1047	5.0	4.5~6.0	177	7.0	576	22.7	8.7	11.0/32	261	BS	E	M+S


• Our company is entitled to make any change on any information in this catalogue, without further notice.
 • All figures are for reference; our company is not responsible for printing errors.

WINGUARD SUV


ALPINE / STUDLESS SUV




V shaped directional pattern design - Exceptional traction performance



Multi kerf design - Improved grip power



Directional tread design - Enhanced winter performance



5 random pitch variation - Reduced pattern noise


BENEFITS



EXCELLENT SNOW PERFORMANCE

EXCELLENT HANDLING PERFORMANCE

LONG LASTING TREAD LIFE

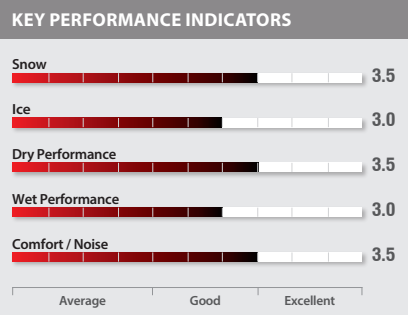

WINGUARD SUV

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.		SLR.	S/W	E	M+S
				kgs	lbs		Range	mm	inch	mm	inch	mm	/32"				
19 inch																	
255/50R19	107 V XL	14135	50	975	2149	8.0	7.0~9.0	265	10.4	739	29.1	10.3	13.0/32	342	BS	E	M+S
18 inch																	
235/50R18	101 V XL	14132	50	825	1819	7.5	6.5~8.5	245	9.6	693	27.3	10.3	13.0/32	321	BS	E	M+S
255/55R18	109 V XL	16058	50	1030	2271	8.0	7.0~9.0	265	10.4	737	29.0	10.3	13.0/32	338	BS	E	M+S
225/55R18	102 V XL	14130	50	850	1874	7.0	6.0~8.0	233	9.2	705	27.8	10.3	13.0/32	326	BS	E	M+S
225/60R18	104 V XL	14131	50	900	1984	6.5	6.0~8.0	228	9.0	727	28.6	10.3	13.0/32	334	BS	E	M+S
16 inch																	
225/60R17	103 H XL	13088	50	875	1929	6.5	6.0~8.0	228	9.0	702	27.6	10.3	13.0/32	322	BS	E	M+S
265/65R17	112 H	14136	44	1120	2469	8.0	7.5~9.5	272	10.7	776	30.6	10.3	13.0/32	351	BS	E	M+S
235/65R17	108 H XL	16053	50	1000	2205	7.0	6.5~8.5	240	9.4	738	29.1	10.3	13.0/32	336	BS	E	M+S
225/65R17	102 H	11218	44	850	1874	6.5	6.0~8.0	228	9.0	724	28.5	10.3	13.0/32	330	BS	E	M+S
16 inch																	
215/65R16	98 H	16078	44	750	1653	6.5	6.0~7.5	221	8.7	686	27.0	10.3	13.0/32	312	BS	E	M+S
265/70R16	112 T	16057	44	1120	2469	8.0	7.0~9.0	272	10.7	778	30.6	10.3	13.0/32	348	BS	E	M+S
235/70R16	106 T	16054	44	950	2094	7.0	6.0~8.0	240	9.4	736	29.0	10.3	13.0/32	332	BS	E	M+S
15 inch																	
205/70R15	96 T	16031	44	710	1565	6.0	5.0~7.0	209	8.2	669	26.3	10.3	13.0/32	303	BS	E	M+S
235/75R15	109 T XL	16047	50	1030	2271	6.5	6.0~8.0	235	9.3	733	28.9	10.3	13.0/32	328	BS	E	M+S

• Our company is entitled to make any change on any information in this catalogue, without further notice.
• All figures are for reference; our company is not responsible for printing errors.

WINGUARD winSpike

NORDIC / STUD PCR

V shaped groove -
Reinforced rain&snow drainage12 multi random stud line -
Maximized snow & ice tractionZigzag center - Enhanced straight
driving performanceMulti sipe - Reinforced snow & ice
performance

BENEFITS




PC / MID-SIZE



PC / COMPACT

**EXCELLENT SNOW & ICE
PERFORMANCE****EXCELLENT
DRY PERFORMANCE****EXCELLENT
WET PERFORMANCE**

KEY PERFORMANCE INDICATORS

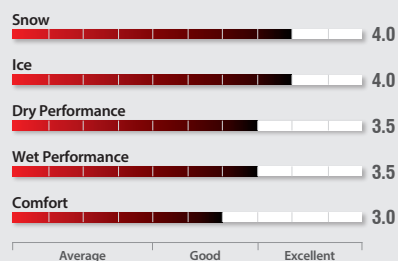

WINGUARD winSpike

Size	LI & SR	Code	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.		SLR.	S/W	E	M+S
				kgs	lbs			mm	inch	mm	inch	mm	/32"				
17 inch																	
225/45R17	91 T	14055	44	615	1356	7.5	7.0~8.5	225	8.9	634	25.0	9.5	12.0/32	295	BS	E	M+S
225/50R17	98 T XL	12269	50	750	1653	7.0	6.0~8.0	233	9.2	658	25.9	9.5	12.0/32	305	BS	E	M+S
215/50R17	95 T XL	13006	50	690	1521	7.0	6.0~7.5	226	8.9	648	25.5	9.5	12.0/32	301	BS	E	M+S
235/55R17	103 T XL	13009	50	875	1929	7.5	6.5~8.5	245	9.6	690	27.2	9.5	12.0/32	317	BS	E	M+S
225/55R17	101 T XL	13008	50	825	1819	7.0	6.0~8.0	233	9.2	680	26.8	9.5	12.0/32	313	BS	E	M+S
215/55R17	98 T XL	11834	50	750	1653	7.0	6.0~7.5	226	8.9	668	26.3	9.5	12.0/32	309	BS	E	M+S
215/60R17	100 T XL	12272	50	800	1764	6.5	6.0~7.5	221	8.7	690	27.2	9.5	12.0/32	317	BS	E	M+S

16 inch

215/55R16	97 T XL	11824	50	730	1609	7.0	6.0~7.5	226	8.9	642	25.3	9.5	12.0/32	295	BS	E	M+S
205/55R16	94 T XL	11821	50	670	1477	6.5	5.5~7.5	214	8.4	632	24.9	9.5	12.0/32	291	BS	E	M+S
195/55R16	87 T	15062	44	545	1201	6.0	5.5~7.0	201	7.9	620	24.4	9.5	12.0/32	286	BS	E	M+S
225/60R16	102 T XL	11832	50	850	1874	6.5	6.0~8.0	228	9.0	676	26.6	9.5	12.0/32	308	BS	E	M+S
215/60R16	99 T XL	11815	50	775	1709	6.5	6.0~7.5	221	8.7	664	26.1	9.5	12.0/32	304	BS	E	M+S
205/60R16	92 T	11818	44	630	1389	6.0	5.5~7.5	209	8.2	652	25.7	9.5	12.0/32	299	BS	E	M+S
195/60R16	89 T	12102	44	580	1279	6.0	5.5~7.0	201	7.9	640	25.2	9.5	12.0/32	294	BS	E	M+S
215/65R16	102 T XL	11833	50	850	1874	6.5	6.0~7.5	221	8.7	686	27.0	9.5	12.0/32	312	BS	E	M+S

15 inch

195/50R15	82 T	11823	44	475	1047	6.0	5.5~7.0	201	7.9	577	22.7	9.5	12.0/32	267	BS	E	M+S
195/55R15	89 T XL	11822	50	580	1279	6.0	5.5~7.0	201	7.9	595	23.4	9.5	12.0/32	274	BS	E	M+S
185/55R15	86 T XL	12270	50	530	1168	6.0	5.0~6.5	194	7.6	585	23.0	9.5	12.0/32	270	BS	E	M+S
195/60R15	92 T XL	11819	50	630	1389	6.0	5.5~7.0	201	7.9	615	24.2	9.5	12.0/32	282	BS	E	M+S
185/60R15	88 T XL	12271	50	560	1235	5.5	5.0~6.5	189	7.4	603	23.7	9.5	12.0/32	277	BS	E	M+S
205/65R15	99 T XL	11816	50	775	1709	6.0	5.5~7.5	209	8.2	647	25.5	9.5	12.0/32	294	BS	E	M+S
195/65R15	95 T XL	11811	50	690	1521	6.0	5.5~7.0	201	7.9	635	25.0	9.5	12.0/32	289	BS	E	M+S
185/65R15	92 T XL	11812	50	630	1389	5.5	5.0~6.5	189	7.4	621	24.4	9.5	12.0/32	284	BS	E	M+S
215/70R15	98 T	13007	44	750	1653	6.5	5.5~7.0	221	8.7	683	26.9	9.5	12.0/32	308	BS	E	M+S
205/70R15	96 T	12273	44	710	1565	6.0	5.0~7.0	209	8.2	669	26.3	9.5	12.0/32	303	BS	E	M+S

14 inch

185/60R14	82 T	11817	44	475	1047	5.5	5.0~6.5	189	7.4	578	22.8	9.5	12.0/32	264	BS	E	M+S
185/65R14	90 T XL	11813	50	600	1323	5.5	5.0~6.5	189	7.4	596	23.5	9.5	12.0/32	271	BS	E	M+S
175/65R14	86 T XL	11814	50	530	1168	5.0	5.0~6.0	177	7.0	584	23.0	9.5	12.0/32	267	BS	E	M+S
195/70R14	91 T	13005	44	615	1356	6.0	5.0~6.5	201	7.9	630	24.8	9.5	12.0/32	285	BS	E	M+S
185/70R14	92 T XL	11830	50	630	1389	5.5	4.5~6.0	189	7.4	616	24.3	9.5	12.0/32	279	BS	E	M+S

14 inch

175/70R14	84 T	11831	44	500	1102	5.0	4.5~6.0	177	7.0	602	23.7	9.5	12.0/32	274	BS	E	M+S
-----------	------	-------	----	-----	------	-----	---------	-----	-----	-----	------	-----	---------	-----	----	---	-----


13 inch

175/70R13	82 T	11828	44	475	1047	5.0	4.5~6.0	177	7.0	576	22.7	9.5	12.0/32	261	BS	E	M+S
-----------	------	-------	----	-----	------	-----	---------	-----	-----	-----	------	-----	---------	-----	----	---	-----

• Our company is entitled to make any change on any information in this catalogue, without further notice.
• All figures are for reference; our company is not responsible for printing errors.

WINGUARD winSpike SUV

NORDIC / STUD SUV / LTR

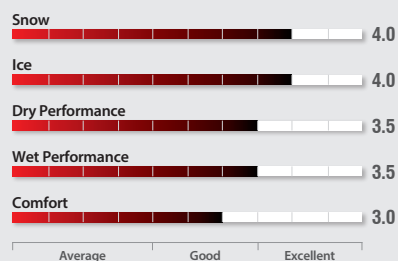V shaped groove -
Reinforced rain&snow drainageZigzag center & shoulder -
Enhanced straight driving
performance12 multi random stud line -
Maximized snow & ice tractionStep style multi sipe -
Reinforced snow & ice performance**BENEFITS****EXCELLENT SNOW & ICE
PERFORMANCE****EXCELLENT
DRY PERFORMANCE****EXCELLENT
WET PERFORMANCE****KEY PERFORMANCE INDICATORS**

Size	LI & SR	Code	P R	Max. Psi	Max. Load		Rim Width		S.W.		O.D.		T.D.	SLR	S/W	E	M+S		
					kgs	lbs	mm	Range	mm	inch	mm	inch	mm					/32"	mm
					S	D													

18 inch

255/55R18	109 T XL	12754	4	50	1030	2271	8.0	7.0~9.0	265	10.4	737	29.0	10.0	12.6/32	338	BS	E M+S
235/55R18	100 T	12751	4	44	800	1764	7.5	6.5~8.5	245	9.6	715	28.2	10.0	12.6/32	330	BS	E M+S
225/55R18	98 T	12745	4	44	750	1653	7.0	6.0~8.0	233	9.2	705	27.8	10.0	12.6/32	326	BS	E M+S
265/60R18	114 T XL	12529	4	50	1180	2601	8.0	7.5~9.5	272	10.7	775	30.5	10.0	12.6/32	353	BS	E M+S
255/60R18	112 T XL	12766	4	50	1120	2469	7.5	7.0~9.0	260	10.2	763	30.0	10.0	12.6/32	348	BS	E M+S
245/60R18	105 T	14051	4	44	925	2039	7.0	7.0~8.5	248	9.8	751	29.6	10.0	12.6/32	344	BS	E M+S
235/60R18	107 T XL	12531	4	50	975	2149	7.0	6.5~8.5	240	9.4	739	29.1	10.0	12.6/32	339	BS	E M+S
225/60R18	100 T	12761	4	44	800	1764	6.5	6.0~8.0	228	9.0	727	28.6	10.0	12.6/32	334	BS	E M+S

17 inch

225/60R17	99 T	12755	4	44	775	1709	6.5	6.0~8.0	228	9.0	702	27.6	10.0	12.6/32	322	BS	E M+S
265/65R17	116 T XL	12530	4	50	1250	2756	8.0	7.5~9.5	272	10.7	776	30.6	10.0	12.6/32	351	BS	E M+S
245/65R17	107 T	12773	4	44	975	2149	7.0	7.0~8.5	248	9.8	750	29.5	10.0	12.6/32	341	BS	E M+S
235/65R17	108 T XL	12527	4	50	1000	2205	7.0	6.5~8.5	240	9.4	738	29.1	10.0	12.6/32	336	BS	E M+S
225/65R17	106 T XL	12528	4	50	950	2094	6.5	6.0~8.0	228	9.0	724	28.5	10.0	12.6/32	330	BS	E M+S
LT245/75R17	121/118 Q	14045	10	80	1450 1320	3195 2910	7.0	6.5~7.5	248	9.8	800	31.5	12.7	16.0/32	360	BS	E M+S

16 inch

235/60R16	100 T	12762	4	44	800	1764	7.0	6.5~8.5	240	9.4	688	27.1	10.0	12.6/32	313	BS	E M+S
235/65R16C	121/119 R	16386	10	83	1450 1360	3197 2998	7.0	6.5~7.5	240	9.4	712	28.0	10.0	12.6/32	322	BS	E M+S
225/65R16C	112/110 R	15060	8	69	1120 1060	2469 2337	6.5	6.0~7.0	228	9.0	698	27.5	10.0	12.6/32	317	BS	E M+S
215/65R16C	109/107 R	14038	8	69	1030 975	2271 2149	6.5	6.0~7.0	221	8.7	686	27.0	10.0	12.6/32	312	BS	E M+S
205/65R16C	107/105 R	14037	8	69	975 925	2149 2039	6.0	5.5~6.5	209	8.2	672	26.5	10.0	12.6/32	307	BS	E M+S
265/70R16	112 T	12791	4	44	1120	2469	8.0	7.0~9.0	272	10.7	778	30.6	10.0	12.6/32	348	BS	E M+S
245/70R16	107 T	12789	4	44	975	2149	7.0	6.5~8.0	248	9.8	750	29.5	10.0	12.6/32	337	BS	E M+S
235/70R16	106 T	12788	4	44	950	2094	7.0	6.0~8.0	240	9.4	736	29.0	10.0	12.6/32	332	BS	E M+S
225/70R16	107 T XL	12787	4	50	975	2149	6.5	6.0~7.5	228	9.0	722	28.4	10.0	12.6/32	326	BS	E M+S
215/70R16	100 T	12786	4	44	800	1764	6.5	5.5~7.0	221	8.7	708	27.9	10.0	12.6/32	321	BS	E M+S
LT265/75R16	123/120 Q	12807	10	80	1550 1400	3415 3085	7.5	7.0~8.0	267	10.5	804	31.7	12.7	16.0/32	358	BS	E M+S
245/75R16	111 T	12794	4	44	1090	2403	7.0	6.5~8.0	248	9.8	774	30.5	10.0	12.6/32	346	BS	E M+S
LT225/75R16	115/112 Q	12804	10	80	1215 1120	2680 2470	6.0	6.0~7.0	223	8.8	744	29.3	12.7	16.0/32	335	BS	E M+S
195/75R16C	107/105 R	14043	8	69	975 925	2149 2039	5.5	5.0~6.0	196	7.7	698	27.5	10.0	12.6/32	317	BS	E M+S

15 inch

31x10.5R15LT	109 Q	14048	6	50	1030	2270	8.5	7.0~9.0	268	10.6	775	30.5	12.7	16.0/32	344	BS	E M+S
225/70R15C	112/110 R	14041	8	65	1120 1060	2469 2337	6.5	6.0~7.0	228	9.0	697	27.4	10.0	12.6/32	314	BS	E M+S
195/70R15C	104/102 R	14040	8	65	900 850	1984 1874	6.0	5.0~6.0	201	7.9	655	25.8	10.0	12.6/32	297	BS	E M+S
235/75R15	105 T	14053	4	44	925	2039	6.5	6.0~8.0	235	9.3	733	28.9	10.0	12.6/32	328	BS	E M+S

• Our company is entitled to make any change on any information in this catalogue, without further notice.
• All figures are for reference; our company is not responsible for printing errors.

TECHNICAL DATA



IMPORTANT SAFETY WARNING AND MAINTENANCE INFORMATION

Any tire, no matter how well constructed, may fail in use as a result of punctures, impact damage, improper inflation or other conditions resulting from use.

Tire failures may create risk of property damage or personal injury. To reduce the risk of tire failure, we strongly recommend the following:

WARNING :

Serious Injury May Result From:

- Tire failure due to underinflation/vehicle overloading - follow owner's manual specifications or tire information placard in your vehicle.
- Explosion of tire/rim assembly due to improper mounting - only specially trained persons should mount tires.

Check Inflation Pressure On All Tires

Tire pressures, including the spare, should be checked at least once per month before driving, when the tires are cold (after the vehicle has been stopped for three hours or driven less than one mile). Do not reduce air pressure when tires are hot. Use a tire gauge to check pressure and maintain it at the level recommended by the vehicle manufacturer. If a tire loses more than one pound of air pressure per month, have it checked for leakage by your dealer. Proper inflation pressure is very important to tire life, comfortableness, and vehicle handling, therefore you should always maintain the correct inflation pressure in your tires according to your vehicle manufacturer's recommendation. In addition, your vehicle has a Tire Information Placard, which indicates the proper tire size and inflation pressure for your particular model car.

Wheel Alignment and Balancing

These are very important considerations for comfortableness and maximum mileage from your tires. Check how your tires are wearing at least once a month. If your tires are wearing unevenly, such as the inside shoulder of the tire wearing faster than the rest of the tread, your vehicle may be out of alignment. This condition not only shortens the life of your tires but also adversely affects the handling characteristics of your vehicle which could be dangerous. If irregular wear is indicated, have your alignment checked immediately. Tires which have been run underinflated will show more wear on the shoulders than in the center of the tread. Such underinflation may cause damage to the tire structure. Have the tires inspected by your dealer.

Do Not Overload

The maximum load capacity and air pressure of your tires is marked on the sidewall. Do not exceed these limits. Following the loading instructions of the manufacturer of your vehicle should insure that your tires are not overloaded.

Tires which are loaded beyond their maximum allowable loads for the particular application will build up excessive heat that may result in sudden tire destruction.


Radial Tire Rotation

The purpose for rotating tires is to achieve a more uniform wear for all tires on a vehicle. Before rotating tires, determine the cause of any unusual wear and correct any misalignment, imbalance, or other mechanical problems.



These rotation patterns are acceptable. Please refer to your vehicle owner's manual regarding tire rotation advice.

Your warranty requires the tire to be rotated at least every 6,000miles (9,500km).

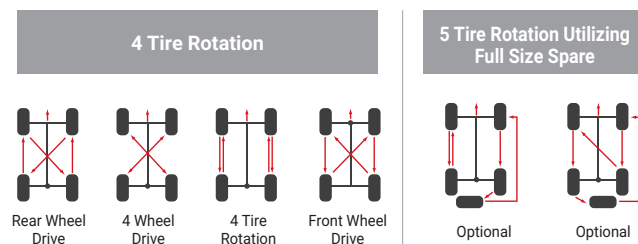

TIRE SIZE DESIGNATION



245 / 45 R 17 98 W

Section Width (mm)
Aspect Ratio(Series)
Radial Construction
Rim Diameter(inch)
Load Index
Speed Symbols

LOAD INDEX TABLE

LI	kg	LI	kg	LI	kg	LI	kg	LI	kg
50	190	76	400	102	850	128	1800	154	3750
51	195	77	412	103	875	129	1850	155	3875
52	200	78	425	104	900	130	1900	156	4000
53	206	79	437	105	925	131	1950	157	4125
54	212	80	450	106	950	132	2000	158	4250
55	218	81	462	107	975	133	2060	159	4375
56	224	82	475	108	1000	134	2120	160	4500
57	230	83	487	109	1030	135	2180	161	4625
58	236	84	500	110	1060	136	2240	162	4750
59	243	85	515	111	1090	137	2300	163	4875
60	250	86	530	112	1120	138	2360	164	5000
61	257	87	545	113	1150	139	2430	165	5150
62	265	88	560	114	1180	140	2500	166	5300
63	272	89	580	115	1215	141	2575	167	5450
64	280	90	600	116	1250	142	2650	168	5600
65	290	91	615	117	1285	143	2725	169	5800
66	300	92	630	118	1320	144	2800	170	6000
67	307	93	650	119	1360	145	2900	171	6150
68	315	94	670	120	1400	146	3000	172	6300
69	325	95	690	121	1450	147	3075	173	6500
70	335	96	710	122	1500	148	3150	174	6700
71	345	97	730	123	1550	149	3250	175	6900
72	355	98	750	124	1600	150	3350	176	7100
73	365	99	775	125	1650	151	3450	177	7300
74	375	100	800	126	1700	152	3550	178	7500
75	387	101	825	127	1750	153	3650	179	7750

SPEED SYMBOLS

Important information is molded on the tire sidewall. Among other information, the sidewall data contains the type size, load range, maximum load and maximum pressure for that particular tire.

Speed Ratings	P	Q	R	S	T	U	H	V	W	Y
Max Speed(Km/hr)	150	160	170	180	190	200	210	240	270	300
Max Speed(mph)	93	99	105	112	118	124	130	149	168	186

TECHNICAL DATA

CONVERSION CHART

Note - The recommendations shown in the chart below do not always guarantee complete interchangeability, primarily because of the differences in section widths. Therefore, before replacing tires with different sizes, always consult your technical representative or tire dealer about proper clearance between tire and fender for your particular automobile.

70 Series	65 Series	60 Series	55 Series	50 Series	45 Series	40 Series	35 Series	30 Series
145/70R13	155/65R13			175/50R15				
155/70R13	165/65R13	165/60R14						
165/70R13	175/65R13	175/60R14						
	175/65R13	185/60R13	185/55R14		195/45R15			
175/70R13	185/65R13	185/60R14		195/50R15		205/40R16		
185/70R13		195/60R14		205/50R15		215/40R16		
		205/60R14						
165/70R14	175/65R14	215/60R14	185/55R15	225/50R15				
		185/60R14		195/50R15		205/40R16		
175/70R14		185/60R15		195/50R16		205/40R17		
	185/65R14	195/60R14	195/55R15	205/50R15	205/45R16			
185/70R14		195/60R15		205/50R16		215/40R17		
195/70R14	195/65R14	205/60R14	205/55R15					
	205/65R14	215/60R14		225/50R15				
					225/45R16			
205/70R14	215/65R14	215/60R15		225/50R16		235/40R17		
215/70R14		225/60R15				245/40R17		
		235/60R14						
				245/50R16		255/40R17		
		185/60R15		195/50R16		205/40R17		
		195/55R15		205/45R16				
	185/65R15	195/55R16		205/50R15	215/40R16			
		195/60R15		205/50R16	215/40R17			
		205/55R15						
	195/65R15	205/55R16		215/45R17				
		195/60R16		205/50R17	215/40R18			
195/70R15		205/60R15				225/40R18		
	205/65R15	215/60R15	215/55R16	225/50R16	225/45R17			
205/70R15		215/60R16		225/50R17	235/40R17	235/40R18		
	215/65R15		225/55R16		235/45R17	245/40R17		
215/70R15		225/60R15						255/30R19
		225/60R16			245/45R17	255/35R18		
255/70R15					245/50R16			
265/70R15	195/65R16	205/60R16		215/50R17		225/40R18		
			215/55R16	225/45R17				
				225/50R16	235/40R17			
				215/45R18		225/35R19		
							225/30R20	
	205/65R16		215/55R17	225/45R18		235/35R19		
		215/60R16		225/50R17	235/40R18			
		225/55R16		235/45R17	245/40R17			
						225/35R20	235/30R20	

70 Series	65 Series	60 Series	55 Series	50 Series	45 Series	40 Series	35 Series	30 Series
	215/65R16		225/55R17		235/45R18		245/35R19	
		225/60R16		235/50R17		245/40R18		255/30R19
		215/60R17		225/50R18				
				245/50R16		255/40R17		
215/70R16		225/60R17		235/50R18		245/40R19	255/35R18	
	225/65R16		235/55R17		245/45R18		255/35R19	
		235/60R16						
					255/45R17		265/35R18	
						255/40R18		265/30R19
225/70R16		235/60R17		245/50R18		255/40R19		275/30R19
	235/65R16							
					255/45R18		275/35R18	
						275/40R17		
255/70R16		265/60R17						
265/70R16		275/60R17						
		265/60R18						
	215/65R17		225/55R18		235/45R19		245/35R20	
		225/60R17		235/50R18		245/40R19		
			235/55R17		245/45R18		255/35R19	
					255/45R17		265/35R18	
						255/40R18		265/30R19
	225/65R17		235/55R18		245/45R19		255/35R20	
		235/60R17		245/50R18		255/40R19		275/30R19
					255/45R18			
		225/60R18						
						275/40R17		
							275/35R18	
						245/40R20		
	235/65R17							
		235/60R18						275/30R20
			255/55R18					
	245/65R17							
		255/60R17						
		245/60R18		255/50R19				
						275/40R19		285/30R20
245/70R17		255/60R18					275/35R20	
	255/65R17	265/60R17						
						275/40R20		
	235/65R18							
265/70R17		275/60R18						
	265/65R18							
						295/40R20		
	275/65R18		275/55R20					
		285/60R18		285/50R20	295/45R20			
				255/50R19				
						275/40R19		285/30R20
							275/35R20	
					285/45R19			
				255/50R20	265/45R20	275/40R20		
				265/50R20	275/45R20			
				285/50R20	295/45R20			
								235/30R22
								245/30R22
					285/45R22			255/30R22
							265/35R22	
							285/35R22	295/30R22
				285/50R22		305/40R22		
					305/45R22			
								255/30R24
							295/35R24	
							305/35R24	

GLOBAL NETWORK



■ Overseas Corporation □ Plant ○ Technical Center ● Branch office

EUROPE

NEXEN TIRE EUROPE s.r.o. / Europe Plant

Bitoveves-Průmyslová zóna Triangle, Průmyslová 1000, 438 01 Bitoveves
T 420-703-496-033 E-mail prace@nexentire.com

NEXEN TIRE EUROPE Technical Center

Lise Meitner Strasse 1 65779 Kelkheim, Germany
T 49-6195-9713-0 E-mail marketing.ntc@nexentire.com

Frankfurt Branch office

Reifenhandel-Niederlassung Deutschland,
Lise Meitner Strasse 1 65779 Kelkheim,
Germany
T 49-6195-9713-0
E-mail marketing.ntc@nexentire.com

Milano Branch office

Centro Milanofiori Strada 6, Palazzo N1
20089 Rozzano, Italy
T 39-02-89292-71
E-mail nexentireitalia@nexentire.com

Lyon Branch office

210 Avenue Jean Jaurès, 69007 Lyon, France
T 33-4-8109-1113
E-mail nexenlyon@nx-france.fr

Praha Branch office

Bucharova 1314/8, 158 00 Praha 13,
Czech Republic
T 420-242-493-216
E-mail sangjunkim@nexentire.com

NEXEN TIRE Rus LLC

Office 1603, Entrance 3, World Trade
Center 12 Krasnopresnenskaya nab.,
123610, Moscow, Russia
T 7-495-120-4684
E-mail gom@nexentire.com

MIDDLE EAST & AFRICA

Dubai Branch office

2804 Aspect Tower D Business Bay Dubai PO Box
22803 UAE
T 971-4-294-6031 F 971-4-294-6032
E-mail simeon9409@nexentire.com

Johannesburg Branch office

6th floor Fredman Towers, 13 Fredman Drive,
Sandton, Johannesburg, South Africa 2196
T 27-11-783-4461 F 27-11-783-3504
E-mail sebastian@nexentire.com

Istanbul Branch office

Maslak mah.Söğütözü sok.No:20/U Ağaöğlu 1453
Sitesi T4b Blok Kat:11 Bölüm:63 Maslak-Sarıyer /
Istanbul
T 90-212-910-0280 F 90-212-910-0281
E-mail alex@nexentire.com

OCEANIA

Sydney Branch office

Suite 25, 33 Waterloo Road, Macquarie Park NSW
2113, Australia
T 61-403-319-700 F 61-2-9887-1035
E-mail nxpauljin717@nexentire.com

ASIA

THE NEXEN univerCITY [Central R&D Institute]

Nexentire, 177, Magokjungang-ro, Gangseo-gu, Seoul, Korea
T 82-55-370-5114 E-mail nexentire@nexentire.com

Yangsan Plant / Headquarters

355, Chungnyeol-ro, Yangsan-si, Gyeongsangnam-do, Korea
T 82-55-370-5114 F 82-55-370-5060 E-mail nexentire@nexentire.com

Changnyeong Plant

291, Daedongwolpo-ro, Daehap-myeon, Changnyeong-gun, Gyeongsangnam-do, Korea
T 82-55-911-3500 F 82-55-901-0200

Qingdao NEXEN TIRE Corporation & China Qingdao Plant

Jiangshanzhen, Laixishi, Qingdao, China 266-603
T 86-532-8247-1190 F 86-532-8247-1298 E-mail 20110619@nexentire.com

Shanghai NEXEN TIRE Sales Co., Ltd

Room 603, Four Seasons Plaza, No.538 Jinhui Road, Minhang District, Shanghai,
China 201103 T 86-21-6090-6090 F 86-21-6090-6099

NEXEN TIRE China Technical Center

Jiangshanzhen, Laixishi, Qingdao, China 266-603
T 86-532-8247-1101 F 86-532-8247-1298

NEXEN TIRE Japan Inc.

6F DaiTakatori Bldg, 2-3-31 Shibaura, Minato ku, Tokyo, Japan 108-0023
T 81-3-6435-4933 F 81-3-6435-4932 E-mail allen@nexentire.com

Kuala Lumpur Branch office

Unit 23A-5, Menara 1MK, No. 1, Jln. Kiara, Mont Kiara, 50480 Kuala Lumpur, Malaysia
T 60-3-6149-0620 E-mail cizin@nexentire.com

Delhi Branch office

#352, 3rd Floor, Centrum Plaza Bldg, Golf Course Road, Sector 53, Gurgaon-122002,
Haryana, India
T 91-99-7148-5098 E-mail jkchoi@nexentire.com

NORTH AMERICA

NEXEN TIRE America Inc. [Technical Center]

4014 Wheatley Road, Richfield, OH 44286, U.S.A.
T 1-330-659-4810 F 1-330-659-4840

NEXEN TIRE Canada Inc.

140 Allstate Parkway, Suite 500, Markham Ontario
L3R 5Y8 CANADA
T 1-905-604-4060 F 1-905-604-4070
E-mail info@nexentirecanada.com

SOUTH AMERICA

Sao Paulo Branch office

Avenida Doutor Churci Zaidan, 1550, Capital Corporate
Offices CJ 1606 Vila Cordeiro, São Paulo,
SP, Brasil CEP 04583-110
T 55-11-2639-9284 F 55-11-2639-9286
E-mail marcos@nexentire.com

Bogota Branch office

Avenida Carrera 45 No 108-27 Paralelo 108, Torre 2,
Oficina 702, Bogota, Colombia 111111
T 57-1-657-1912 E-mail jacob.lee@nexentire.com



THE NEXEN univerCITY [Central R&D Institute]

NEXEN TIRE, 177, Magokjungang-ro, Gangseo-gu, Seoul, Korea

www.roadstonetires.com

