



Wanli Tire Corporation Limited
Headquarters : NO.3 Wanli Road , Aotou Town , Conghua District , Guangzhou , P.R.China
Marketing Center :Guangzhou Intelligent Manufacturing Park, No.620, Shibei Industrial Road, Dashi Street,
Panyu District, Guangzhou, Guangdong, P.R.China.
Website: www.wanli-global.com Sales@wanlitire.cn
REV2024.04



SUNNY PASSENGER CAR & LIGHT TRUCK TIRE CATALOG

HP/UHP/HT/AT/RT/MT/LT/RFT/WINTER/ALL SEASON

WANLI TIRE CORPORATION LIMITED

COMPANY PROFILE

ABOUT US

Wanli Tire Co., Ltd. is controlled directly by Guangzhou Industrial Investment Holding Group Co., Ltd. It has three production bases, Conghua, Hefei and Diamond.

30.4 million
production capacity

24 million
PCR tires

2.4 million
TBR tires

4 million
two-wheeled tires

6 billion
output value

BRAND

"WANLI","SUNNY","APTANY" and "MILEVER " are four tire brands Wanli Tire Corporation Limited sells in overseas market ,Wanli Tire Corporation constantly develop and enrich the product line with the change of market, which has covered nine series of passenger tire products of Economic, Comfort, Racing tire, UHP, SUV on/off-road, LT, Run Flat tire, Winter tire, and All Season tire with more than 6,000 sizes which can meet all requirements from different markets. Our major products incorporate patterns like Comfort series SP026, UHP series SA302 SUV series SU025, etc.



R&D STRENGTH

WANLI has a national-level enterprise technology center, a nationally recognized laboratory, a contracted laboratory of the China Rubber Association, a post-doctoral research station, a Guangdong academician expert enterprise workstation, and a Guangdong engineering technology research and development center. With a full range of simulation analysis capabilities and the trial production and testing capabilities of rubber tire, it has a series of international advanced R&D facilities, and has established advanced laboratories including tire rolling resistance, rigidity, six-component force, high-speed uniformity, noise and vibration, modal analysis, etc., making its R&D capabilities at the leading level in China.

PRODUCT STRENGTH


WANLI is committed to providing consumers with high-quality tires, and officially passed the TÜV Rheinland test, becoming the first tire enterprise in China to pass the TÜV Rheinland test. In 2016, Wanli Tire Comfort Series H220 was included in the first and second batches of "Automotive Green Tire Grade Certification" issued by China Automotive Technology and Research Center, which shows that WANLI's product quality and technical strength are in the leading position in China.

MARKET RECOGNITION

Wanli Tire earns a good reputation in domestic and overseas markets, and its products sell well in more than 150 countries and regions around the world. In terms of OE market, WANLI supply more than 80 models of more than 20 OEMs, including Dongfeng Citroen / Peugeot, Zhengzhou Nissan, Beijing Hyundai, GAC Trumpchi, GAC Honda, JAC, GAC Hino, Nanjing Jinlong, Zhuzhou CRRC and Bombardier.

FUTURE

In the future, WANLI will continue to make efforts in R&D, manufacturing, branding and sales to build the first large state-owned enterprise covering rubber parts for the whole vehicle industry in China. It is planned to achieve an output value of 10 billion yuan by 2025, ranking among the top five in China's tire industry and the top three in technological research and development in China's tire industry.

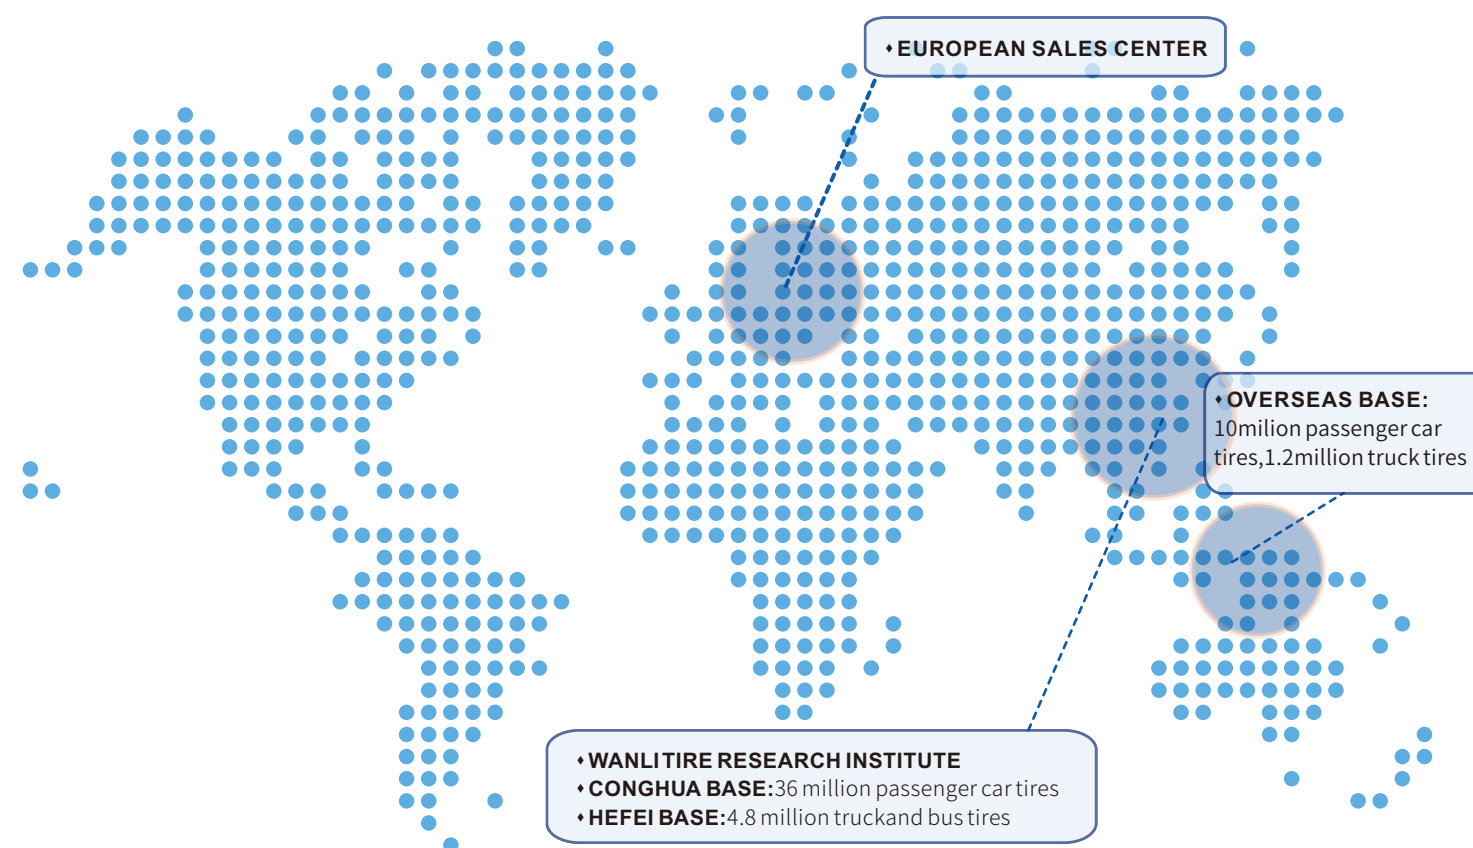

COMFORT SERIES



NP226

SPORT SERIES



NA305



SN3870

RUN-FLAT SERIES



NA302

LIGHT TRUCK SERIES



NL106

SUV/4X4 SERIES



NU025



NU147



NU006



NU031



NU138



SN105

RACING SERIES



SPORT RACING

ALL SEASON SERIES



NC501



NC513

WINTER SERIES



NW211



NW611



NW631



NW312



NW103

PATTERN LIST

COMFORT SERIES 5-6
· NP226

SPORT SERIES 7-10
· NA305 SN3870

RUN-FLAT SERIES 11-12
· NA302

LIGHT TRUCK SERIES 13-14
· NL106

SUV/4X4 SERIES 15-26
· NU025 NU147 NU006 NU031 NU138 SN105

RACING SERIES 27-28
· SPORT RACING

ALL SEASON SERIES 29-32
· NC501 NC513

WINTER SERIES 33-42
· NW211 NW611 NW631 NW312 NW103

NP226

Suitable for small & compact cars



Immersed low noise and light sound

Rim Size:	13-17
Speed Rating:	T-V
Series:	50-80



■ PERFORMANCE BALANCING:

The finite element simulation technique is used to simulate and optimize the tire contour design in order to obtain the optimal imprint shape and uniform grounding pressure distribution, which ensures better handling performance, comfortable ride and uniform wear appearance.

■ Inner Aspect: The strategic implementation of compliant tread blocks on the inner side is engineered to enhance ride comfort and augment wet grip capabilities.

■ Central Rib Structure: A novel approach featuring a continuous, uninterrupted rib configuration is meticulously crafted to deliver elevated levels of tread block stability, thereby optimizing handling dynamics.

■ Outside-The closed shoulder tread design can improve the rigidity and anti-slip performance of tire shoulder tread.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
13	165/65R13	-	77	T	-	5J	170	544	250 412
	165/70R13	-	79	T	-	5J	170	562	250 437
	175/70R13	-	82	T	-	5J	177	576	250 475
	185/70R13	-	86	T	-	5.50B/5½J	189	590	250 530
	155/80R13	-	79	T	-	4½J	157	578	240 437
14	165/60R14	-	75	H	-	5J	170	554	250 387
	185/60R14	-	82	H	-	5½J	189	578	250 475
	155/65R14	-	75	T	-	4½J/4.50B	157	558	250 387
	165/65R14	-	79	T	-	5J	170	570	250 437
	175/65R14	-	82	T	-	5J	177	584	250 475
	185/65R14	-	86	H	-	5½J	189	596	250 530
	165/70R14	-	85	T	XL	5J	170	588	290 515
	175/70R14	-	84	T	-	5J	177	602	250 500
	185/70R14	-	88	H	-	5½J	189	616	250 560
	185/70R14	-	88	T	-	5½J	189	616	250 560
15	175/50R15	-	75	H	-	5½J	182	557	250 387
	185/50R15	-	79	V	-	6J	194	566	250 437
	195/50R15	-	82	V	-	6J	201	577	250 475
	185/55R15	-	82	V	-	6J	194	585	250 475
	195/55R15	-	85	H	-	6J	201	595	250 515
	195/55R15	-	85	V	-	6J	201	595	250 515
	165/60R15	-	81	H	XL	5J	170	579	290 462
	175/60R15	-	81	H	-	5J	177	591	250 462
	185/60R15	-	88	H	XL	5½J	189	603	290 560
	185/60R15	-	88	V	-	5½J	189	603	290 560
16	195/60R15	-	88	H	-	6J	201	615	250 560
	195/60R15	-	88	V	-	6J	201	615	250 560
	205/60R15	-	91	H	-	6J	209	627	250 615
	205/60R15	-	91	H	-	6J	209	627	250 615

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	185/65R15	-	88	H	-	5½J	189	621	250 560
	195/65R15	-	91	H	-	6J	201	635	250 615
	195/65R15	-	91	V	-	6J	201	635	250 615
	195/65R15	-	95	H	XL	6J	201	635	290 690
	205/65R15	-	94	V	-	6J	209	647	250 670
16	215/65R15	-	100	H	XL	6½J	221	661	290 800
	205/70R15	-	96	H	-	6J	209	669	250 710
	215/70R15	-	98	H	-	6½J	221	683	250 750
	185/55R16	-	83	V	-	6J	194	610	250 487
	185/55R16	-	87	V	XL	6J	194	610	290 545
	195/55R16	-	87	V	-	6J	201	620	250 545
	195/55R16	-	91	V	XL	6J	201	620	290 615
	205/55R16	-	91	V	-	6½J	214	632	250 615
	205/55R16	-	94	V	XL	6½J	214	632	290 670
	215/55R16	-	93	V	-	7J	226	642	250 650
17	215/55R16	-	97	V	XL	7J	226	642	290 730
	215/55ZR16	-	97	W	XL	7J	226	642	290 730
	225/55R16	-	99	V	XL	7J	233	654	290 775
	195/60R16	-	89	H	-	6J	201	640	250 580
	205/60R16	-	92	H	-	6J	209	652	250 630
	215/60R16	-	95	H	-	6½J	221	664	250 690
	225/60R16	-	98	V	-	6½J	228	676	250 750
	205/65R16	-	95	V	-	6J	209	672	250 690
	215/65R16	-	98	V	-	6½J	221	686	250 750
	225/50R17	-	94	V	-	7J	233	658	250 670
17	225/55R17	-	97	V	-	7J	233	680	250 730
	225/65R17	-	102	H	-	6½J	228	724	250 850


NA305

suitable for middle-class or luxury car



Outstanding performance Safe and efficient

Rim Size:	16-20
Speed Rating:	V-W
Series:	35-55

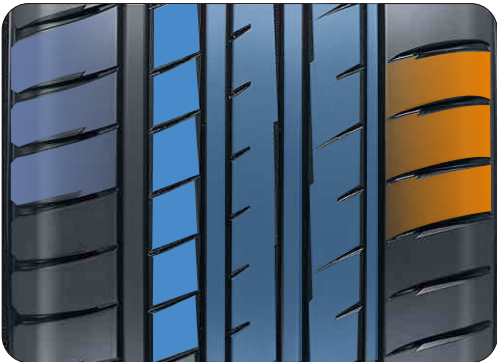

DYNAMIC STABILITY AND CONTROL

■ The incorporation of three robust central through-ribs ensures exceptional handling stability and control. Additionally, the use of smaller sipes within these ribs introduces a controlled level of flexibility, which helps maintain ride comfort without compromising stability.

SUPERIOR WET GRIP AND DRAINAGE EFFICIENCY

■ Four broad vertical grooves facilitate rapid water evacuation, significantly improving wet traction and reducing hydroplaning risk. This design feature contributes to enhanced safety and performance on slippery surfaces.

ENVIRONMENTALLY FRIENDLY AND COST-EFFECTIVE

■ The tread compound features a high proportion of silica, which not only boosts grip and safety on both dry and wet roads but also contributes to lower rolling resistance. This results in improved fuel efficiency, reducing operational costs while maintaining high performance standards.

Finite element simulation is used to optimize the tire profile to achieve the optimal shape of the tire and the balance of ground contact pressure. The higher content of white carbon black is added to the tread design formula to ensure the control and comfort performance.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)	
16	195/45R16	-	84	V	XL	6 ½J	195	582	290	500
	205/45ZR16	-	87	W	XL	7J	206	590	290	545
	195/50R16	-	88	V	XL	6J	201	602	290	560
	205/50ZR16	-	87	W	-	6½J	214	612	250	545
17	205/40ZR17	-	84	W	XL	7½J	212	596	290	500
	215/40ZR17	-	87	W	XL	7½J	218	604	290	545
	245/40ZR17	-	95	W	XL	8½J	248	628	290	690
	205/45ZR17	-	88	W	XL	7J	206	616	290	560
	215/45ZR17	-	91	W	XL	7J	213	626	290	615
	225/45ZR17	-	94	W	XL	7½J	225	634	290	670
	235/45ZR17	-	97	W	XL	8J	236	644	290	730
	245/45ZR17	-	95	W	-	8J	243	652	250	690
	255/45R17	-	102	V	XL	8½J	255	662	290	850
	205/50ZR17	-	93	W	XL	6½J	214	638	290	650
	215/50ZR17	-	95	W	XL	7J	226	648	290	690
	225/50ZR17	-	98	W	XL	7J	233	658	290	750
	235/50ZR17	-	100	W	XL	7½J	245	668	290	800
	205/55ZR17	-	95	W	XL	6 ½J	214	658	290	690
	215/55ZR17	-	98	W	XL	7J	226	668	290	750
	225/55ZR17	-	101	W	XL	7J	233	680	290	825
	235/55ZR17	-	103	W	XL	7½J	245	690	290	875
	225/35ZR18	-	87	W	XL	8J	230	615	290	545
	255/35ZR18	-	94	W	XL	9J	260	635	290	670
	265/35ZR18	-	97	W	XL	9½J	271	643	290	730
18	225/40ZR18	-	92	W	XL	8J	230	637	290	630
	235/40ZR18	-	95	W	XL	8½J	241	645	290	690
	245/40ZR18	-	97	W	XL	8½J	248	653	290	730
	255/40ZR18	-	99	W	XL	9J	260	661	290	775
	215/45ZR18	-	93	W	XL	7J	213	651	290	650
	225/45ZR18	-	95	W	XL	7½J	225	659	290	690
	235/45ZR18	-	98	W	XL	8J	236	669	290	750
	245/45ZR18	-	100	W	XL	8J	243	677	290	800

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)	
18	255/45R18	-	103	W	XL	8½J	255	687	290	875
	235/50ZR18	-	97	W	-	7 ½J	245	693	250	730
	245/50ZR18	-	104	W	XL	7½J	253	703	290	900
	215/55R18	-	95	V	-	7J	226	693	250	690
	215/55R18	-	99	V	XL	7J	226	693	290	775
	225/55R18	-	98	V	-	7J	233	705	250	750
	235/55ZR18	-	100	W	-	7½J	245	715	250	800
	255/55R18	-	109	V	XL	8J	265	737	290	1030
19	215/35ZR19	-	85	W	XL	7½J	218	633	290	515
	225/35ZR19	-	88	W	XL	8J	230	641	290	560
	235/35ZR19	-	91	W	XL	8½J	241	647	290	615
	245/35ZR19	-	93	W	XL	8½J	248	655	290	650
	255/35ZR19	-	96	W	XL	9J	260	661	290	710
	275/35ZR19	-	100	W	XL	9½J	278	675	290	800
	245/40ZR19	-	98	W	XL	8½J	248	679	290	750
	255/40ZR19	-	100	W	XL	9J	260	687	290	800
	275/40ZR19	-	101	W	-	9½J	278	703	250	825
	225/45ZR19	-	96	W	XL	7½J	225	685	290	710
	245/45ZR19	-	102	W	XL	8J	243	703	290	850
	275/45ZR19	-	108	W	XL	9J	273	731	290	1000
20	245/50ZR19	-	105	W	XL	7½J	253	729	290	925
	255/50ZR19	-	107	W	XL	8J	265	739	290	975
	225/55R19	-	99	V	-	7J	233	731	250	775
	255/55ZR19	-	111	W	XL	8J	265	763	290	1090
	225/30ZR20	-	85	W	XL	8J	230	644	290	515
	225/35ZR20	-	90	W	XL	8J	230	666	290	600
	245/35ZR20	-	95	W	XL	8½J	248	680	290	690
	255/35ZR20	-	102	W	XL	9J	260	686	290	850
	315/35ZR20	-	110	W	XL	11J	320	728	290	1060
	245/40ZR20	-	99	W	XL	8½J	248	704	290	775
	275/40ZR20	-	106	W	XL	9½J	278	728	290	950
	245/45ZR20	-	103	W	XL	8J	243	728	290	875



SN3870

Suitable for intermediate cars and sport cars



Super-high performance,
and safe operation and control


Rim Size:	18-26
Speed Rating:	H-W
Series:	25-60



- The width of the tread and the large shoulder blocks provide the tire with outstanding control performance and driving steadily.
- The small grooves within the pattern blocks reduce the rigidity difference between each pattern blocks, the grip performance will be enhanced at the same time.
- The wide and deep transverse grooves with bamboo type longitudinal rib strip design enhance the control performance.

The fuzzy comprehensive evaluation of
the noise spectrum by computer
simulation

The highest noise index: 65.94
The noise energy index: 613.64
A noise level index: 60.05
The fluctuation of the peak of noise index: 7.07
The difference of the dispersion of the peak of
noise index: 8.39
Comprehensive evaluation index: 188.56



Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)	
18	265/60R18	-	110	H	-	8J	272	775	250	1060
20	285/30ZR20	-	99	W	XL	10J	290	680	290	775
	275/45R20	-	110	V	XL	9J	273	756	290	1060
	265/50R20	-	111	V	XL	8½J	277	774	290	1090
	275/55R20	-	117	H	XL	8½J	284	810	290	1285
	295/25ZR22	-	97	W	XL	10½J	301	707	290	730
22	235/30ZR22	-	90	W	XL	8½J	242	701	290	600
	245/30ZR22	-	92	W	XL	8½J	248	707	290	630
	255/30ZR22	-	95	W	XL	9J	260	713	290	690
	265/30ZR22	-	97	W	XL	9½J	271	719	290	730
	265/35R22	-	102	V	XL	9½J	271	745	290	850
	285/35R22	-	106	V	XL	10J	290	759	290	950

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)	
22	265/40R22	-	106	V	XL	9½J	271	771	290	950
	305/40R22	-	114	V	XL	11J	313	803	290	1180
	265/45R22	-	109	V	XL	9J	266	797	290	1030
	305/45R22	-	118	V	XL	10J	303	833	290	1320
24	275/25ZR24	-	95	W	XL	10J	283	747	290	690
	245/30ZR24	-	94	W	XL	8½J	248	758	290	670
	255/30ZR24	-	97	W	XL	9J	260	764	290	730
	275/30ZR24	-	101	W	XL	9½J	278	776	290	825
	295/35R24	-	110	V	XL	10½J	301	816	290	1060
	305/35R24	-	112	V	XL	11J	313	824	290	1120
26	295/30ZR26	-	107	W	XL	10½J	301	838	290	975
	305/30ZR26	-	109	W	XL	11J	313	844	290	1030

NA302


Suitable for intermediate cars and limousines



Top-level Protection for Utmost Safety
Outstanding performance Safe and efficient

SUNNY sidewall support enhancement technology can keep the vehicle traveling at a certain speed for a certain distance after the tire loses pressure. (When the pressure drops to 0 kPa, the vehicle can travel a distance of 80 km to 150 km at a speed of less than 80 km/h under normal use conditions).

Rim Size:	16-19
Speed Rating:	V-Y
Series:	35-55

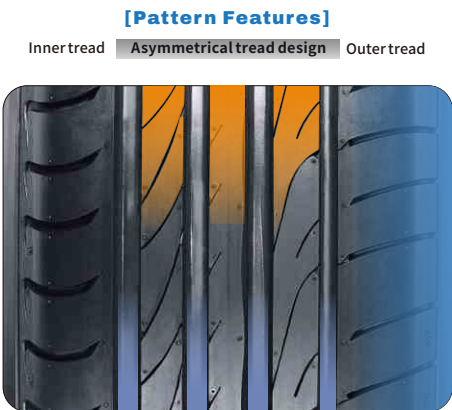

DYNAMIC CONTROL

- The narrow longitudinal center tread provides a larger contact area and its good cornering ability gives excellent control on dry roads.
- The sidewalls feature advanced non-deformation technology greatly improves compression performance and effectively resists deformation from internal traction caused by air leakage from all four tires. n from internal traction caused by air leakage from all four tires.


WATER EXPELLING TREAD

- The staggered height of the central tread enhances wet grip. Internal tread enhances water dispersion.




Special Sidewall Materials

Unique creative rubber materials with excellent heat resistance are used to provide sufficient rigidity to the sidewalls of the tire to prevent loss of vehicle control due to pressure loss if the tire is punctured.



RFT technology(SUNNY sidewall support enhancement technology)

It uses advanced sidewall structure to prevent deformation and maximize the sidewall pressure resistance through a computer simulation system, thus effectively resisting the deformation of the tire's internal tension and traction caused by a flat tire leak.



Special Sidewall Materials

The optimized tire bead component can optimize the stress distribution between the tire and the rim, thus effectively avoiding the tire unseating problem when the tire falls off.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
16	195/55RF16	-	87	V	-	6J	201	620	250 545
	205/55RF16	-	91	V	-	6½J	214	632	250 615
	225/55RF16	-	95	V	-	7J	233	654	250 690
17	205/45ZRF17	-	84	W	-	7J	206	616	250 500
	225/45ZRF17	-	91	W	-	7½J	225	634	250 615
	205/50ZRF17	-	89	W	-	6½J	214	638	250 580
	215/50RF17	-	91	V	-	7J	226	648	250 615
	225/50ZRF17	-	94	W	-	7J	233	658	250 670
	225/55ZRF17	-	97	W	-	7J	233	680	250 730
18	235/55ZRF17	-	99	W	-	7½J	245	690	250 775
	245/35ZRF18	-	88	Y	-	8½J	248	629	250 560
	225/40ZRF18	-	88	W	-	8J	230	637	250 560
	255/40ZRF18	-	95	W	-	9J	260	661	250 690
	275/40ZRF18	-	99	W	-	9½J	278	677	250 775

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
18	225/45ZRF18	-	91	W	-	7½J	225	659	250 615
	245/45ZRF18	-	96	W	-	8J	243	677	250 710
	225/50RF18	-	95	V	-	7J	233	683	250 690
	245/50ZRF18	-	100	W	-	7½J	253	703	250 800
19	215/55RF18	-	95	V	-	7J	226	693	250 690
	235/55RF18	-	100	V	-	7½J	245	715	250 800
	255/55RF18	-	105	V	-	8J	265	737	250 925
	275/35ZRF19	-	96	W	-	9½J	278	675	250 710
	245/40ZRF19	-	94	W	-	8½J	248	679	250 670
	275/40ZRF19	-	101	W	-	9½J	278	703	250 825
	245/45ZRF19	-	98	W	-	8J	243	703	250 750
	285/45RF19	-	107	V	-	9½J	285	739	250 975
	255/50RF19	-	103	V	-	8J	265	739	250 875


NL106

Suitable for business vehicles



High Mileage Anti-load and Wear-resistance

Rim Size:	12-16
Speed Rating:	N-H
Series:	55-85

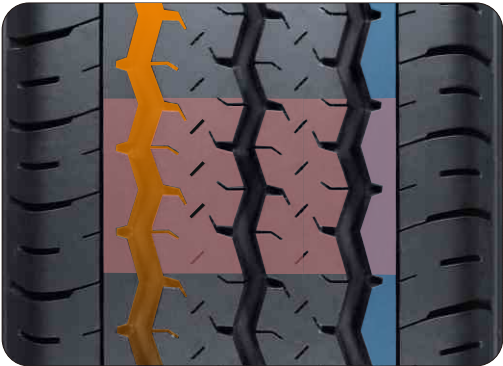

WATER REPELLING TIRE TREAD

■ Efficient water expulsion,ensures safety on wet slippery surfaces.

CENTRAL TREAD PATTERN

■ Enhances tire performance and lifespan.

CLOSED TREAD

■ Enhances tire casing stability, enhances grip, enhances dynamic acceleration.


Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)	
12	155R12C	8/D	88/86	N	-	4½J	157	553	450	560
13	165/70R13C	6/C	88/86	S	-	5J	170	562	375	560
	155R13C	6/C	85/83	R	-	4½ J/4.50B	157	578	350	515
	165R13C	6/C	91/89	S	-	4½ J/4.50B	167	596	375	615
	175R13C	8/D	97/95	R	-	5.00B/5J	177	610	450	730
	175/65R14C	6/C	90/88	T	-	5J	177	584	375	600
14	165/70R14C	6/C	89/87	R	-	5J	170	588	375	580
	175/70R14C	6/C	95/93	T	-	5J	177	602	375	690
	175/75R14C	8/D	99/98	S	-	5J	177	618	475	775
	165R14C	8/D	96/95	T	-	4½J	165	620	450	710
	175R14C	8/D	99/98	R	-	5J	178	634	450	775
	185R14C	8/D	102/100	R	-	5½J	188	650	450	850
	195R14C	8/D	106/104	R	-	5½J	198	666	450	950
	215/65R15C	6/C	104/102	T	-	6½J	221	661	375	900
15	195/70R15C	8/D	104/102	R	-	6J	201	655	450	900
	205/70R15C	8/D	106/104	R	-	6J	209	669	450	950
	215/70R15C	8/D	109/107	S	-	6½J	221	683	450	1030
	225/70R15C	8/D	106/103	R	-	6½J	228	697	450	950
	225/70R15C	8/D	112/110	R	-	6½J	228	697	450	1120
	185R15C	8/D	103/102	R	-	5½J	188	674	450	875

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)	
15	195R15C	8/D	106/104	N	-	5½J	198	690	450	950
	195R15C	8/D	106/104	S	-	5½J	198	690	450	950
16	195/60R16C	6/C	99/97	H	-	6J	201	640	375	775
	215/60R16C	8/D	108/106	T	-	6½J	221	664	475	1000
	195/65R16C	8/D	104/102	T	-	6J	201	660	475	900
	205/65R16C	8/D	107/105	T	-	6J	209	672	475	975
	215/65R16C	8/D	109/107	T	-	6½J	221	686	475	1030
	225/65R16C	8/D	112/110	R	-	6½J	228	698	475	1120
	235/65R16C	8/D	115/113	T	-	7J	240	712	475	1215
	215/70R16C	6/C	108/106	T	-	6½J	221	708	375	1000
	185/75R16C	8/D	104/102	R	-	5J	184	684	475	900
	195/75R16C	8/D	107/105	T	-	5½J	196	698	475	975
	195/75R16C	10/E	110/108	T	-	5½J	196	698	525	1060
	205/75R16C	10/E	113/111	R	-	5½J	203	714	525	1150
215/75R16C	10/E	116/114	R	-	6J	216	728	525	1250	
215/75R16C	10/E	116/114	S	-	6J	216	728	525	1250	
225/75R16C	10/E	121/120	R	-	6J	223	744	575	1450	
235/85R16C	8/D	114/111	S	-	6½J	235	806	475	1180	
225/55R17C	8/D	109/107	T	-	7J	233	680	475	1030	★

★ :coming soon



NU025
Suitable for Urban SUV

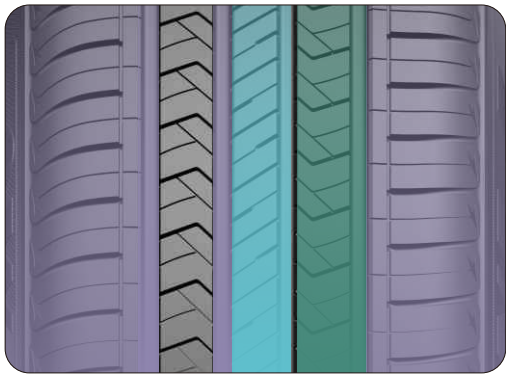

MORE QUIET AND COMFORTABLE

- The closed shoulder groove design helps to reduce the noise.
- The subsidiary groove design can reduce the rigidity of the pattern block, which provides comfortable performance.
- Optimized sequence structure can reduce the noise effectively.

UPGRADED AND MORE ENVIRONMENTAL-FRIENDLY FORMULA

- Enhanced tire traction and reduced rolling resistance with the special high silicon formula.

OUTSTANDING CONTROL ON DRY AND WET GROUNDS

- The shoulder pattern use thin chamfer design, which can prevent pebbles trapping conditions. The thin grooves on the tread provide excellent wet drainage and handling stability. Four wide main grooves on the tread provide good drainage and contribute to wetland security.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	235/75R15	-	105	T	-	6½J	235	733	250 925
	235/60R16	-	100	V	-	7J	240	688	250 800
	215/70R16	-	100	H	-	6½J	221	708	250 800
	225/70R16	-	103	H	-	6½J	228	722	250 875
16	235/70R16	-	106	H	-	7J	240	736	250 950
	245/70R16	-	107	H	-	7J	248	750	250 975
	265/70R16	-	112	T	-	8J	272	778	250 1120
	275/70R16	-	114	T	-	8J	279	792	250 1180
	215/60R17	-	96	V	-	6½J	221	690	250 710
	225/60R17	-	99	V	-	6½J	228	702	250 775
	235/60R17	-	102	H	-	7J	240	714	250 850
	255/60R17	-	106	H	-	7½J	260	738	250 950
17	225/65R17	-	102	V	-	6½J	228	724	250 850
	235/65R17	-	104	H	-	7J	240	738	250 900
	245/65R17	-	111	T	XL	7J	248	750	290 1090
	265/65R17	-	112	T	-	8J	272	776	250 1120
	285/65R17	-	116	H	-	8½J	292	802	250 1250
	245/70R17	-	110	T	-	7J	248	776	250 1060
	265/70R17	-	115	T	-	8J	272	804	250 1215
	235/50ZR18	-	101	W	XL	7½J	245	693	290 825
18	225/55R18	-	98	V	-	7J	233	705	250 750
	235/55R18	-	100	V	-	7½J	245	715	250 800
	225/60R18	-	104	V	XL	6½J	228	727	290 900

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
	235/60R18	-	107	V	XL	7J	240	739	290 975
	245/60R18	-	105	H	-	7J	248	751	250 925
	265/60R18	-	114	H	XL	8J	272	775	290 1180
	285/60R18	-	116	H	-	8½J	292	799	250 1250
18	265/65R18	-	114	H	-	8J	272	801	250 1180
	275/65R18	-	116	T	-	8J	279	815	250 1250
	255/70R18	-	113	T	-	7½J	260	815	250 1150
	265/70R18	-	116	H	-	8J	272	829	250 1250
19	235/40ZR19	-	96	W	XL	8½J	241	671	290 710
	235/55R19	-	101	V	-	7½J	245	741	250 825
	275/40ZR20	-	106	W	XL	9½J	278	728	290 950
	245/45ZR20	-	103	W	XL	8J	243	728	290 875
20	285/50R20	-	116	V	XL	9J	297	794	290 1250
	235/55R20	-	102	V	-	7½J	245	766	250 850
	275/55R20	-	117	V	XL	8½J	284	810	290 1285
	275/60R20	-	115	H	-	8J	279	838	250 1215
	285/30R21	-	100	W	XL	10J	290	705	290 800
	245/35R21	-	96	W	XL	8½J	248	705	290 710
	265/45R21	-	104	W	-	9J	266	771	250 900
	275/50R21	-	113	W	XL	8½J	284	809	290 1150
21	275/40ZR22	-	107	W	XL	9½J	278	779	290 975
	285/45R22	-	114	V	XL	9½J	285	815	290 1180
	275/50R22	-	111	V	-	8½J	284	835	250 1090




NU147
Suitable for Pick-up Trucks



ALL-TERRAIN ABILITY FREELY DRIVES

Rim Size:	15-20
Speed Rating:	R-V
Series:	55-70

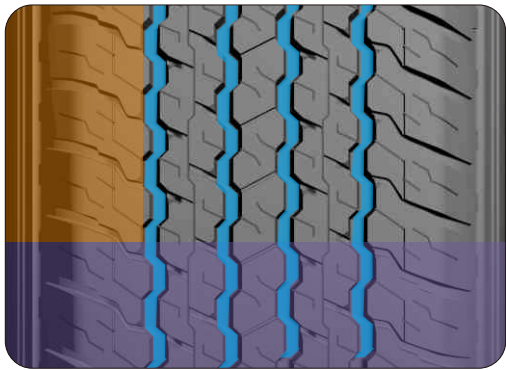

IMPROVED COMFORTABLE
EXPERIENCE

- Tread : Optimized pitch sequence arrangement, multi-pitch design for noise reduction. Numerous evenly distributed knife groove pattern design reduces the rigidity of tread pattern blocks and improves driving comfort.
- Tire shoulder : Closed groove design on the shoulder reduces resonance of columnar airflow and noise.

BETTER HANDLING ON
VARIOUS ROAD CONDITIONS

- Four wide zigzag-shaped grooves bring excellent water-displacement ability, evenly spread stress across the tread, improve traction on mud ground and reduce the chance of gravels being struck in the tread.

STRONGER AND LONG MILEAGE

- The tread uses materials and ingredients designed for good wear-resisting and anti-tearing performance, thus the tread can defend against impacts from flying gravels and prolong tire's service life. Together with enhanced carcass and bead, tire's load-carrying capacity is greatly improved.


Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	255/70R15C	6/C	112/110	S	-	7½J	260	739	375 1120
	265/70R16	-	112	S	-	8J	272	778	250 1120
16	275/70R16	-	114	H	-	8J	279	792	250 1180
	205R16C	6/C	106/104	R	-	6J	208	734	350 950
17	265/65R17	-	112	T	-	8J	272	776	250 1120
	275/65R17	-	115	H	-	8J	279	790	250 1215

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
17	285/65R17	-	116	H	-	8½J	292	802	250 1250
	265/70R17	-	115	S	-	8J	272	804	250 1215
18	265/60R18	-	110	H	-	8J	272	775	250 1060
	285/60R18	-	116	H	-	8½J	292	799	250 1250
20	265/55R20	-	113	V	XL	8½J	277	800	290 1150



NU006

Suitable for mid-large SUV & off-road vehicles

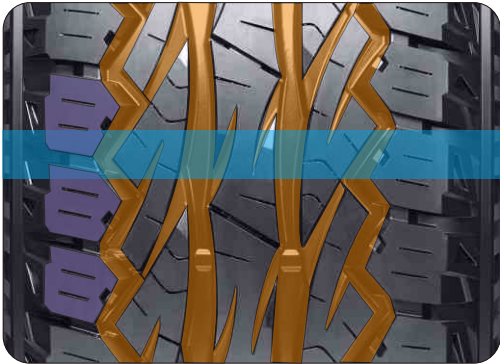

- Tiger-teeth tread pattern provides excellent grip with great mountain and off-road performance.
- The main structure consists of two inner water expelling treads and two outer water expelling treads, providing excellent water expelling performance on mud and wet road conditions.

- Special 3D water expelling tread with enhanced structure prevents stress concentration on the tread and pebbles trapping conditions.

INTERLEAVING SHOULDER TREAD PATTERN AND ARMOR SIDEWALL

- Guarantees exceptional control on wet and sandy road conditions, effectively avoid wearing during demanding road condition.

3D SHOULDER DESIGN

- For exceptional control on wet and sandy road conditions, effectively avoid wearing during demanding road condition.

Rim Size: 15-20
Speed Rating: Q-V
Series: 50-75

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	205/65R15	-	94	H	-	6J	209	647	250 670
	205/70R15	-	96	H	-	6J	209	669	250 710
15LT	215/75R15LT	6/C	100/97	S	-	6J	216	703	350 800
	31x10.50R15LT	6/C	109	Q	-	8½J	268	775	350 1030
16	205/60R16	-	92	H	-	6J	209	652	250 630
	235/70R16	-	106	S	-	7J	240	736	250 950
	245/70R16	-	111	T	XL	7J	248	750	290 1090
	255/70R16	-	111	T	-	7½J	260	764	250 1090
	265/70R16	-	112	S	-	8J	272	778	250 1120
	275/70R16	-	114	S	-	8J	279	792	250 1180
	LT245/75R16	6/C	108/104	S	-	7J	248	774	350 1000
	LT265/75R16	10/E	123/120	S	-	7½J	267	804	550 1550

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
16	LT285/75R16	10/E	126/123	R	-	8J	286	834	550 1700
	265/65R17	-	112	S	-	8J	272	776	250 1120
	275/65R17	-	115	S	-	8J	279	790	250 1215
17	285/65R17	-	116	S	-	8½J	292	802	250 1250
	LT265/70R17	10/E	121/118	S	-	8J	272	804	550 1450
18	LT285/70R17	10/E	121/118	R	-	8½J	292	832	550 1450
	265/60R18	-	110	H	-	8J	272	775	250 1060
	285/60R18	-	116	H	-	8½J	292	799	250 1250
20	265/50R20	-	111	V	XL	8½J	277	774	290 1090
	285/50R20	-	116	H	XL	9J	297	794	290 1250
	275/55R20	-	117	H	XL	8½J	284	810	290 1285



NU031
All-road off-road vehicles



Rim Size: 15-16
Speed Rating: S-H
Series: 60-75



TREAD SELF-CLEANING TECHNOLOGY,
NO FEAR OF SAND

■ The tread is designed with three-dimensional sand-removing stone stepped grooves and reinforcing ribs to prevent stress concentration on the tread, effectively prevent gravel inclusion and avoid tire damage due to gravel inclusion.

GRASP THE GROUND STRONGLY AND
DEAL WITH ALL KINDS OF ROAD
CONDITIONS EASILY.

■ The rough block pattern of "butterfly" arrangement provides strong grip and ensures the off-road performance of tires in complex road conditions. Staggered serrated shoulder flowers ensure the handling performance of tires on unpaved roads.



THE BODY OF KING KONG, GUARDING
IN ALL DIRECTIONS

- 1. Tread: adopt high wear-resistant and tear-resistant formula, puncture-resistant;
- 2. Carcass: with double-layer carcass skeleton structure, stronger;
- 3. Sidewall: 3D peak design can effectively resist external impact; Three-pronged approach, casting the body of King Kong.
- The tires are stronger, more wear-resistant, and safer to drive without fear of pricking.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	205/65R15	-	94	H	-	6J	209	647	250 670
	205/70R15	-	96	H	-	6J	209	669	250 710
	235/75R15	-	109	T	XL	6½J	235	733	290 1030
15LT	31×10.50R15LT	6/C	109	S	-	8½J	268	775	350 1030

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
16	205/60R16	-	92	H	-	6J	209	652	250 630
	235/70R16	-	106	T	-	7J	240	736	250 950
	245/70R16	-	111	T	XL	7J	248	750	290 1090
	255/70R16	-	111	T	-	7½J	260	764	250 1090
	265/70R16	-	112	T	-	8J	272	778	250 1120



NU138

Suitable for off-road cars



Rim Size:	16-22
Speed Rating:	Q-T
Series:	55-75



ROUGH PATTERNS, NOT AFRAID OF MOUNTAIN CHALLENGES

■ Unique double-wide, zigzag self-cleaning main ditch, excellent drainage capacity of wetland; With open shoulder block design, it provides strong traction and lateral stability, and has stronger grip on muddy and sandy roads.

STRONGER AND MORE DURABLE

■ The tread adopts customized formula with high wear resistance and tear resistance, which can effectively resist the impact of pavement sand and prolong the service life. Combined with the reinforced carcass and bead design, the carcass is solid, which greatly improves the load resistance of the tire.

ACTIVE NOISE REDUCTION TO IMPROVE DRIVING COMFORT

■ The unique design of shuttle X armor central tread pattern can not only effectively improve the puncture resistance, but also optimize the grounding cut-in angle. Combined with the multi-directional zigzag groove active noise reduction technology, the resonance of columnar airflow is reduced, and the pitch arrangement of the whole tread is optimized to reduce the passing noise and improve the driving comfort.



■ Three-dimensional white design beside flowers shows a variety of visual experiences.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
16	245/70R16LT	8/D	113/110 S	-	7J	248	750	450	1150
	265/70R16LT	8/D	117/114 Q	-	8J	272	778	450	1285
	LT245/75R16	10/E	120/116 S	-	7J	248	774	550	1380
17	265/65R17LT	10/E	120/117 Q	-	8J	272	776	550	1400
	245/70R17LT	10/E	119/116 S	-	7J	248	776	550	1360

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)	
17	LT265/70R17	10/E	121/118	S	-	8J	272	804	550	1450
18	265/60R18LT	10/E	119/116	Q	-	8J	272	775	550	1360
20	275/55R20	-	117	T	XL	8½J	284	810	290	1285
	33×12.50R20LT	10/E	114	Q	-	10J	318	832	450	1180
22	33×12.50R22LT	10/E	109	Q	-	10J	318	832	450	1030



SN105

Professional off-road vehicle use



Grip drive anti-tear operation and control on dry and wet grounds

Rim Size:	15-22
Speed Rating:	K-S
Series:	65-75



- The powerful profile design provides superior driving performance and grip capability. Skid resistance ensures outstanding performance in mud and unpaved road.
- Open shoulder design provides more powerful grip and traction.
- Evenly distributed grooves provide excellent wet driving performance and braking performance.
- Leading anti-wear compound reduces wear and longer life span.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)	
15	LT235/75R15	6/C	104/101	S	-	6½J	235	739	350	900
	30×9.50R15LT	6/C	104	Q	-	7½J	240	756	350	900
	31×10.50R15LT	6/C	109	Q	-	8½J	268	781	350	1030
	32×11.50R15LT	6/C	113	Q	-	9J	290	807	350	1150
16	LT265/70R16	8/D	117/114	Q	-	8J	272	784	450	1285
	LT245/75R16	6/C	108/104	Q	-	7J	248	780	350	1000
	LT265/75R16	10/E	123/120	Q	-	7½J	267	810	550	1550
17	LT265/70R17	10/E	121/118	Q	-	8J	272	810	550	1450
	LT285/70R17	10/E	121/118	R	-	8½J	292	838	550	1450
	LT295/70R17	10/E	121/118	Q	-	8½J	299	852	550	1320
	35×12.50R17LT	10/E	121	Q	-	10J	318	883	450	1450

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)	
18	LT285/65R18	10/E	125/122	Q	-	8½J	292	833	550	1650
	33×12.50R18LT	10/E	118	Q	-	10J	318	832	450	1320
	35×12.50R18LT	8/D	118	Q	-	10J	318	883	350	1320
20	LT275/65R20	10/E	126/123	Q	-	8J	279	872	550	1700
	33×12.50R20LT	10/E	114	Q	-	10J	318	832	450	1180
	35×12.50R20LT	10/E	121	Q	-	10J	318	883	450	1450
	37×13.50R20LT	10/E	127	Q	-	11J	345	934	450	1750
22	33×12.50R22LT	10/E	109	Q	-	10J	318	832	450	1030
	35×12.50R22LT	10/E	117	Q	-	10J	318	883	450	1285
	37×13.50R22LT	10/E	123	K	-	11J	345	934	450	1550



SPORT RACING

Suitable for racing cars sports cars



KNURLING-DESIGNED GROOVES

■ Enlarged drainage grooves with knurling pattern designed at the bottom expedite drainage, improving safety performance during rainy days.

LARGE CENTER RUBBER BAR WITH SMALL TRAPS

■ Insures the performance of straight driving, and effectively breaks the water film increasing the grip on wet ground.

BIG-SHOULDER DESIGN

■ Bigger shoulder design brings more tire-road contact and less tread deformation. Tiny steel on tire shoulder strengthens the grip during cornering.

COMPETITIVE PATTERN

■ Competitive pattern with wide tread sharply increases the tire-road contact, making better grip and steering force during cornering.

DOUBLE LONGITUDINAL PATTERN

■ Main pattern in center ensures the stability during high-speed straight driving. Exterior pattern provides strong grip during rapid cornering with its hard-enough exterior parts.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)	
15	195/50R15	-	82	W	-	6J	201	577	250	475
	195/55R15	-	85	V	-	6J	201	595	250	515
17	235/40R17	-	90	W	-	8½J	241	620	250	600
	215/45R17	-	91	W	XL	7J	213	626	290	615
	235/45R17	-	94	W	-	8J	236	644	250	670
18	265/35R18	-	97	W	XL	9½J	271	643	290	730
	285/35R18	-	101	W	XL	10J	290	657	290	825
	225/40R18	-	88	W	-	8J	230	637	250	560

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
18	235/40R18	-	91 W	-	8½J	241	645	250	615
	245/40R18	-	93 W	-	8½J	248	653	250	650
	275/40R18	-	103 W	XL	9½J	278	677	290	875
	245/45R18	-	100 W	XL	8J	243	677	290	800
	255/50R18	-	106 V	XL	8J	265	713	290	950
	265/50R18	-	103 W	-	8½J	277	722	250	875
	255/55R18	-	109 V	XL	8J	265	737	290	1030
	265/60R18	-	114 V	XL	8J	272	775	290	1180



NC501

Suitable for all serson



Double layer tread along with all season formula decreases rolling resistance, tire weight and optimizes performance on dry and wet roads. Low noise design is achieved by noise optimization software with regards to pitch misalignment and sequence.

Rim Size: 13-20
Speed Rating: T-Y
Series: 35-80



- Single directional pattern gives excellent stability at high speed, stronger snow expelling and water drainage performance.
- Massive quantity of transverse grooves strengthen performance in snow expelling , water drainage and other indexes including anti-wear, braking, controlling and noise.
- Narrow Circumferential groove and wider contact surface help to enhance tire grip and safety on wet roads.
- Large quantity of tiny steel straps in the middle guarantee good performance on snow and small amount of steel design on the shoulder ensures excellent performance on dry and wet roads.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
13	155/70R13	-	75	T	-	4½J	157	548	250 387
	165/70R13	-	79	T	-	5J	170	562	250 437
	155/80R13	-	79	T	-	4.50B/4½J	157	578	240 437
14	185/60R14	-	82	H	-	5½J	189	578	250 475
	155/65R14	-	75	T	-	4.50B/4½J	157	558	250 387
	175/65R14	-	82	T	-	5J	177	584	250 475
	165/70R14	-	81	T	-	5J	170	588	250 462
	175/70R14	-	88	T	XL	5J	177	602	290 560
15	195/50R15	-	82	V	-	6J	201	577	250 475
	185/55R15	-	86	H	XL	6J	194	585	290 530
	185/60R15	-	88	H	XL	5½J	189	603	290 560
	195/60R15	-	88	H	-	6J	201	615	250 560
	175/65R15	-	84	H	-	5J	177	609	250 500
	185/65R15	-	88	H	-	5½J	189	621	250 560
	195/65R15	-	91	H	-	6J	201	635	250 615
	195/65R15	-	95	H	XL	6J	201	635	290 690
	215/65R15	-	96	H	-	6½J	221	661	250 710
	195/45R16	-	84	V	XL	6½J	195	582	290 500
16	215/45R16	-	90	V	XL	7J	213	600	290 600
	195/55R16	-	91	V	XL	6J	201	620	290 615
	205/55R16	-	91	V	-	6½J	214	632	250 615
	205/55R16	-	94	V	XL	6½J	214	632	290 670
	215/55R16	-	97	V	XL	7J	226	642	290 730
	205/60R16	-	96	V	XL	6J	209	652	290 710
	215/70R16	-	100	H	-	6½J	221	708	250 800
	205/45ZR17	-	88	W	XL	7J	206	616	290 560
	215/45ZR17	-	91	W	XL	7J	213	626	290 615
	225/45ZR17	-	94	W	XL	7½J	225	634	290 670
17	235/45ZR17	-	97	W	XL	8J	236	644	290 730
	245/45ZR17	-	99	W	XL	8J	243	652	290 775
	205/50ZR17	-	93	W	XL	6½J	214	638	290 650
	215/50ZR17	-	95	W	XL	7J	226	648	290 690
	225/50ZR17	-	98	W	XL	7J	233	658	290 750
	215/55ZR17	-	98	W	XL	7J	226	668	290 750
	225/55ZR17	-	101	W	XL	7J	233	680	290 825
	235/55ZR17	-	103	W	XL	7½J	245	690	290 875
	215/60R17	-	100	V	XL	6½J	221	690	290 800
	225/40ZR18	-	92	W	XL	8J	230	637	290 630
18	225/45R18	-	95	V	XL	7½J	225	659	290 690
	215/55R18	-	99	V	XL	7J	226	693	290 775

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
14	185/55R14	-	80	H	-	6J	194	560	250 450
	165/60R14	-	79	H	XL	5J	170	554	290 437
	165/65R14	-	79	T	-	5J	170	570	250 437
	185/65R14	-	86	H	-	5½J	189	596	250 530
15	195/55R15	-	85	V	-	6J	201	595	250 515
	165/60R15	-	81	H	XL	5J	170	579	290 462
	165/65R15	-	81	H	-	5J	170	595	250 462
	205/65R15	-	94	V	-	6J	209	647	250 670
	205/45ZR16	-	87	W	XL	7J	206	590	290 545
16	185/50R16	-	81	V	-	6J	194	592	250 462
	195/50R16	-	88	V	XL	6J	201	602	290 560
	185/55R16	-	87	V	XL	6J	194	610	290 545
	225/55ZR16	-	99	W	XL	7J	233	654	290 775
	215/60R16	-	99	V	XL	6½J	221	664	290 775
	215/65R16	-	102	V	XL	6½J	221	686	290 850
	215/40R17	-	87	V	XL	7½J	218	604	290 545
	205/55ZR17	-	95	W	XL	6½J	214	658	290 690
	225/60R17	-	103	V	XL	6½J	228	702	290 875
	225/65R17	-	106	V	XL	6½J	228	724	290 950
17	235/65ZR17	-	108	W	XL	7J	240	738	290 1000
	215/40ZR18	-	89	W	XL	7½J	218	629	290 580
	235/40ZR18	-	95	Y	XL	8½J	241	645	290 690
	245/40ZR18	-	97	W	XL	8½J	248	653	290 730
	215/45R18	-	93	V	XL	7J	213	651	290 650
	235/45ZR18	-	98	Y	XL	8J	236	669	290 750
	245/45ZR18	-	100	W	XL	8J	243	677	290 800
	215/50ZR18	-	92	W	-	7J	226	673	250 630
	225/50ZR18	-	99	W	XL	7J	233	683	290 775
	235/50ZR18	-	101	W	XL	7½J	245	693	290 825
18	225/55R18	-	98	V	-	7J	233	705	250 750
	235/55R18	-	104	V	XL	7½J	245	715	290 900
	225/60R18	-	104	V	XL	6½J	228	727	290 900
	235/60R18	-	107	V	XL	7J	240	739	290 975
	235/35ZR19	-	91	Y	XL	8½J	241	647	290 615
	255/35ZR19	-	96	Y	XL	9J	260	661	290 710
	225/40ZR19	-	93	Y	XL	8J	230	663	290 650
	235/40ZR19	-	96	Y	XL	8½J	241	671	290 710
	245/40ZR19	-	98	Y	XL	8½J	248	679	290 750
	225/45ZR19	-	96	Y	XL	7½J	225	685	290 710
19	235/45ZR19	-	99	Y	XL	8J	236	695	290 775
	245/45ZR19	-	102	W	XL	8J	243	703	290 850
	235/50R19	-	99	V	-	7½J	245	719	290 875
	255/50R19	-	107	V	XL	8J	265	739	290 975
	205/55ZR19	-	97	W	XL	6½J	214	709	290 730
	225/55R19	-	99	V	-	7J	233	731	250 775
	235/55ZR19	-	105	W	XL	7½J	245	741	290 925
	235/35ZR20	-	92	W	XL	8½J	241	672	290 630
	255/45ZR20	-	105	W	XL	8½J	255	738	290 925
	195/55R20	-	95	H	XL	6J	201	722	290 690

★:coming soon

NC513

Suitable for commercial light trucks



REINFORCED CARCASS, THE BETTER LOAD-BEARING PERFORMANCE

■ Designed for commercial light truck with double carcass structure, it has better load-bearing performance.

SUPERIOR WETLAND PERFORMANCE AND SKID RESISTANCE

- The tread groove design with s shape on both sides and z shape in the middle which can greatly enhance the tire drainage performance.
- The wide groove and asymmetrical pattern design bring excellent handling stability and outstanding drainage performance on icy and wet road .

EXCELLENT FOUR SEASONS ADAPTABILITY PERFORMANCE

■ Bring excellent performance to the Tire no matter i n Spring, Summer, Autumn or Winter, by using speci al All-season tire compound.



Pattern joint



The shape of groovelike "T"



Have the difference between high and low at the edge of shoulder



The more close pattern groove

Rim Size: 15-16
Speed Rating: R-T
Series: 65-75

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)	
15	195/70R15C	8/D	104/102	R	-	6J	201	655	450	900
	215/70R15C	8/D	109/107	R	-	6½J	221	683	450	1030
16	195/65R16C	8/D	104/102	T	-	6J	201	660	475	900
	205/65R16C	8/D	107/105	R	-	6J	209	672	475	975
	215/65R16C	8/D	109/107	R	-	6½J	221	686	475	1030

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)	
16	225/65R16C	8/D	112/110	R	-	6½J	228	698	475	1120
	235/65R16C	8/D	115/113	R	-	7J	240	712	475	1215
	195/75R16C	8/D	107/105	T	-	5½J	196	698	475	975
	215/75R16C	8/D	113/111	R	-	6J	216	728	475	1150
	225/75R16C	10/E	121/120	R	-	6J	223	744	575	1450



NW211

Suitable for icy and snowy road



DRAINAGE AND SLIP RESISTANCE

■ Three longitudinal grooves designed on tread improve slip resistant performance on snowy roads in winter.

HERRING BONE PATTERNS PROVIDING STRONGER GRIP

■ Herring bone patterns on tread have strong ice breaking and water drainage performance, and big ground touching areas ensures the characteristics of tires on icy and snowy roads.

BETTER OPERATION AND CONTROL PERFORMANCE

■ Asymmetric pattern design optimizes the performance of tires on dry and wet grounds, and improves comprehensive operation and control of tires on icy and snowy roads.

Rim Size:	15-21
Speed Rating:	T-V
Series:	35-65

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	195/50R15	-	82	H	-	6J	201	577	250 475
	185/55R15	-	86	H	-	6J	194	585	290 530
	195/55R15	-	85	H	XL	6J	201	595	250 515
16	195/55R16	-	87	H	-	6J	201	620	250 545
	205/55R16	-	91	H	-	6½J	214	632	250 615
	205/55R16	-	91	T	-	6½J	214	632	250 615
	215/55R16	-	97	H	-	7J	226	642	290 730
	225/55R16	-	99	H	XL	7J	233	654	290 775
	205/60R16	-	96	H	XL	6J	209	652	290 710
17	215/60R16	-	99	H	XL	6½J	221	664	290 775
	225/60R16	-	102	H	XL	6½J	228	676	290 850
	225/60R16	-	102	T	XL	6½J	228	676	290 850
	235/60R16	-	100	H	XL	7J	240	688	250 800
	215/65R16	-	98	H	-	6½J	221	686	250 750
	215/45R17	-	91	V	-	7J	213	626	290 615
18	225/45R17	-	94	V	XL	7½J	225	634	290 670
	235/45R17	-	97	V	XL	8J	236	644	290 730
	205/50R17	-	93	V	XL	6½J	214	638	290 650
	215/50R17	-	95	V	XL	7J	226	648	290 690
	225/50R17	-	98	V	XL	7J	233	658	290 750
	205/55R17	-	95	V	XL	6½J	214	658	290 690

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
17	215/55R17	-	98	V	XL	7J	226	668	290 750
	225/55R17	-	101	V	XL	7J	233	680	290 825
	235/55R17	-	103	V	XL	7½J	245	690	290 875
18	225/40R18	-	92	V	XL	8J	230	637	290 630
	235/40R18	-	95	V	XL	8½J	241	645	290 690
	245/40R18	-	97	V	XL	8½J	248	653	290 730
	235/45R18	-	98	V	XL	8J	236	669	290 750
	225/50R18	-	99	V	XL	7J	233	683	290 775
	255/55R18	-	109	V	XL	8J	265	737	290 1030
19	225/35R19	-	88	V	XL	8J	230	641	290 560
	235/35R19	-	91	V	XL	8½J	241	647	290 615
	245/35R19	-	93	V	XL	8½J	248	655	290 650
	255/35R19	-	96	V	XL	9J	260	661	290 710
	255/40R19	-	100	V	XL	9J	260	687	290 800
	245/45R19	-	102	V	XL	8J	243	703	290 850
20	235/55R19	-	105	V	XL	7½J	245	741	290 925
	315/35R20	-	110	V	XL	11J	320	728	290 1060
	245/40R20	-	99	V	XL	8½J	248	704	290 775
	275/40R20	-	106	V	XL	9½J	278	728	290 950
	285/50R20	-	116	H	XL	9J	297	794	290 1250
	295/40R21	-	111	V	XL	10½J	301	769	290 1090



NW611

Suitable for icy and snowy road



■ Advanced piece-shape pattern design with special formula for ice and snow provides newly-developed tread with better flexibility and bigger ground area when tires are driven on a snowy road. Snow columns are not easy to be cut off, and tires can be provided with more powerful driving forces.

MORE BALANCED PERFORMANCE

■ Symmetric pattern design and big shoulder pattern piece design, which can produce lateral forces when tires are driven, improve traction on snowy and icy roads. It significantly improves driving and braking performance, and optimizes driving precision on dry and wet roads to the maximum, more helpful to reduce driving noise.

MORE LASTING EFFECT

■ Special formula for ice and snow can ensure that tires maintain a very good winter performance in the middle and late period of wearing.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
13	155/70R13	-	75	T	-	4½J	157	548	250 387
	165/70R13	-	79	T	-	5J	170	562	250 437
	165/70R13	-	83	T	XL	5J	170	562	290 487
	175/70R13	-	82	T	-	5J	177	576	250 475
	155/80R13	-	79	T	-	4½J	157	578	240 437
14	185/55R14	-	80	T	-	6J	194	560	250 450
	185/60R14	-	86	T	XL	5½J	189	578	290 530
	175/65R14	-	86	T	XL	5J	177	584	290 530
	185/65R14	-	86	T	-	5½J	189	596	250 530
	165/70R14	-	85	T	XL	5J	170	588	290 515
	175/70R14	-	88	T	XL	5J	177	602	290 560
	185/70R14	-	88	T	-	5½J	189	616	250 560

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	185/55R15	-	86	H	XL	6J	194	585	290 530
	185/60R15	-	84	T	-	5½J	189	603	250 500
	185/60R15	-	88	T	XL	5½J	189	603	290 560
	195/60R15	-	88	T	-	6J	201	615	250 560
	185/65R15	-	88	T	-	5½J	189	621	250 560
16	195/65R15	-	91	H	-	6J	201	635	250 615
	195/65R15	-	91	T	-	6J	201	635	250 615
	195/65R15	-	95	T	XL	6J	201	635	290 690
	205/65R15	-	94	T	-	6J	209	647	250 670
	205/65R15	-	99	T	XL	6J	209	647	290 775
	215/65R15	-	96	H	-	6½J	221	661	250 710
	205/55R16	-	91	T	-	6½J	214	632	250 615



NW631

Suitable for saloon car/suv in icy and snowy road conditions



DESIGNED FOR ICY AND SNOWY ROAD CONDITIONS

■ With optimized nail hole arrangement, the entire tire can be equipped with 200 snow nails (Here take 205/55R16 as an example, different sizes have different circumstances). The Inlaid nail anti-skid technology shows super-strong grip capability on snowy and icy roads.

SINGLE-ORIENTED PATTERN

■ Directional pattern design can effectively drain and remove snow, enhancing performance on wet ground. This design on tread obviously improves skid resistance performance on snowy and icy roads in winter.

MORE SUBTLE DESIGN CAN ENHANCE THE PERFORMANCE OF HANDLING AND BRAKING PERFORMANCE

■ As you can see, tire pattern is concave and convex shape at the edge of the groove and the sharp teeth shape in the middle of the groove. The shape of each pattern likes lightning. The design of these pattern grooves can effectively drain and remove snow, also significantly enhance operation and braking performance in icy and snowy road conditions.

Inlaid nail anti-skid technology and Super-strong grip;
Excellent wetland performance and effective prevention of skidding;
Superior handling and braking performance.

Rim Size:	13-20
Speed Rating:	Q-H
Series:	40-80


Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)	
13	175/70R13	-	82	T	-	5J	177	576	250	475
	155/80R13	-	83	Q	XL	4½J	157	578	280	487
14	185/60R14	-	82	T	-	5½J	189	578	250	475
	175/65R14	-	86	T	XL	5J	177	584	290	530
	185/65R14	-	86	T	-	5½J	189	596	250	530
15	185/60R15	-	84	T	-	5½J	189	603	250	500
	185/65R15	-	88	H	-	5½J	189	621	250	560
	195/65R15	-	95	T	XL	6J	201	635	290	690
16	205/55R16	-	94	T	XL	6½J	214	632	290	670
	205/60R16	-	92	H	-	6J	209	652	250	630
	215/65R16	-	102	H	XL	6½J	221	686	290	850
17	225/45R17	-	94	H	XL	7½J	225	634	290	670
	225/50R17	-	98	H	XL	7J	233	658	290	750

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)	
17	215/55R17	-	98	H	XL	7J	226	668	290	750
	225/55R17	-	101	H	XL	7J	233	680	290	825
	215/60R17	-	96	H	-	6½J	221	690	250	710
	225/60R17	-	103	H	XL	6½J	228	702	290	875
	225/65R17	-	102	T	-	6½J	228	724	250	850
	235/65R17	-	104	T	-	7J	240	738	250	900
18	225/40R18	-	92	H	XL	8J	230	637	290	630
	225/45R18	-	95	H	XL	7½J	225	659	290	690
	225/55R18	-	102	H	XL	7J	233	705	290	850
	225/60R18	-	104	H	XL	6½J	228	727	290	900
	235/60R18	-	107	H	XL	7J	240	739	290	975
20	275/55R20	-	117	H	XL	8½J	284	810	290	1285



NW312

Use of car /SUV in ice and snow conditions

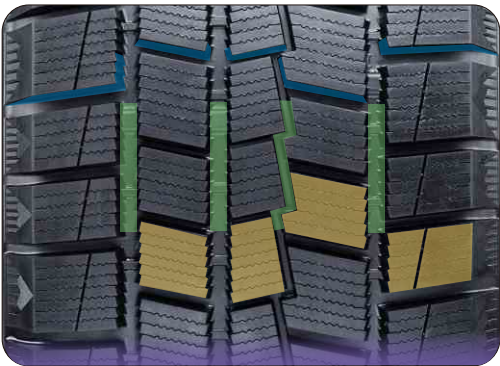

EXCELLENT BRAKING PERFORMANCE

■ The reinforced bars and jagged design provide excellent braking performance that ensures safety in driving.



PRECISE CONTROL

■ The wide groove and asymmetrical pattern design bring excellent handling stability and outstanding drainage performance on snowy and icy roads.

STRONG GRIP

■ The increased number of lugs and grooves on tread provide better snow traction and drainage performance, showing excellent grip capability on snowy and icy roads.

In the early stage of development, we optimized stress distribution on tire by FE simulation analysis. The actual footprint of tire shows that the stress distribution is uniform and the grounding area is increased, indicating the improved stability and safety of the tire when traveling on snowy and icy roads.

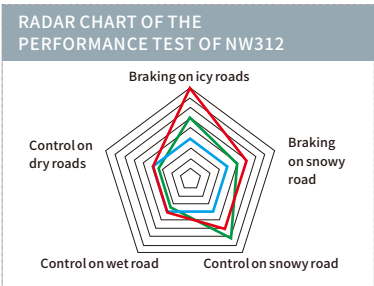

International brand B
International brand G
SUNNY NW312

Impressive braking and cornering ability in winter driving conditions

Rim Size: 13-22
Speed Rating: Q-H
Series: 30-70

Rim	Size	PR	LI&SS	XL	Std.	Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
13	175/60R13	-	77	Q	-	5.00B/5J	177	540	250	412
	155/65R13	-	73	Q	-	4.50B/4½J	157	532	250	365
	165/65R13	-	77	Q	-	5.00B/5J	170	544	250	412
	165/70R13	-	83	Q	XL	5.00B/5J	170	562	290	487
	175/70R13	-	82	Q	-	5.00B/5J	177	576	250	475
14	165/60R14	-	75	Q	-	5.00B/5J	170	554	250	387
	175/60R14	-	79	Q	-	5.00B/5J	177	566	250	437
	185/60R14	-	82	Q	-	5½J	189	578	250	475
	195/60R14	-	86	Q	-	6J	201	590	250	530
	155/65R14	-	75	Q	-	4.50B/4½J	157	558	250	387
15	175/65R14	-	82	Q	-	5.00B/5J	177	584	250	475
	185/65R14	-	90	Q	XL	5½J	189	596	290	600
	165/70R14	-	85	Q	XL	5.00B/5J	170	588	290	515
	175/70R14	-	88	Q	XL	5.00B/5J	177	602	290	560
	185/70R14	-	88	Q	-	5½J	189	616	250	560
16	185/55R15	-	86	Q	XL	6J	194	585	290	530
	195/55R15	-	85	Q	-	6J	201	595	250	515
	185/60R15	-	84	Q	-	5½J	189	603	250	500
	195/60R15	-	88	Q	-	6J	201	615	250	560
	175/65R15	-	84	Q	-	5J	177	609	250	500
17	185/65R15	-	88	Q	-	5½J	189	621	250	560
	195/65R15	-	91	Q	-	6J	201	635	250	615
	205/65R15	-	94	Q	-	6J	209	647	250	670
	205/70R15	-	96	Q	-	6J	209	669	250	710
	205/55R16	-	91	S	-	6½J	214	632	250	615
18	215/55R16	-	97	Q	XL	7J	226	642	290	730
	225/55R16	-	99	Q	XL	7J	233	654	290	775
	195/60R16	-	89	Q	-	6J	201	640	250	580
	205/60R16	-	92	Q	-	6J	209	652	250	630
	215/60R16	-	99	Q	XL	6½J	221	664	290	775
19	225/60R16	-	98	Q	-	6½J	228	676	250	750
	205/65R16	-	95	Q	-	6J	209	672	250	690
	215/65R16	-	98	Q	-	6½J	221	686	250	750
	215/70R16	-	100	Q	-	6½J	221	708	250	800
	225/45R17	-	91	T	-	7½J	225	634	250	615
20	235/45R17	-	97	S	XL	8J	236	644	290	730
	255/45R17	-	102	S	XL	8½J	255	662	290	850
	215/50R17	-	95	S	XL	7J	226	648	290	690
	235/70R16	-	106	S	-	7J	240	736	250	950
	245/70R16	-	107	S	-	7J	248	750	250	975
21	255/70R16	-	111	S	-	7½J	260	764	250	1090
	265/70R16	-	112	S	-	8J	272	778	250	1120
	205/50R17	-	89	T	-	6½J	214	638	250	580
	245/40R18	-	93	T	-	8½J	248	653	250	650
	235/45R18	-	94	T	-	8J	236	669	250	670
22	225/50R18	-	95	T	-	7J	233	683	250	690
	245/50R18	-	100	T	-	7½J	253	703	250	800
	225/55R18	-	98	T	-	7J	233	705	250	750
	265/65R18	-	114	T	-	8J	272	801	250	1180
	275/35R19	-	96	H	-	9½J	278	675	250	710
23	235/40R19	-	92	H	-	8½J	241	671	250	630
	245/40R19	-	94	H	-	8½J	248	679	250	670
	275/40R19	-	101	H	-	9½J	275	703	250	825
	235/45R19	-	95	H	-	8J	236	695	250	630
	245/45R19	-	98	H	-	8J	243	703	250	750
24	255/45R19	-	100	H	-	8½J	255	713	250	800
	245/50R19	-	101	H	-	7½J	253	729	250	825
	265/50R19	-	106	H	-	8½J	277	749	250	950
	255/55R19	-	107	H	-	8J	265	763	250	975
	265/55R19	-	109	H	-	8½J	277	775	250	1030
25	235/60R19	-	103	H	-	7J	240	765	250	875
	255/60R19	-	106	S	-	7½J	245	776	250	885
	235/50R17	-	91	T	-	6½J	214	658	250	615
	215/55R17	-	94	S	-	7J	226	668	250	670
	225/55R17	-	97	S	-	7J	233	680	250	730
26	235/55R17	-	103	S	XL	7½J	245	690	290	875
	215/60R17	-	96	S	-	6½J	221	690	250	710
	225/60R17	-	103	S	XL	6½J	228	702	290	875
	225/65R17	-	102	S	-	6½J	228	724	250	850
	235/65R17	-	104	S	-	7J	240	738	250	900
27	245/65R17	-	111	S	XL	7J	248	750	290	1090
	265/65R17	-	112	S	-	8J	272	776	250	1120
	245/70R17	-	110	S	-	7J	248	776	250	1060
	255/40R18	-	99	S	XL	9J	260	661	290	775
	225/45R18	-	95	S	XL	7½J	225	659	290	690
28	245/45R18	-	100	S	XL	8J	243	677	290	800
	215/50R18	-	92	T	-	7J	226	673	250	630
	235/50R18	-	101	S	XL	7½J	245	693	290	825
	215/55R18	-	99	S	XL	7J	226	693	290	775
	235/55R18	-	104	S	XL	7½J	245	715	290	900
29	225/60R18	-	104	S	XL	6½J	228	727	290	900
	235/60R18	-	107	S	XL	7J	240	739	290	975
	245/60R18	-	105	T	-	7J	248	751	250	925
	265/60R18	-	114	S	XL	8J	272	775	290	1180
	235/65R18	-	106	T	-	7J	240	763	250	950
30	225/45R19	-	92	H	-	7½J	225	685	250	630
	235/50R19	-	99	T	-	7½J	245	719	250	775
	255/50R19	-	103	T	-	8J	265	739	250	875
	225/55R19	-	99	T	-	7J	233	731	250	775
	235/55R19	-	101	T	-	7½J	245	741	250	825
31	245/55R19	-	103	S	-	7½J	253	753	250	875
	305/30R20	-	99	Q	-	11J	313	692	250	775
	245/45R20	-	99	T	-	8J	243	728	250	775
	275/45R20	-	110	T	XL	9J	273	756	290	1060
	255/50R20	-	109	H	XL	8J	265	764	290	1030
32	235/55R20	-	105	S	XL	7½J	245	766	290	925
	255/45R21	-	102	S	-	8½J	255	736	250	850
	265/45R21	-	104	T	-	9J	266	771	250	900
	255/60R19	-	109	H	-	7½J	260	789	250	1030
	275/35R20	-	98	H	-	9½J	278	700	250	750
33	315/35R20	-	106	H	-	11J	320	728	250	950
	255/40R20	-	97	H	-	9J	260	712	250	730
	265/40R20	-	100	H	-	9½J	271	720	250	800
	275/40R20	-	102	H	-	9½J	278	728	250	850
	255/45R20	-	101	H	-	8½J	255	738	250	825
34	265/45R20	-	104	H	-	9J	266	746	250	900
	285/45R20	-	108	H	-	9½J	285	764	250	1000
	235/50R20	-	100	H	-	7½J	245	744	250	800
	245/50R20	-	102	H	-	7½J	253	754	250	850
	275/50R20	-	109	H	-	8½J	284	784	250	1030
35	285/50R20	-	112	H	-	9J	297	794	250	1120
	255/55R20	-	110	H	XL	8J	265	788	290	1060
	275/55R20	-	113	H	-	8½J	284	810	250	1150
	275/45R21	-	107	H	-	9J	273	781	250	975
	285/45R21	-	109	H	-	9½J	285	789	250	1030
36	315/35R22	-	111	H	XL	11J	320	779	290	1090
	265/40R22	-	106	H	XL	9½J	271	771	290	950
	275/40R22	-	107	H	XL	9½J	278	779	290	975
	285/40R22	-	106	H	-	10J	290	787	250	950
	285/45R22	-	110	H	-	9½J	285	815	250	1060

Rim	Size	PR	LI&SS	XL	Std.	Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
13	175/60R13	-	77	Q	-	5.00B/5J	177	540	250	412
	155/65R13	-	73	Q	-	4.50B/4½J	157	532	250	

NW103

Use of commercial light truck on ice and snow roads in winter



Excellent carrying capacity
Superior wetland performance and skid resistance
Super-strong grip on icy and snowy road

Rim Size:	14-16
Speed Rating:	R-T
Series:	65-75



REINFORCED CARCASS, THE BETTER LOAD-BEARING PERFORMANCE

■ Designed for commercial light truck with double carcass structure, it has better load-bearing performance.

SUPERIOR WETLAND PERFORMANCE AND SKID RESISTANCE


■ The tread groove design with s shape on both sides and z shape in the middle which can greatly enhance the tire drainage performance. The wide groove and asymmetrical pattern design bring excellent handling stability and outstanding drainage performance on icy and wet road.

SUPER-STRONG GRIP ON ICY AND SNOWY ROAD


■ The upgraded tread groove design can effectively strengthen the tire grip and braking performance, which ensures safety and stability in driving.



Pattern joint



The shape of groovelike "T"



Have the difference between high and low at the edge of shoulder



The more close pattern groove

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)	
14	165/70R14C	6/C	89/87	R	-	5J	170	588	375	580
	195/70R15C	8/D	104/102	R	-	6J	201	655	450	900
15	215/70R15C	8/D	109/107	R	-	6½J	221	683	450	1030
	225/70R15C	8/D	112/110	R	-	6½J	228	697	450	1120
16	195/65R16C	8/D	104/102	T	-	6J	201	660	475	900
	205/65R16C	8/D	107/105	R	-	6J	209	672	475	975

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)	
16	215/65R16C	8/D	109/107	R	-	6½J	221	686	475	1030
	225/65R16C	8/D	112/110	R	-	6½J	228	698	475	1120
	235/65R16C	8/D	115/113	R	-	7J	240	712	475	1215
	195/75R16C	8/D	107/105	T	-	5½J	196	698	475	975
	215/75R16C	8/D	113/111	R	-	6J	216	728	475	1150
	225/75R16C	10/E	121/120	R	-	6J	223	744	575	1450

